



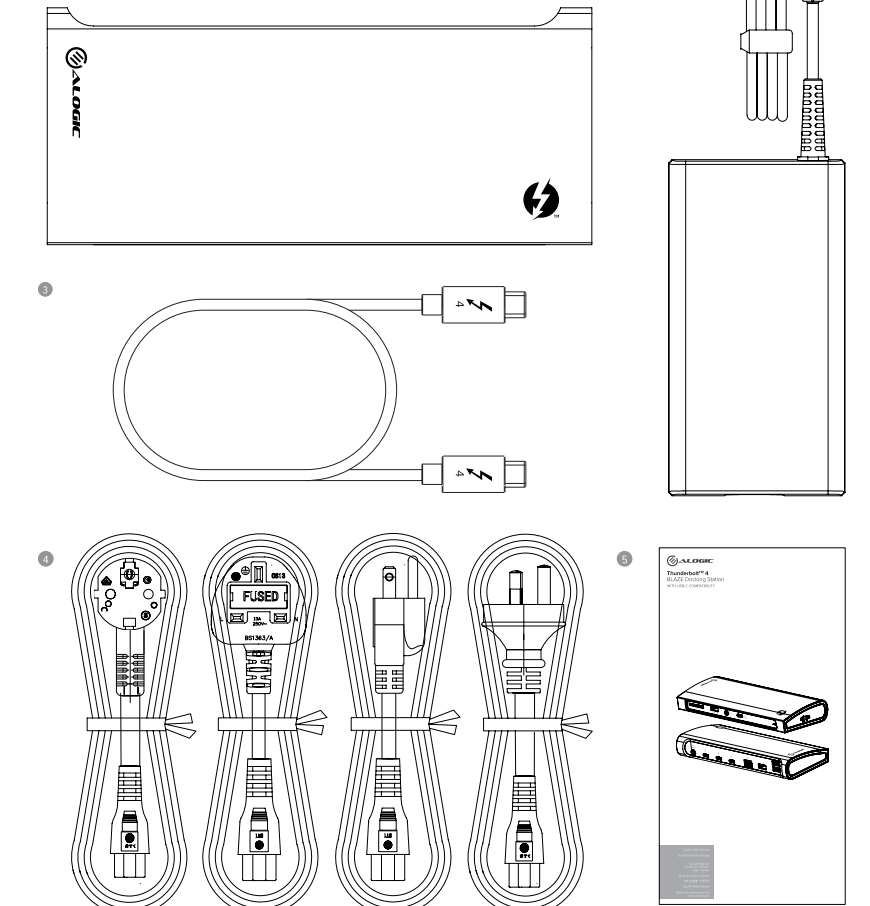

EN	Thunderbolt 4 BLAZE Docking Station	IT	Docking Station BLAZE Thunderbolt 4
DE	Thunderbolt 4 BLAZE Docking Station	JP	Thunderbolt 4 BLAZE ドッキングステーション
ES	Estación de acoplamiento Thunderbolt 4 BLAZE	AR	ثانوية اقتران بولتبريت 4 BLAZE
FR	Station d'accueil Thunderbolt 4 BLAZE	RU	Док-станция Thunderbolt 4 BLAZE


1	 Cable Thunderbolt  Кабель Thunderbolt	 كابل تاندر بولت  Кабель Thunderbolt
	 US/ UK/ EU/ AU Power Cord  US/ UK/ EU/ AU Netzstecker  Cable de alimentation US/ UK/ EU/ AU  Cordon d'alimentation US/ UK/ EU/ AU	 US/ UK/ EU/ AU 電源コード  كابل الطاقة  كابل الطاقة  Сетевой кабель US/ UK/ EU/ AU
2		

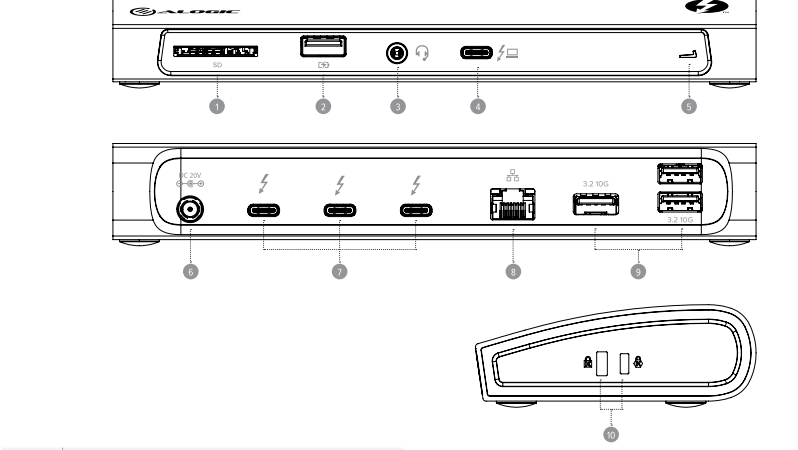

USB-A 3.2, 10Gbps, BC12.1 5A	Thunderbolt 4/USB 4.0
USB-A 3.2, 10Gbps, BC12.1 5A	Thunderbolt 4/USB 4.0
USB-A 3.2, 10Gbps, BC12.1 5A	Thunderbolt 4/USB 4.0
USB-A 3.2, 10Gbps, BC12.1 5A	Thunderbolt 4/USB 4.0
Porta USB-A 3.2, 40Gbps, BC12.1 5A	Thunderbolt 4/USB 4.0
USB-A 3.2, 10Gbps, BC12.1 5A	Thunderbolt 4/USB 4.0
پورت USB-A 3.2، 10Gbps (USB-4)، BC12.1 5A	Thunderbolt 4/USB 4.0
USB-A 3.2، 10Gbps، BC12.1 5A	Thunderbolt 4/USB 4.0
USB-A 3.2، 10Gbps، BC12.1 5A	Thunderbolt 4/USB 4.0

	USB-C mit Power Delivery (zu Computer)	USB-A 3.1 Gen 2, 10Gbps
	USB-C mit Stromversorgung (zum Computer)	USB-A 3.1 Gen 2, 10Gbps
	USB-C zum suministro de alimentación (a la computadora)	USB-A 3.1 Gen 2, 10Gbps
	USB-C avec Power Delivery (vers l'ordinateur)	USB-A 3.1 Génération 2, 10Gbps
	Porta USB-C con trasferimento di alimentazione (al computer)	Porta USB-A 3.1 Gen 2, 10 Gbps
	USB-C (電源供給用) (コンピュータへ)	USB-A 3.1 Gen 2, 10Gbps
	داخلي USB-C (تغذية الطاقة) (للبطاقة الحاسوبية)	USB-A 3.1 الجيل 2، 10 جابت
	داخلي USB-C (تغذية الطاقة) (للبطاقة الحاسوبية)	USB-A 3.1 الجيل 2، 10 جابت
	USB-C (запитка) (к компьютеру)	USB-A 3.1 Gen 2, 10Gbps
	داخلي USB-C (تغذية الطاقة) (للبطاقة الحاسوبية)	USB-A 3.1 الجيل 2، 10 جابت

4	USB-C avec Power Delivery (vers l'ordinateur) Porta USB-C con trasferimento di alimentazione (al computer) USB-C 電源供給 (コンピュータへ) USB-C مع Power Delivery (نحو الحاسوب) Разъем USB-C с функцией быстрой зарядки	5	USB-A 3.1 Génération 2, 10Gbps Porta USB-A 3.1 Gen 2, 10 Gbps USB-A 3.1 Gen 2, 10Gbps USB-A 3.1 الجيل 2 (USB-A) 3.1 10 جيجابت في الثانية
---	--	---	--

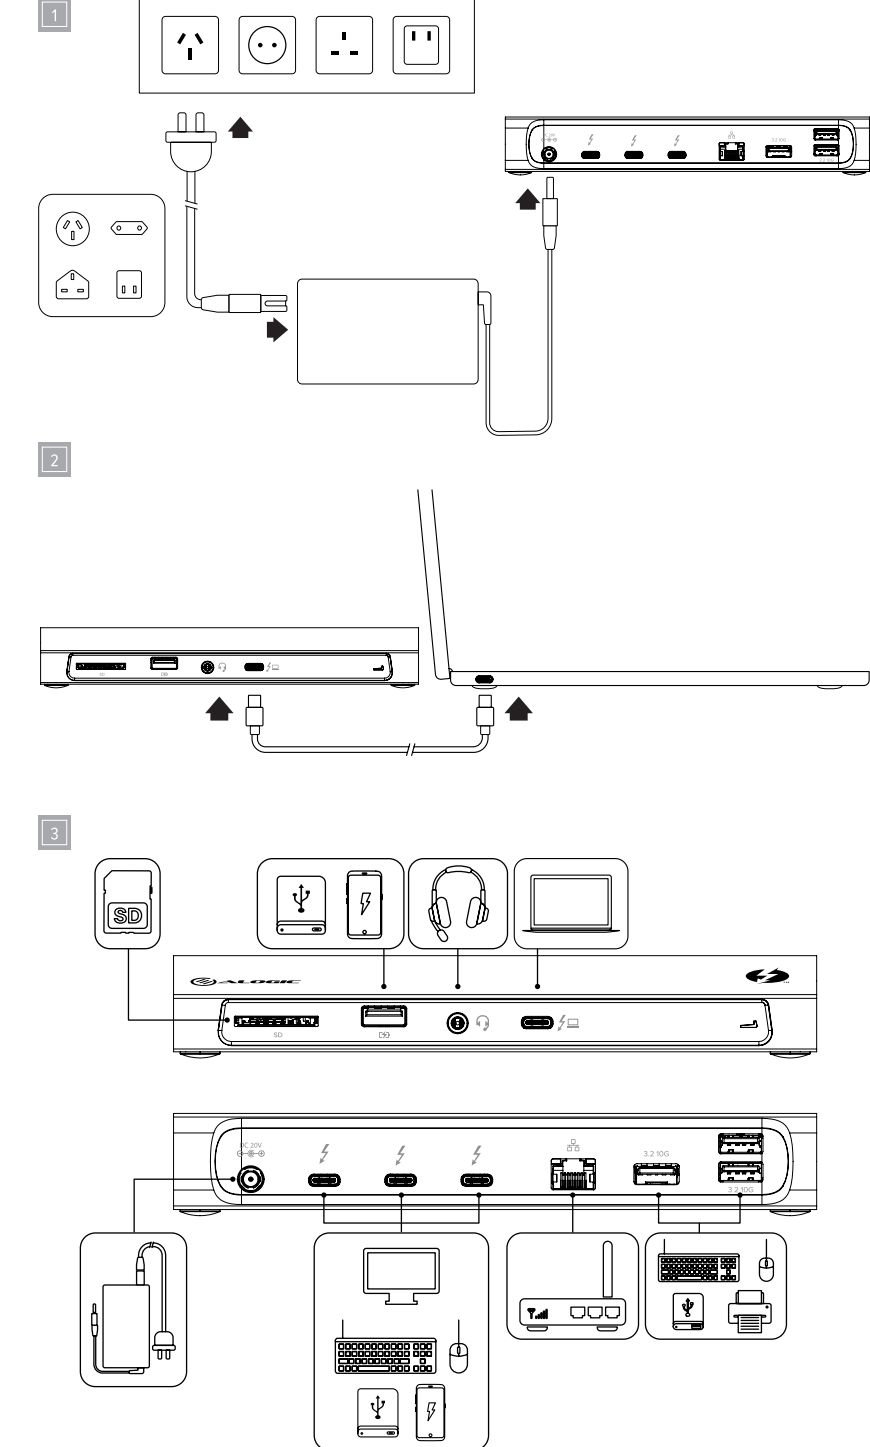

Model Modell Modelo Modèle Modello 原形 原型 Modelo	TB403TB
Dimensions Dimensionen Dimensiones Dimensionen Dimensions 大きさ 長さ 幅 高さ 深さ	194 x 84 x 30mm (L x W x H)
Weight Gewicht Peso Poids Peso 重量 重量 重量 重量 重量	380g

Output / Output / Salida / Sortie / Output / 出力 / 出力 / 出力 / 出力		2 x USB-A Thunderbolt 4/USB 4, 40Gbps, 3A 1 x USB-A 3.1 Gen 2, 10Gbps 1 x USB-A 2.0, 480Mbps, BC12.1 15A 1 x 3.5mm Combo Jack	1 x Gigabit Ethernet Port 1 x SD Card Reader (SD 4.0) Up to 96W power to laptop
		2 x USB-C Thunderbolt 4/USB 4, 40Gbps, 3A 1 x USB-A 3.1 Gen 2, 10Gbps 1 x USB-A 2.0, 480Mbps, BC12.1 15A 1 x 3.5mm Kombianschluss	1 x Gigabit Ethernet Port 1 x SD Kartenleser (SD 4.0) Bis zu 96W Leistung zum Laptop
		2 x USB-C Thunderbolt 4/USB 4, 40Gbps, 3A 1 x USB-A 3.1 Gen 2, 10Gbps 1 x USB-A 2.0, 480Mbps, BC12.1 15A 1 x 3.5mm Connector combined	1 Puerto Ethernet Gigabit 1 Lecteur de tarjetas SD (SD 4.0) Hasta 96W de potencia a ordenador portátil
		2 x USB-C Thunderbolt 4/USB 4, 40Gbps, 3A 1 x USB-A 3.1 Generation 2, 10Gbps 1 x USB-A 2.0, 480Mbps, BC12.1 15A 1 x 3.5 mm Combine Jack* (split combine)	1 Porta Ethernet Gigabit 1 lettore di schede SD (SD 4.0) A richiesta di potenza di 96 W per la ricarica di un laptop
Input / Input / Entrada / Entrée / Input / 入力 / 入力 / 入力 / 入力		3 ports USB-A 3.1 Gen 2, 10 Gbps 1 port USB-A 2.0, 480 Mbps, BC 12.1 5 A 1 jack combo 3.5 mm	1 porte Ethernet Gigabit 1 lecteur de schédes SD (SD 4.0) Fourniture de puissance d'un 96 W par la recharge d'un laptop
		3 x USB-C Thunderbolt 4/USB 4, 40Gbps, 3A 1 x USB-A 3.1 Gen 2, 10Gbps 1 x USB-A 2.0, 480Mbps, BC12.1 15A 1 x 3.5mm Combo Jack* * 3.5mm 2 in 1 Split Jack	1 x 3.5mm 2 in 1 Split Jack 1 x SD Card Reader (SD 4.0) Up to 96W power to laptop
		3 x USB-C Thunderbolt 4/USB 4, 40Gbps, 3A 1 x USB-A 3.1 Gen 2, 10 Gbps 1 x USB-A 2.0, 480 Mbps, BC 12.1 5 A 1 x 3.5mm Connector combined	1 x 3.5mm 2 in 1 Split Jack 1 x SD Kartenleser (SD 4.0) Bis zu 96W Leistung zum Laptop
		3 x USB-C Thunderbolt 4/USB 4, 40Gbps, 3A 1 x USB-A 3.1 Gen 2, 10 Gbps 1 x USB-A 2.0, 480 Mbps, BC 12.1 5 A 1 x 3.5mm Connector combined	1 x 3.5mm 2 in 1 Split Jack 1 x SD Card Reader (SD 4.0) Up to 96W power to laptop

Power / Leistung / Poder / Alimentación / Potenza / 電力 / 電源	135W External Power Adapter (supplied) Can provide up to 96W power to computer	135W 外部電源アダプタ (付属) 最大 96W の電力を PC に供給可能
	135W External Power Adapter (integrated) Can work by up 96W Leistung on any Computer lefen	135W 外部電源アダプタ (統合) 任意の PC に最大 96W の電力を供給可能
	Unit of domestic electricity source 135W (inculca) Acquisto power summario hasta 96W de potencia a computadora	国内電力源の単位 135W (含む) 最大 96W の電力を PC に供給可能
	Adaptateur d'alimentation externe 135W (fourmi) Permet de fournir jusqu'à 96W d'alimentation à l'ordinateur	135W 外部電源アダプタ (付属) 最大 96W の電力を PC に供給可能

 Video Resolution VideoCasting Video Resolution VideoCasting 3D Resolution 3D Resolution 3D Resolution 3D Resolution 3D Resolution 3D Resolution	Thunderbolt 3/4, USB 4 & Hosts Dual Display, 4K (3840 × 2160) @ 60Hz* *MI based Apple devices can only support a single external monitor connected via Thunderbolt or USB-C. Thunderbolt Alternate Mode USB-C port may be DisplayPort 1.2 compatible or DisplayPort 1.4 compatible, depending on the Thunderbolt port. Thunderbolt 3/4 will support resolutions up to 2560x1600 @ 60Hz or 4K @ 30Hz. Thunderbolt 3/4, USB 4 & Hosts DisplayPort, 4K (3840 × 2160) @ 60Hz* *MI basierende Apple-Geräte können nur einen externen Bildschirm, durch Thunderbolt oder USB-C DisplayPort Alternate Mode angeschlossene, unterstützen. Thunderbolt-Port kann DisplayPort 1.2 kompatibel oder DisplayPort 1.4 kompatibel sein. Thunderbolt 3/4 unterstützt Auflösungen von bis zu 2560x1600 bei 60Hz oder 4K bei 30Hz. Thunderbolt 3/4, USB 4 & Hosts Parallel Dual, 4K (3840 × 2160) @ 60Hz* *Dispositivos Apple basados en M1 solo pueden admitir un monitor externo individual conectado mediante Thunderbolt o USB-C. Thunderbolt Alternate Mode USB-C puede ser DisplayPort 1.2 compatible o DisplayPort 1.4 compatible, dependiendo del puerto Thunderbolt. Thunderbolt 3/4 soportará resoluciones de hasta 2560x1600 @ 60Hz o 4K @ 30Hz. Thunderbolt 3/4, USB 4 & Hosts Double External, 4K (3840 × 2160) @ 60 Hz* *Les appareils Apple basés sur M1 ne peuvent prendre en charge qu'un seul écran externe connecté via Thunderbolt ou USB-C. Thunderbolt Alternate Mode USB-C peut être compatible DisplayPort 1.2 ou compatible DisplayPort 1.4, selon le port Thunderbolt. Thunderbolt 3/4 prendra en charge des résolutions allant jusqu'à 2560x1600 à 60 Hz ou 4K à 30 Hz. Alimentatore esterno da 110 W (picco) Supporto USB-C, USB 3.x Thunderbolt 3/4 (2 porte) a 2560x1600 a 60Hz o 4K a 30 Hz	USB-C 3/4 & Hosts Single Display, 4K (3840 × 2160) up to 60Hz* USB-C 3/4 & Hosts DisplayPort, 4K (3840 × 2160) (up to 60Hz)* USB-C 3/4 & Hosts Parallel Dual, 4K (3840 × 2160) @ 60Hz* *Dispositivos Apple basados en M1 solo pueden admitir un monitor externo individual conectado mediante Thunderbolt o USB-C. Thunderbolt Alternate Mode USB-C puede ser DisplayPort 1.2 compatible o DisplayPort 1.4 compatible, dependiendo del puerto Thunderbolt. Thunderbolt 3/4 soportará resoluciones de hasta 2560x1600 @ 60Hz o 4K @ 30Hz. USB-C 3/4 & Hosts Ecran simple, 4K (3840 × 2160) jusqu'à 60 Hz* Supporto USB-C, USB 3.x Thunderbolt 3/4 (2 porte) a 2560x1600 a 60Hz o 4K a 30 Hz USB-C 3/4 & Hosts Single Display, 4K (3840 × 2160) up to 60Hz* USB-C 3/4 & Hosts DisplayPort, 4K (3840 × 2160) (up to 60Hz)* USB-C 3/4 & Hosts Parallel Dual, 4K (3840 × 2160) @ 60Hz* *Dispositivos Apple basados en M1 solo pueden admitir un monitor externo individual conectado mediante Thunderbolt o USB-C. Thunderbolt Alternate Mode USB-C puede ser DisplayPort 1.2 compatible o DisplayPort 1.4 compatible, dependiendo del puerto Thunderbolt. Thunderbolt 3/4 soportará resoluciones de hasta 2560x1600 @ 60Hz o 4K @ 30Hz.
--	--	---

Video Resolution (VideoResolution) / Video Resolution (Resolution) Resolution Video / 映像解像度 Resolution Video / 映像解像度	3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0	3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0
Video Resolution (VideoResolution) / Video Resolution (Resolution) Resolution Video / 映像解像度 Resolution Video / 映像解像度	3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0	3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0 3.0 USB-C to USB-A Cable 4.0

	3x USB-C 4.0 up to 40Gbps 1x USB-A 3.1 Gen 2 700Mbps 1x USB-A 3.1 Gen 2 480Mbps 1x Gigabit Ethernet port: 10/100/1000Mbps 3x USB-C 4.0, bis zu 40Gbps 1x USB-A 3.1 Gen 2 700Mbps 1x USB-A 3.1 Gen 2 480Mbps 1x Gigabit Ethernet Port: 10/100/1000Mbps 3x USB-C 4.0, hasta 40Gbps 1x USB-A 3.1 Gen 2 700bps 1x USB-A 3.1 Gen 2 480Mbps 1x puerto Ethernet Gigabit: 10/100/1000Mbps 3x USB-C 4.0, jusqu'à 40Gbps 1x USB-A 3.1 Gen 2 700Mbps 1x USB-A 3.1 Gen 2 480Mbps 1x port Ethernet Gigabit: 10/100/1000Mbps 3 porte USB-C 4.0, fino a 40 Gbps 3 porte USB-A 3.1 Gen 2, 10 Gbps 1 porte USB-A 2.0 480 Mbps 1 porte Ethernet Gigabit: 10/100/1000 Mbps	3x USB-C 4.0, up to 40Gbps 1x USB-A 3.1 Gen 2 700Mbps 1x USB-A 3.1 Gen 2 480Mbps 1x Gigabit Ethernet port: 10/100/1000Mbps 3x USB-C 4.0, bis zu 40Gbps 1x USB-A 3.1 Gen 2 700Mbps 1x USB-A 3.1 Gen 2 480Mbps 1x Gigabit Ethernet Port: 10/100/1000Mbps 3x USB-C 4.0, hasta 40Gbps 1x USB-A 3.1 Gen 2 700bps 1x USB-A 3.1 Gen 2 480Mbps 1x puerto Ethernet Gigabit: 10/100/1000Mbps 3x USB-C 4.0, jusqu'à 40Gbps 1x USB-A 3.1 Gen 2 700Mbps 1x USB-A 3.1 Gen 2 480Mbps 1x port Ethernet Gigabit: 10/100/1000Mbps 3 porte USB-C 4.0, fino a 40 Gbps 3 porte USB-A 3.1 Gen 2, 10 Gbps 1 porte USB-A 2.0 480 Mbps 1 porte Ethernet Gigabit: 10/100/1000 Mbps
Data Rate Datarate Velocidad de datos Débit de données Velocità di trasferimento dei dati Дрейт переноса данных		
Audio Support Audio-Unterstützung Supporto audio Поддержка аудио Система / Поддержка аудиосигнала	Analogue audio /Innere microphone Input Analoge Audoteileitung/Mikrofon-Einlass Analogue audio input/analog/microphone Entree/sortie ligne analogique/microphone	Ingress/audio analogue /Innemic アナログオーディオ入力/マイクロフォンプン/アクト آنالوگ آودیو ورودی/آنالوگ/میکروفون پورت Аналоговое аудио /вход микрофона вход/ выход
Security Sicherheit Seguridad Sécurité Sicurezza セキュリティ Безопасность	1 x Lock Slot 1 x Nano Lock Slot 1 x Beckschloss 1 x Nano Schloßschloss 1 fente de verrouillage Nano 1 fente de verrouillage Nano 1 fente de verrouillage 1 fente de verrouillage Nano	1 slot per lucchetto 1 slot Nano per lucchetto 1 x 施錠スロット 1 x ナノロックスロット 1 x 施錠口 1 x ナノ施錠口 1 fente susecure 1 fente susecure Nano
Device Compatibility Gerätekompatibilität Compatibilità dei dispositivi Aparejos Compatibles Compatibilità apparecchi 互換 Cəvahişililik Совместимость устройств	Mac OS Sierra 1013 or later with Thunderbolt 3 or 4 port Windows 10 with USB-C or Thunderbolt 3 or 4 port Mac OS Sierra 1013 oder neuer mit Thunderbolt 3 oder 4 Port Windows 10 mit USB-C oder Thunderbolt 3 oder 4 Port Mac OS Sierra 1013 o posterior con puerto Thunderbolt 3 o 4 Windows 10 con puerto USB-C o Thunderbolt 3 o 4 Mac OS Sierra 1013 ou ultérieur avec thunderbolt 3 ou 4 Windows 10 avec port USB-C ou Thunderbolt 3 ou 4 Mac OS Sierra 1013 o version successive con una porta Thunderbolt 3 o 4 Windows 10 con una porta USB-C o Thunderbolt 3 o 4 Thunderbolt 3または4ポートを必要とし、Mac OS Sierra 10.13以降のUSB-CまたはThunderbolt 3または4ポートを接続したWindows 10 Mac OS Sierra 1013 xeläni və ya sonrası nı Thunderbolt 3 vne 4 Windows 10 nıporus USB-C nelo Thunderbolt 3 vne 4	

Compliance Beachtung Acuerdo Conformité Conformità コンプライアンス التوافق Соблюдение нормативов	 CE, FCC, RCM	 CE, FCC, RCM	 CE, FCC, RCM	 CE, FCC, RCM
	 CE, FCC	 CE, FCC, RCM	 CE, FCC, RCM	 CE, FCC, RCM
Warranty Garantie Garantia Garantie Garanzia 保証 الضمان Гарантия	 2 Years	 2 Años	 2 Anni	 2 سنوات (2)
	 2 Jahre	 2 Ans	 2 年間	 2 года

- This device is designed for indoors use only.
- Do not deliberately damage the device or expose it to damp, direct sunlight, or high temperature conditions.
- Disassembling or failing to properly use and care for your device will void the warranty on the product.
- ALODIC bears no responsibility for damage to the device or incidental damages arising from improper use or lack of care and is not liable for repair/replacement of the device or other damages in these circumstances.

- Dieses Gerät ist nur für die Nutzung im Inneren vorgesehen.
- Beschädigen Sie das Gerät nicht absichtlich und setzen Sie es nicht Feuchtigkeit, direkter Sonneneinstrahlung oder hohen Temperaturen aus.
- Wenn Sie Ihr Gerät zerlegen oder nicht ordnungsgemäß verwenden und pflegen, erlischt die Garantie für das Produkt.
- ALOIC übernimmt keine Verantwortung für Schäden am Gerät oder dessen Zubehör, die durch unsachgemäße Verwendung oder mangelnde Pflege entstehen, und haftet unter diesen Umständen nicht für die Reparatur / den Austausch des Geräts oder anderen Zubehörteilen.

- Este dispositivo está diseñado para uso en interiores únicamente.
- No dañe deliberadamente el dispositivo ni lo exponga a la humedad, la luz solar directa o condiciones de alta temperatura.
- Desarmar o no usar y cuidar adecuadamente su dispositivo anulará la garantía del producto.
- ALOCIG no asume ninguna responsabilidad por daños al dispositivo o daños incidentales que surjan de un uso inadecuado o falta de cuidado y no es responsable de la reparación / reemplazo del dispositivo u otros daños en estas circunstancias.

- Ce produit est destiné à un usage en intérieur exclusivement.
- Ne pas endommager l'appareil délibérément ou bien l'exposer à l'humidité, la lumière directe du soleil, ou des températures élevées.
- Tout désassemblage ou utilisation malpropre de votre appareil entraînera l'annulation de votre garantie.
- ALOGIC ne sera pas responsable des dommages causés à l'appareil, ou des dommages liés à une mauvaise utilisation ou un manque de soin et ne sera pas tenu d'assurer la réparation/le remplacement de l'appareil dans ces circonstances.

- Apparecchio da non usare all'aperto.
- Non danneggiare deliberatamente l'apparecchio, non esporlo a umidità, ai raggi diretti del sole o a temperature eccessivamente alte.
- Smontare, trattare o usare l'apparecchio in modo improprio annullerà la garanzia del prodotto.
- ALOGIC non si assume alcuna responsabilità per danni all'apparecchio o danni accidentali dovuti all'uso improprio o alla mancata attenzione, non ritenendosi responsabile per riparazione/sostituzione dell'apparecchio o per altri danni in queste circostanze.

- ※本装置は屋内での使用のみを目的としています。
- ※装置を故意に損傷させたり、湿気のある場所、直射日光の当たる場所、高温になる場所に放置しないでください。
- ※装置を分解したり、適切な使用方法や手入れを怠った場合には、製品の保証が有効となりません。
- ※ALOGICは、お客様の不適切な使用や不注意から生じた装置の破損や付随的な損害については、一切の責任を負いませんのでご了承ください。

[illegible]

- Это устройство предназначено для использования только в помещении.
- Не допускайте повреждения устройства, не подвергайте воздействию на него влаги, прямых солнечных лучей или высоких температур.
- В случае признаков разболки либо ненадлежащего использования и обращения гарантийные обязательства будут отменены
- Компания ALogic не несет никакой ответственности за повреждение устройства или косвенных ущерб, возникшие в результате неправильной эксплуатации или ненадлежащего ухода и не обязана производить ремонт или замену устройства при таких обстоятельствах.

NOTE: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

Este dispositivo cumple con la Parte 15 de las reglas de la FCC. El funcionamiento está sujeta a las dos condiciones siguientes:

NOTA: Cualquier cambio o modificación a esta unidad no aprobado expresamente por los responsables en el acuerdo, podría anular la autoridad del usuario para operar el equipo.

NOTA: Cualquier cambio o modificación a esta unidad no aprobado expresamente por los responsables en el acuerdo, podría anular la autoridad del usuario para operar el equipo.

NOTA: Cualquier cambio o modificación a esta unidad no aprobado expresamente por los responsables en el acuerdo, podría anular la autoridad del usuario para operar el equipo.



The ALOGIC TB430TB Thunderbolt 4 docking station allows for connection of up to two external displays and a host of other accessories allowing you to use your laptop as a desktop workstation.

The dock is compatible with Thunderbolt 4 and Thunderbolt 3 equipped computers as well as with standard USB-C. When used with non-Thunderbolt equipped computers the available video output resolutions may be reduced (exact capabilities depend on the specifications of the host computer).

Instructions

(Refer to the images on the previous pages)

Powering the Dock

The dock is supplied with a mains power adapter and mains power cords for use in most regions. Connect the power cord that is suitable for your region to the power supply port on the back of the dock. The power supply port is located on the rear of the dock. The mains power cable plug will fit available mains power outlet.

The dock turns on when power is connected and the power indicator LED will illuminate to show that it is switched on and operating.

Connecting the Dock to the Laptop

Connect the included Thunderbolt 4 cable between the dock and your computer.

The device is Plug and Play compatible and will be detected and configured by your computer automatically. This process will take a few seconds the first time you plug the device into your laptop. You may receive a notification that it has been installed and is ready for use.

Once the device has been recognised and set up by your computer it is ready for use and you can connect other devices as desired such as monitors, USB devices and a network cable.

When connected to a computer that supports charging using USB Power Delivery (USB PD), the dock can supply up to 95W of power to charge the computer.

Not all USB-C ports on Windows computers support video output. If connecting the dock to a non-Thunderbolt USB-C port, ensure that you connect the dock to a port that is video capable.

Refer to the USB-C Port Video Support section of this manual for further details.

Not every USB-C port on notebook computers supports charging. If connecting the dock to a non-Thunderbolt USB-C port and your computer does not support charging, the dock will not charge the computer. To determine if a port supports charging, consult the computer's manual to determine which ports accept power from USB PD power sources.

Refer to the USB-C Port Video Support section of this manual for further details.

Connecting Devices to the Dock

Connect external devices such as monitors, USB devices, Ethernet network cable and headphone/mic to the dock, as necessary. Refer to Page 2 and 3 for these instructions for an outline of the available ports and their functions.

Monitors which have a USB-C or Thunderbolt video input can be connected directly to the dock on the rear of the dock using a USB-C to USB-C cable. If connecting to a monitor with a traditional video input (DisplayPort, HDMI, DVI or VGA) you will need to use a USB-C video cable with an output that supports the connector on the monitor that you wish to connect to.

ALOGIC recommend the following products to connect the dock to monitors that do not have a USB-C video input:

A list of compatible video cables and adapters can be found at [alogic.com/tb4](https://www.alogic.com/tb4)

Video Resolution Support Table

The quantity and resolution of video output supported depend on whether the dock is connected to a Thunderbolt port or non-Thunderbolt USB-C port on the host computer. When connected to a USB-C port which does not support video output, the maximum resolution supported is 1080p. When connected to a Thunderbolt port or a USB-C port which supports video output using the version of DisplayPort Alternate mode supported by the computer.

Note that Apple Mac computers which use an Apple M1 processor can only output a single image through this dock.

Operating System	Number of Displays Supported	Single Monitor Max Resolution	Dual Monitor Max Resolution
Thunderbolt	2	7680x4320 60Hz	2x 3840x2160 60Hz
Windows	2	7680x4320 60Hz	2x 3840x2160 60Hz
Mac OS	2	7680x4320 60Hz	2x 3840x2160 60Hz
Linux	2	7680x4320 60Hz	2x 3840x2160 60Hz

When connected to a non-Thunderbolt USB-C port, the following maximum resolutions are available depending on the version of USB-C DisplayPort alternate mode supported by the computer:

Operating System	Single Monitor Max Resolution	Dual Monitor Max Resolution
Windows	7680x4320 60Hz	2x 3840x2160 60Hz
Mac OS	7680x4320 60Hz	2x 3840x2160 60Hz
Linux	7680x4320 60Hz	2x 3840x2160 60Hz

USB-C Port Video Support

All Thunderbolt USB-C Ports unterstützen Videoausgabe.

Many Windows and Chromebook computers which don't have Thunderbolt support support Thunderbolt also support video output, but many don't. Many Windows and Chromebook computers which don't have Thunderbolt support support Thunderbolt also support video output, but many don't. Many Windows and Chromebook computers which don't have Thunderbolt support support Thunderbolt also support video output, but many don't. Many Windows and Chromebook computers which don't have Thunderbolt support support Thunderbolt also support video output, but many don't.

Many USB-C ports that have no labelling support video output, however USB-C ports which have a DisplayPort logo or that Thunderbolt logo printed next to them almost certainly support video output and you should look for them on the computer itself. Many USB-C ports that have no labelling support video output, however USB-C ports which have a DisplayPort logo or that Thunderbolt logo printed next to them almost certainly support video output and you should look for them on the computer itself.

If in doubt about whether a USB-C port supports video output, consult the user manual for your computer or the support information on the manufacturer's website.

The device can be used with USB-C ports which do not support video output, however you will not be able to connect the Thunderbolt ports on the rear of the dock to external monitors and show video. The other ports (Ethernet, audio and USB ports) will all be functional.

Troubleshooting

Symptom	Solution
Video doesn't show on external display	- Ensure that the power supply is plugged into the dock and switched on at the wall - Check that the USB-C video cable is connected securely between the monitor and device and the device is securely connected to the computer - Check that the external monitor is turned on and set to the correct input - Check that your computer is detecting the external display and is set to show video on it - Check that the external monitor is connected to the dock using a Thunderbolt port or a USB-C port that supports video output using an external display
Video doesn't show on external display	- Check that the USB-C video cable is connected securely between the monitor and device and the device is securely connected to the computer - Check that the external monitor is turned on and set to the correct input - Check that your computer is detecting the external display and is set to show video on it - Check that the external monitor is connected to the dock using a Thunderbolt port or a USB-C port that supports video output using an external display
Video drops out intermittently	- Check that the USB-C video cable is connected securely between the display and device - Check that the device is securely connected to the computer - Check that the USB-C video cable being used to connect to the display is of good quality and isn't damaged
Computer doesn't start charging when the device is connected	- Ensure that the power supply is connected at the wall and turned on, and the USB-C cable supplying power is securely connected to the computer - Verify that the port on the computer is a Thunderbolt port or a USB-C port that supports charging using a USB PD power source

ALOGIC recommend the use of ALOGIC cables to ensure reliable, trouble free operation for your computer and peripherals.

ALOGIC empfiehlt den Gebrauch von ALOGIC Kabeln, um einen verlässlichen, problemlosen Betrieb Ihres Computers und Ihrer Zusatzgeräte zu gewährleisten.

La estación de acoplamiento ALOGIC TB430TB Thunderbolt 4 permite la conexión de hasta dos pantallas externas y un host de otros accesorios permitiéndole usar su ordenador portátil como una estación de trabajo de escritorio.

The dock is compatible with Thunderbolt 4 and Thunderbolt 3 equipped computers as well as with standard USB-C. When used with non-Thunderbolt equipped computers the available video output resolutions may be reduced (exact capabilities depend on the specifications of the host computer).

Anweisungen

(Betrachten Sie sich auf die Bilder auf den vorherigen Seiten)

Laden des Docks

The dock is supplied with a mains power adapter and mains power cords for use in most regions. Connect the power cord that is suitable for your region to the power supply port on the back of the dock. The power supply port is located on the rear of the dock. The mains power cable plug will fit available mains power outlet.

The dock turns on when power is connected and the power indicator LED will illuminate to show that it is switched on and operating.

Das Dock an das Laptop anschließen

Verbinden Sie mit dem mitgelieferten Thunderbolt 4 Kabel das Dock und Ihren Computer.

The device is Plug-and-Play compatible and will be detected and configured automatically when your computer starts. This process will take a few seconds the first time you plug the device into your laptop. You may receive a notification that it has been installed and is ready for use.

Once the device has been recognised and set up by your computer it is ready for use and you can connect other devices as desired such as monitors, USB devices and a network cable.

When connected to a computer that supports charging using USB Power Delivery (USB PD), the dock can supply up to 95W of power to charge the computer.

Not all USB-C ports on Windows computers support video output. If connecting the dock to a non-Thunderbolt USB-C port, ensure that you connect the dock to a port that is video capable.

Refer to the USB-C Port Video Support section of this manual for further details.

Not every USB-C port on notebook computers supports charging. If connecting the dock to a non-Thunderbolt USB-C port and your computer does not support charging, the dock will not charge the computer. To determine if a port supports charging, consult the computer's manual to determine which ports accept power from USB PD power sources.

Refer to the USB-C Port Video Support section of this manual for further details.

Connecting Devices to the Dock

Connect external devices such as monitors, USB devices, Ethernet network cable and headphone/mic to the dock, as necessary. Refer to Page 2 and 3 for these instructions for an outline of the available ports and their functions.

Monitors which have a USB-C or Thunderbolt video input can be connected directly to the dock on the rear of the dock using a USB-C to USB-C cable. If connecting to a monitor with a traditional video input (DisplayPort, HDMI, DVI or VGA) you will need to use a USB-C video cable with an output that supports the connector on the monitor that you wish to connect to.

ALOGIC recommend the following products to connect the dock to monitors that do not have a USB-C video input:

A list of compatible video cables and adapters can be found at [alogic.com/tb4](https://www.alogic.com/tb4)

Tableta de resolución de video

The quantity and resolution of video output supported depend on whether the dock is connected to a Thunderbolt port or non-Thunderbolt USB-C port on the host computer. When connected to a USB-C port which does not support video output, the maximum resolution supported is 1080p. When connected to a Thunderbolt port or a USB-C port which supports video output using the version of DisplayPort Alternate mode supported by the computer.

Note that Apple Mac computers which use an Apple M1 processor can only output a single image through this dock.

Operating System	Number of Displays Supported	Single Monitor Max Resolution	Dual Monitor Max Resolution
Thunderbolt	2	7680x4320 60Hz	2x 3840x2160 60Hz
Windows	2	7680x4320 60Hz	2x 3840x2160 60Hz
Mac OS	2	7680x4320 60Hz	2x 3840x2160 60Hz
Linux	2	7680x4320 60Hz	2x 3840x2160 60Hz

When connected to a non-Thunderbolt USB-C port, the following maximum resolutions are available depending on the version of USB-C DisplayPort alternate mode supported by the computer:

Operating System	Single Monitor Max Resolution	Dual Monitor Max Resolution
Windows	7680x4320 60Hz	2x 3840x2160 60Hz
Mac OS	7680x4320 60Hz	2x 3840x2160 60Hz
Linux	7680x4320 60Hz	2x 3840x2160 60Hz

USB-C Port Video Unterstützung

All Thunderbolt USB-C Ports unterstützen Videoausgabe.

Many Windows and Chromebook computers which don't have Thunderbolt support support Thunderbolt also support video output, but many don't. Many Windows and Chromebook computers which don't have Thunderbolt support support Thunderbolt also support video output, but many don't. Many Windows and Chromebook computers which don't have Thunderbolt support support Thunderbolt also support video output, but many don't.

Many USB-C ports that have no labelling support video output, however USB-C ports which have a DisplayPort logo or that Thunderbolt logo printed next to them almost certainly support video output and you should look for them on the computer itself. Many USB-C ports that have no labelling support video output, however USB-C ports which have a DisplayPort logo or that Thunderbolt logo printed next to them almost certainly support video output and you should look for them on the computer itself.

If in doubt about whether a USB-C port supports video output, consult the user manual for your computer or the support information on the manufacturer's website.

The device can be used with USB-C ports which do not support video output, however you will not be able to connect the Thunderbolt ports on the rear of the dock to external monitors and show video. The other ports (Ethernet, audio and USB ports) will all be functional.

Troubleshooting

Symptom	Solution
Video doesn't show on external display	- Ensure that the power supply is plugged into the dock and switched on at the wall - Check that the USB-C video cable is connected securely between the monitor and device and the device is securely connected to the computer - Check that the external monitor is turned on and set to the correct input - Check that your computer is detecting the external display and is set to show video on it - Check that the external monitor is connected to the dock using a Thunderbolt port or a USB-C port that supports video output using an external display
Video drops out intermittently	- Check that the USB-C video cable is connected securely between the display and device - Check that the device is securely connected to the computer - Check that the USB-C video cable being used to connect to the display is of good quality and isn't damaged
Computer doesn't start charging when the device is connected	- Ensure that the power supply is connected at the wall and turned on, and the USB-C cable supplying power is securely connected to the computer - Verify that the port on the computer is a Thunderbolt port or a USB-C port that supports charging using a USB PD power source

ALOGIC empfiehlt den Gebrauch von ALOGIC Kabeln, um einen verlässlichen, problemlosen Betrieb Ihres Computers und Ihrer Zusatzgeräte zu gewährleisten.

La estación de acoplamiento ALOGIC TB430TB Thunderbolt 4 permite la conexión de hasta dos pantallas externas y un host de otros accesorios permitiéndole usar su ordenador portátil como una estación de trabajo de escritorio.

The dock is compatible with Thunderbolt 4 and Thunderbolt 3 equipped computers as well as with standard USB-C. When used with non-Thunderbolt equipped computers the available video output resolutions may be reduced (exact capabilities depend on the specifications of the host computer).

Instrucciones

(Consulte las imágenes en las páginas anteriores)

Alimentando el Acoplador

The dock is supplied with a mains power adapter and mains power cords for use in most regions. Connect the power cord that is suitable for your region to the power supply port on the back of the dock. The power supply port is located on the rear of the dock. The mains power cable plug will fit available mains power outlet.

The dock turns on when power is connected and the power indicator LED will illuminate to show that it is switched on and operating.

Conectando el acoplador al ordenador portátil

Conecte el cable Thunderbolt 4 incluido entre el acoplador y su computadora.

The device is Plug-and-Play compatible and will be detected and configured automatically when your computer starts. This process will take a few seconds the first time you plug the device into your laptop. You may receive a notification that it has been installed and is ready for use.

Once the device has been recognised and set up by your computer it is ready for use and you can connect other devices as desired such as monitors, USB devices and a network cable.

When connected to a computer that supports charging using USB Power Delivery (USB PD), the dock can supply up to 95W of power to charge the computer.

Not all USB-C ports on Windows computers support video output. If connecting the dock to a non-Thunderbolt USB-C port, ensure that you connect the dock to a port that is video capable.

Refer to the USB-C Port Video Support section of this manual for further details.

Not every USB-C port on notebook computers supports charging. If connecting the dock to a non-Thunderbolt USB-C port and your computer does not support charging, the dock will not charge the computer. To determine if a port supports charging, consult the computer's manual to determine which ports accept power from USB PD power sources.

Refer to the USB-C Port Video Support section of this manual for further details.

Connecting Devices to the Dock

Connect external devices such as monitors, USB devices, Ethernet network cable and headphone/mic to the dock, as necessary. Refer to Page 2 and 3 for these instructions for an outline of the available ports and their functions.

Monitors which have a USB-C or Thunderbolt video input can be connected directly to the dock on the rear of the dock using a USB-C to USB-C cable. If connecting to a monitor with a traditional video input (DisplayPort, HDMI, DVI or VGA) you will need to use a USB-C video cable with an output that supports the connector on the monitor that you wish to connect to.

ALOGIC recommend the following products to connect the dock to monitors that do not have a USB-C video input:

A list of compatible video cables and adapters can be found at [alogic.com/tb4](https://www.alogic.com/tb4)

Table de prise en charge des résolutions vidéo

The quantity and resolution of video output supported depend on whether the dock is connected to a Thunderbolt port or non-Thunderbolt USB-C port on the host computer. When connected to a USB-C port which does not support video output, the maximum resolution supported is 1080p. When connected to a Thunderbolt port or a USB-C port which supports video output using the version of DisplayPort Alternate mode supported by the computer.

Note that Apple Mac computers which use an Apple M1 processor can only output a single image through this dock.

Operating System	Number of Displays Supported	Single Monitor Max Resolution	Dual Monitor Max Resolution
Thunderbolt	2	7680x4320 60Hz	2x 3840x2160 60Hz
Windows	2	7680x4320 60Hz	2x 3840x2160 60Hz
Mac OS	2	7680x4320 60Hz	2x 3840x2160 60Hz
Linux	2	7680x4320 60Hz	2x 3840x2160 60Hz

When connected to a non-Thunderbolt USB-C port, the following maximum resolutions are available depending on the version of USB-C DisplayPort alternate mode supported by the computer:

Operating System	Single Monitor Max Resolution	Dual Monitor Max Resolution
Windows	7680x4320 60Hz	2x 3840x2160 60Hz
Mac OS	7680x4320 60Hz	2x 3840x2160 60Hz
Linux	7680x4320 60Hz	2x 3840x2160 60Hz

Admisión de vídeo puerto USB-C

All Thunderbolt USB-C Ports unterstützen Videoausgabe.

Many Windows and Chromebook computers which don't have Thunderbolt support support Thunderbolt also support video output, but many don't. Many Windows and Chromebook computers which don't have Thunderbolt support support Thunderbolt also support video output, but many don't. Many Windows and Chromebook computers which don't have Thunderbolt support support Thunderbolt also support video output, but many don't.

Many USB-C ports that have no labelling support video output, however USB-C ports which have a DisplayPort logo or that Thunderbolt logo printed next to them almost certainly support video output and you should look for them on the computer itself. Many USB-C ports that have no labelling support video output, however USB-C ports which have a DisplayPort logo or that Thunderbolt logo printed next to them almost certainly support video output and you should look for them on the computer itself.

If in doubt about whether a USB-C port supports video output, consult the user manual for your computer or the support information on the manufacturer's website.

The device can be used with USB-C ports which do not support video output, however you will not be able to connect the Thunderbolt ports on the rear of the dock to external monitors and show video. The other ports (Ethernet, audio and USB ports) will all be functional.

Solución de problemas

Síntoma	Solución
Video doesn't show on external display	- Ensure that the power supply is plugged into the dock and switched on at the wall - Check that the USB-C video cable is connected securely between the monitor and device and the device is securely connected to the computer - Check that the external monitor is turned on and set to the correct input - Check that your computer is detecting the external display and is set to show video on it - Check that the external monitor is connected to the dock using a Thunderbolt port or a USB-C port that supports video output using an external display
Video drops out intermittently	- Check that the USB-C video cable is connected securely between the display and device - Check that the device is securely connected to the computer - Check that the USB-C video cable being used to connect to the display is of good quality and isn't damaged
Computer doesn't start charging when the device is connected	- Ensure that the power supply is connected at the wall and turned on, and the USB-C cable supplying power is securely connected to the computer - Verify that the port on the computer is a Thunderbolt port or a USB-C port that supports charging using a USB PD power source

ALOGIC recomienda el uso de cables ALOGIC para asegurar una operación confiable y sin inconvenientes para su computadora y periféricos.

La station d'accueil ALOGIC TB430TB Thunderbolt 4 permet de connecter jusqu'à deux écrans externes et une multitude d'autres accessoires vous permettant d'utiliser votre ordinateur portable comme une station de travail de bureau.

The dock is compatible with Thunderbolt 4 and Thunderbolt 3 equipped computers as well as with standard USB-C. When used with non-Thunderbolt equipped computers the available video output resolutions may be reduced (exact capabilities depend on the specifications of the host computer).

Consignes

(Voir les images des pages précédentes)

Alimentation du socle

The dock is supplied with a mains power adapter and mains power cords for use in most regions. Connect the power cord that is suitable for your region to the power supply port on the back of the dock. The power supply port is located on the rear of the dock. The mains power cable plug will fit available mains power outlet.

The dock turns on when power is connected and the power indicator LED will illuminate to show that it is switched on and operating.

Connexion du câble à l'ordinateur portable

Connecter le câble Thunderbolt 4 inclus entre le socle et votre ordinateur.

The device is Plug-and-Play compatible and will be detected and configured automatically when your computer starts. This process will take a few seconds the first time you plug the device into your laptop. You may receive a notification that it has been installed and is ready for use.

Once the device has been recognised and set up by your computer it is ready for use and you can connect other devices as desired such as monitors, USB devices and a network cable.

When connected to a computer that supports charging using USB Power Delivery (USB PD), the dock can supply up to 95W of power to charge the computer.

Not all USB-C ports on Windows computers support video output. If connecting the dock to a non-Thunderbolt USB-C port, ensure that you connect the dock to a port that is video capable.

Refer to the USB-C Port Video Support section of this manual for further details.

Not every USB-C port on notebook computers supports charging. If connecting the dock to a non-Thunderbolt USB-C port and your computer does not support charging, the dock will not charge the computer. To determine if a port supports charging, consult the computer's manual to determine which ports accept power from USB PD power sources.

Refer to the USB-C Port Video Support section of this manual for further details.

Connecting Devices to the Dock

Connect external devices such as monitors, USB devices, Ethernet network cable and headphone/mic to the dock, as necessary. Refer to Page 2 and 3 for these instructions for an outline of the available ports and their functions.

Monitors which have a USB-C or Thunderbolt video input can be connected directly to the dock on the rear of the dock using a USB-C to USB-C cable. If connecting to a monitor with a traditional video input (DisplayPort, HDMI, DVI or VGA) you will need to use a USB-C video cable with an output that supports the connector on the monitor that you wish to connect to.

ALOGIC recommend the following products to connect the dock to monitors that do not have a USB-C video input:

A list of compatible video cables and adapters can be found at [alogic.com/tb4](https://www.alogic.com/tb4)

Tabella delle risoluzioni video supportate

The quantity and resolution of video output supported depend on whether the dock is connected to a Thunderbolt port or non-Thunderbolt USB-C port on the host computer. When connected to a USB-C port which does not support video output, the maximum resolution supported is 1080p. When connected to a Thunderbolt port or a USB-C port which supports video output using the version of DisplayPort Alternate mode supported by the computer.

Note that Apple Mac computers which use an Apple M1 processor can only output a single image through this dock.

Operating System	Number of Displays Supported	Single Monitor Max Resolution	Dual Monitor Max Resolution
Thunderbolt	2	7680x4320 60Hz	2x 3840x2160 60Hz
Windows	2	7680x4320 60Hz	2x 3840x2160 60Hz
Mac OS	2	7680x4320 60Hz	2x 3840x2160 60Hz
Linux	2	7680x4320 60Hz	2x 3840x2160 60Hz

When connected to a non-Thunderbolt USB-C port, the following maximum resolutions are available depending on the version of USB-C DisplayPort alternate mode supported by the computer:

Operating System	Single Monitor Max Resolution	Dual Monitor Max Resolution
Windows	7680x4320 60Hz	2x 3840x2160 60Hz
Mac OS	7680x4320	2x 3840x2160 60Hz