


材:200g粉 正反印刷

H20065英文明AH1V 2.0

尺寸：100x138mm

物料：0106010021939

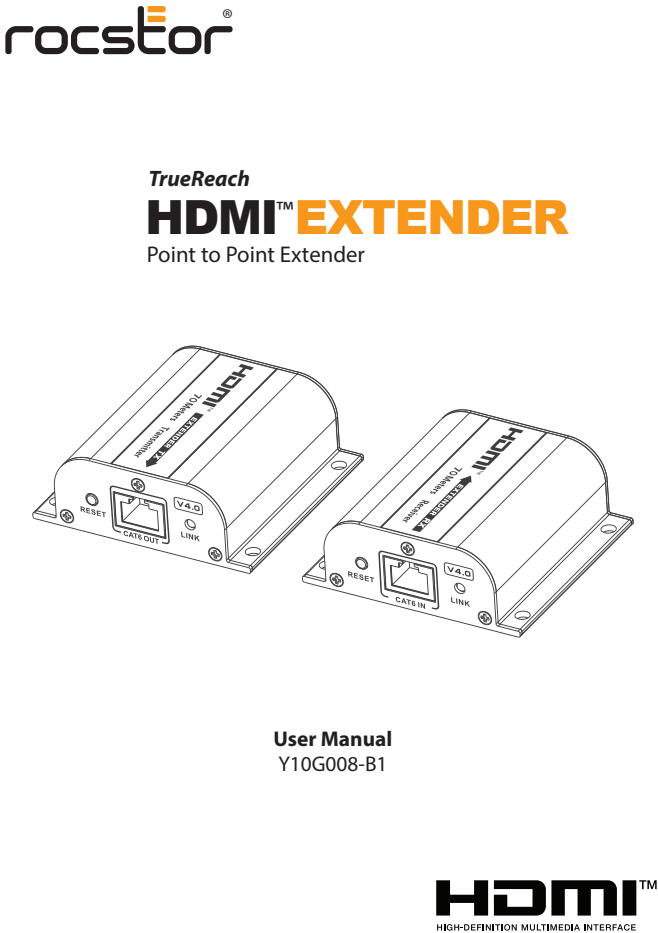

Important Safety Notice	Package Contents	Interfaces	Interfaces																								
1. Please power off the transmitter and receiver before installation. 2. Do not disassemble the devices for any repair. Do not open the devices during operations to avoid any electric shock. 3. Please turn off the power before installation. Live installation may damage the equipment. 4. Do not expose the devices to rain, moisture and liquid. 5. Use a 5V/500mA DC adapter only. Make sure the specification matches the original power adapter if using 3rd party DC adapters.	Transmitter unit x 1 pc Receiver unit x 1 pc DC 5V/500mA x 2 pcs User manual x 1 pc IR blaster extension cable x 1 pc IR receiver extension cable x 1 pc	Transmitter (TX) ① ② ③ ④ ⑤ ⑥	① ② ③ ④ ⑤ ⑥																								
Introduction	Installation Requirements	<table><tr><td>① DC 5V input</td><td>Connect to the 5V/500mA DC power adapter.</td></tr><tr><td>② HDMI input</td><td>Connect to a HDMI sourced device.</td></tr><tr><td>③ IRO ut</td><td>Connect the IR blaster extension cable, please keep the infrared transmitter as close as possible to the signal source device when using.</td></tr><tr><td>④ Reset button</td><td>Press the button to restart the device.</td></tr><tr><td>⑤ Rj45 signal output</td><td>Output modulated HDMI signal.</td></tr><tr><td>⑥ Signal Indicator</td><td>No HDMI signal is transmitted, the indicator flashes. HDMI signal is transmitted, the indicator stays on.</td></tr></table>	① DC 5V input	Connect to the 5V/500mA DC power adapter.	② HDMI input	Connect to a HDMI sourced device.	③ IRO ut	Connect the IR blaster extension cable, please keep the infrared transmitter as close as possible to the signal source device when using.	④ Reset button	Press the button to restart the device.	⑤ Rj45 signal output	Output modulated HDMI signal.	⑥ Signal Indicator	No HDMI signal is transmitted, the indicator flashes. HDMI signal is transmitted, the indicator stays on.	<table><tr><td>① DC 5V input</td><td>Connect to the 5V/500mA DC power adapter.</td></tr><tr><td>② HDMI O Uput</td><td>Connect to a HDMI display device.</td></tr><tr><td>③ IR I n</td><td>Connect the IR receiver extension cable to ensure that the remote control used is within the range of the IR receiving device.</td></tr><tr><td>④ Reset button</td><td>Press the button to restart the device.</td></tr><tr><td>⑤ Rj45 signal output</td><td>Input modulated HDMI signal.</td></tr><tr><td>⑥ Signal Indicator</td><td>No HDMI signal is transmitted, the indicator flashes. HDMI signal is transmitted, the indicator stays on.</td></tr></table>	① DC 5V input	Connect to the 5V/500mA DC power adapter.	② HDMI O Uput	Connect to a HDMI display device.	③ IR I n	Connect the IR receiver extension cable to ensure that the remote control used is within the range of the IR receiving device.	④ Reset button	Press the button to restart the device.	⑤ Rj45 signal output	Input modulated HDMI signal.	⑥ Signal Indicator	No HDMI signal is transmitted, the indicator flashes. HDMI signal is transmitted, the indicator stays on.
① DC 5V input	Connect to the 5V/500mA DC power adapter.																										
② HDMI input	Connect to a HDMI sourced device.																										
③ IRO ut	Connect the IR blaster extension cable, please keep the infrared transmitter as close as possible to the signal source device when using.																										
④ Reset button	Press the button to restart the device.																										
⑤ Rj45 signal output	Output modulated HDMI signal.																										
⑥ Signal Indicator	No HDMI signal is transmitted, the indicator flashes. HDMI signal is transmitted, the indicator stays on.																										
① DC 5V input	Connect to the 5V/500mA DC power adapter.																										
② HDMI O Uput	Connect to a HDMI display device.																										
③ IR I n	Connect the IR receiver extension cable to ensure that the remote control used is within the range of the IR receiving device.																										
④ Reset button	Press the button to restart the device.																										
⑤ Rj45 signal output	Input modulated HDMI signal.																										
⑥ Signal Indicator	No HDMI signal is transmitted, the indicator flashes. HDMI signal is transmitted, the indicator stays on.																										
1	2	3	4																								

Contact Information

Disclaimer

Installation Procedures

FAQ

Specification