

Pro Audio Solutions

Four-Channel
Stereo RCA
Line Mixer

User Manual



kopul[®]

SLM-4




Thank you for choosing Kopul.

The Kopul SLM-4 features three stereo line-level RCA inputs and an XLR mic input and mixes the signals down to a single stereo output. It's ideal for any line-level consumer devices like CD and DVD players, instruments with line-level outputs like keyboards, turntables, audio interfaces, and computers. One of the input channels offers a 1/8-inch TRS input for the option of connecting a smartphone or digital recorder. Phantom power is available for driving condenser microphones. All channels have a volume knob to set the precise volume for a perfect balance between music and vocal tracks. The mix is output to a 1/8-inch stereo jack for headphone monitoring or an RCA stereo pair for outputting to a DJ mixer or consumer stereo amplifier.

Precautions

- Please read and follow these instructions and keep this manual in a safe place.
- Keep this unit away from water and any flammable gases or liquids.
- Do not attempt to disassemble or repair the equipment—doing so will void the warranty, and Kopul will not be responsible for any damage.
- Clean the unit with only a soft, dry cloth.
- Use only the correct, recommended voltage.
- Exposure to high sound levels can cause permanent hearing loss. Avoid listening at high volumes for extended periods of time.
- Make sure all volume controls are turned down before switching on the power.
- All images are for illustrative purposes only.

Overview

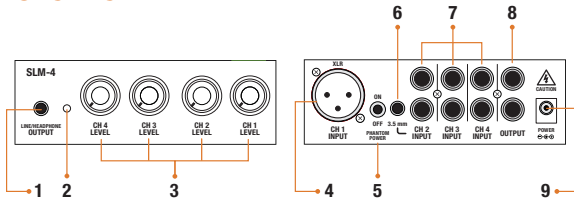

1. 1/8 in. line/headphone output
2. LED power indicator
3. Channel volume controls
4. 3-pin XLR female mic input
5. 48 V phantom power on/off switch

6. 1/8 in. stereo input
7. RCA stereo pair inputs
8. RCA stereo output
9. Power input connector

Connection Instructions

Important!

Using a Condenser Microphone


Connect the microphone and turn on the phantom power after the mic is connected.

Using a Dynamic Microphone

Turn off the phantom power before connecting the mic.


Before You Start

Make sure all volume control knobs are turned down while making connections and turning on the mixer's power.

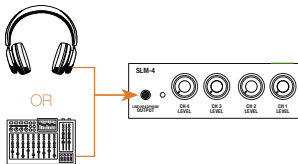

Phantom power

turn OFF / turn ON

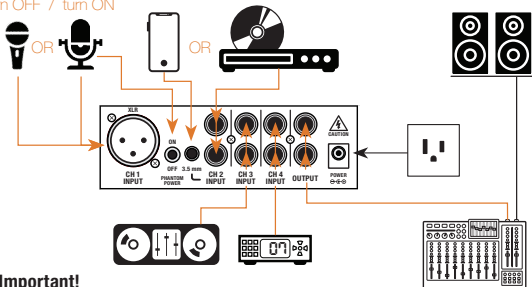

Important!

Channel 2 will accept only one input signal source. Connect a device with either a 1/8 in. stereo connector or stereo RCA connectors.

Specifications

Input Connections	Stereo RCA pairs (x3) 3-pin XLR female Stereo 1/8 in. (3.5 mm) TRS Power input	THD	<.008%
		IMD (SMPTE)	<.008%
		Phantom Power	48 V
		Input power	100 to 240 V 50/60 Hz
Output Connections	Stereo 1/8 in. (3.5 mm) (TRS) Stereo RCA pair	Current Draw	24 W
		Power Supply	12 VDC Adapter
Input Impedance (per jack)	10 k Ω	Controls	Phantom power selector
Gain	Ch. 1: 32 dB Ch. 2: 26 dB (1/8") RCA: -28 dB (RCA) Ch. 3-4: -26 dB (each)	Indicators	Channel volume (x4)
		Dimensions (H x D x W)	LED power indicator 1.5 x 2.75 x 4.75 in. (3.8 x 7 x 12.1 cm)
S/N Ratio	>90 dB	Weight	13.5 oz. (383 g)

One-Year Limited Warranty

This KOPUL product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of one (1) year from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function.

This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Kopul Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Kopul along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.kopulcables.com or call Customer Service at 212-594-2353. Product warranty provided by the Gradus Group. www.gradusgroup.com KOPUL is a registered trademark of the Gradus Group.

© 2024 Gradus Group LLC. All Rights Reserved.