




Scan this QR code for
product information, videos,
and assembly assistance.



UL CERTIFIED TILTING TV WALL MOUNT

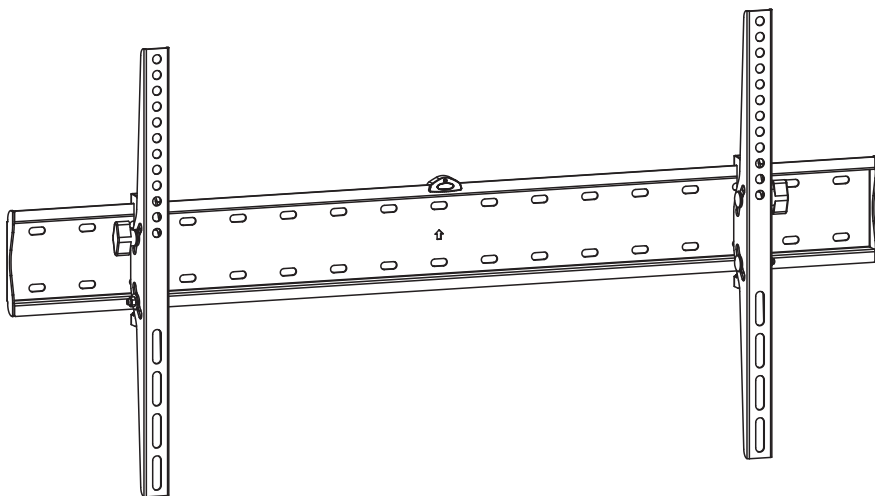

HAVE QUESTIONS?

Monday - Friday from 8:00am - 4:00pm PST



support@mount-it.com



(855) 925-5668



www.mount-it.com

Thank you for choosing Mount-It!

EN Read the entire instruction manual before you start installation and assembly. If you have any questions regarding any of the instructions or warnings, please contact Mount-It! for assistance.

CAUTION: Use with products heavier than the rated weights indicated may result in instability causing possible injury.

- Mounts must be attached as specified in assembly instructions. Improper installation may result in damage or serious personal injury.
- Safety gear and proper tools must be used. This product should only be installed by professionals.
- This product is designed to be installed on wood stud walls, solid concrete walls.
- Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
- Use the mounting screws provided and DO NOT OVER TIGHTEN mounting screws.
- This product contains small items that could be a choking hazard if swallowed. Keep these items away from children.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.

IMPORTANT: Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, telephone Mount-It! for a replacement.

MAINTENANCE: Check that the bracket is secure and safe to use at regular intervals (at least every three months).

FR Lisez entièrement le guide d'utilisateur avant de commencer l'installation et le montage. Si vous avez des questions concernant les instructions ou les avertissements, veuillez contacter votre distributeur local pour une assistance.

ATTENTION: L'utilisation de produits plus lourds que les poids nominaux indiqués peut entraîner une instabilité causant des blessures potentielles.


- Les supports doivent être joints comme spécifié dans les instructions de montage. Une mauvaise installation peut entraîner des dommages ou de graves blessures aux personnes.
- Un équipement de sécurité et les outils appropriés doivent être utilisés. Ce produit devrait être installé uniquement par des professionnels.
- Ce produit est conçu pour être installé sur des murs avec poteaux en bois, des murs en béton massif.
- Assurez-vous que la surface de soutien supporte en sécurité le poids combiné de l'équipement et de tous les matériaux et composants associés.
- Utilisez les vis de montage fournies et NE SERREZ PAS TROP les vis de montage.
- Ce produit contient de petites pièces qui peuvent causer un étouffement si elles sont avalées. Éloignez ces pièces des enfants.
- Ce produit est prévu uniquement pour une utilisation à l'intérieur. L'utilisation de ce produit à l'extérieur peut entraîner une défaillance du produit ou des blessures aux personnes.

IMPORTANT: Avant l'installation, assurez-vous que vous avez reçu toutes les pièces selon la liste de vérification des composants. Si une pièce est manquante ou endommagée, téléphonez à votre distributeur local pour qu'il la remplace.


MAINTENANCE: A intervalles réguliers (au moins tous les trois mois) vérifiez que le support est d'utilisation sûre et fiable




PACKAGE CONTENTS

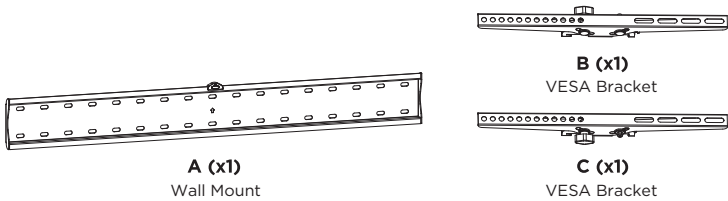

VESA MOUNTING HARDWARE



WALL MOUNTING HARDWARE




Check carefully to make sure there are no missing or defective parts. Some hardware provided may not be used. Use the correct mounting hardware suitable for your installation.

CHOKING HAZARD. Package includes small parts.
Not for children under 3 years. Adult supervision is required.

Missing Parts? Call us at (855) 925-5668 and we will ship replacement parts free of charge.

DIMENSIONS & WEIGHT CAPACITY

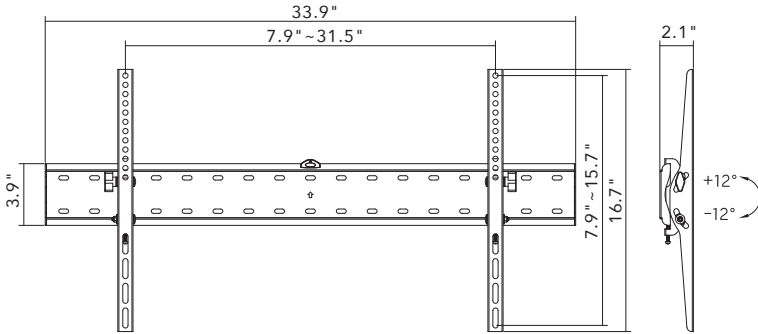


Rated weight capacity is 110lbs for the mount.

Caution:
Ensure all mounting surfaces are capable of holding the weight of your mount.
DO NOT EXCEED MAXIMUM LISTED WEIGHT CAPACITY.
SERIOUS INJURY OR PROPERTY DAMAGE MAY OCCUR!



Step 1

A. Wood Stud Installation Option


- Use a stud finder to locate the center of the studs and hold Wall Mount(#A) to the wall in the desired mounting location. Note: 3 studs are required with 16" spacing from the center of each stud, and a maximum drywall thickness of 3/8".
- Use a bubble level to ensure that the mount is level.
- Mark the center of the studs through the mount as shown.

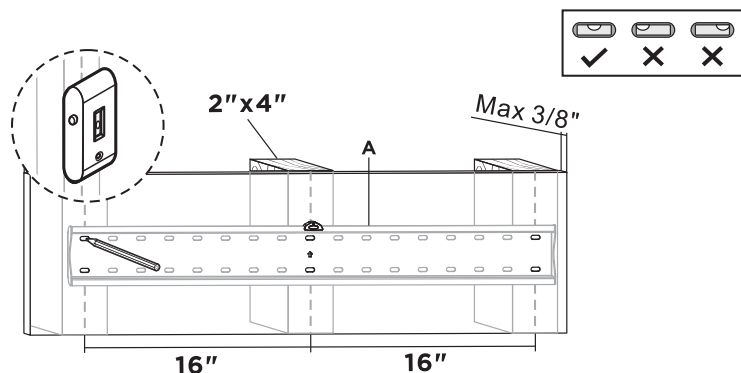

- Remove the Mount from the wall and drill holes in the marked locations using a 3/16" drill bit (4.5mm) to a depth of 2.2" (55mm).

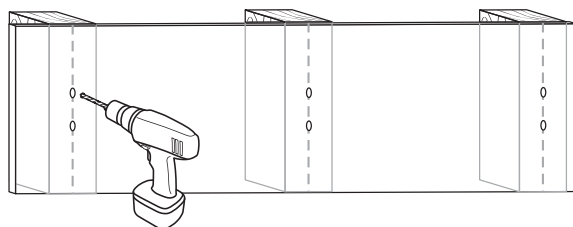


- Hold the Wall Mount (#A) to the wall over the holes, check the level once again, and install the 6 Lag Screws (#W-A) and Washers (#W-C) then tighten until secure.

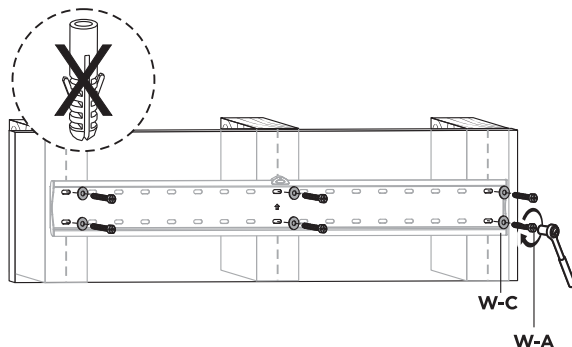



B. Concrete/Brick Installation Option

- Hold the Wall Mount(#A) to the wall in the desired mounting location. Note: A minimum wall thickness of 5.5" is required.
- Use a bubble level to ensure that the mount is level.
- Mark the center of the holes through the mount in the locations shown.

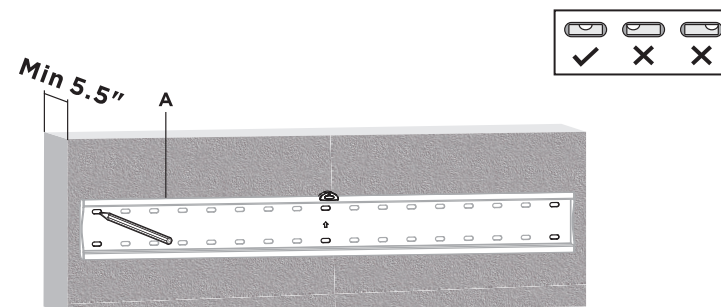


- Remove the Mount from the wall and drill holes in the 6 marked locations using a 3/8" drill bit (10mm) to a depth of 2.4" (60mm).

Note: Do not drill mounting holes into mortar (such as between bricks or stones) only drill and install into solid stone or concrete surfaces.

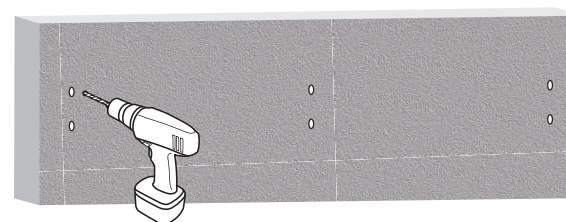


- Clear dust or debris from the holes and insert the Concrete Anchors (#W-B) fully until flush with the wall. Hold the Wall Mount (#A) to the wall over the holes, check the level once again, and install the 6 Lag Screws (#W-A) and Washers (#W-C) then tighten until secure.

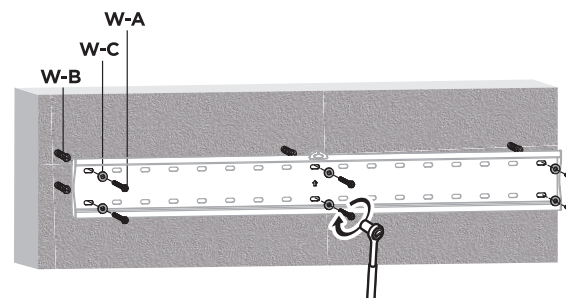

Step 2

Attaching the VESA Brackets to the TV


- Select the appropriate size mounting bolt (Select one size #M-A or M-B) and washer (#M-C) for your display's mounting holes and verify the length of the VESA bolt is not too long. If you are unsure of the correct bolt size for your display refer to your display's user manual or contact the display's manufacturer for sizing information. If necessary, use the included spacers (#M-D) between the mount and the screen as shown above to adjust the length of the mounting bolt.
- Attach the Right and Left VESA Brackets (#B, C) to the TV as shown using the selected bolts. Ensure that the tilt adjustment knob on the side of each VESA Bracket is facing toward the outside edge of the TV or you will be unable to properly adjust the tilt of the screen.

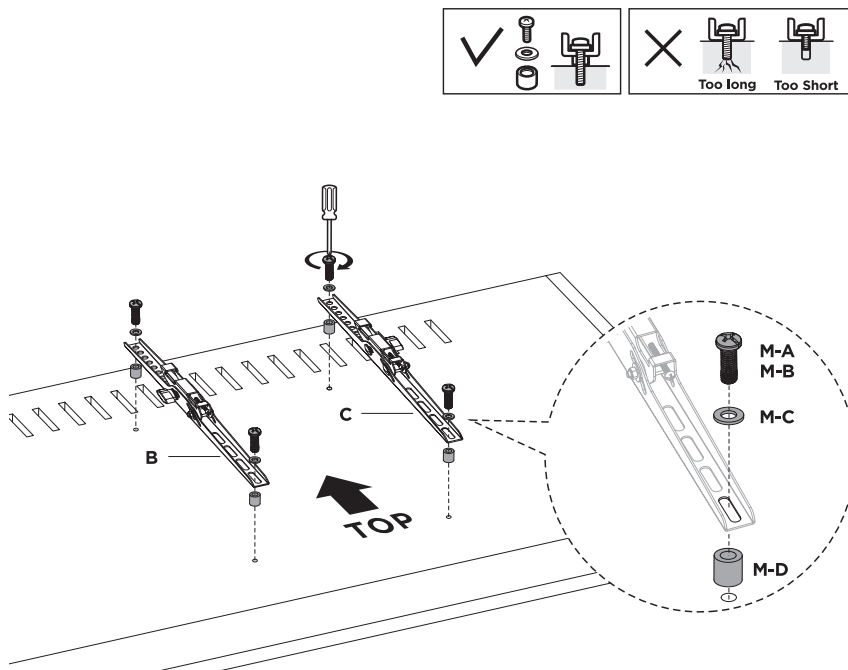

Step 3

Hang the TV on the Wall Mount


- Loosen the security bolt on the bottom of both VESA Brackets until only 0.2" of the top of the bolt is protruding out of the top.
- It is recommended that you use the assistance of a second person for this step. Hang the TV on the wall mount as shown so that the top of the VESA brackets hook onto the top of the wall mount, then lower the bottom end of the TV down into place.
- Tighten the security bolt back down until it is past the lip of the wall mount, and the end of the bolt is almost touching the upper edge of the mount. This security bolt prevents the mount from being accidentally lifted away from the wall mount.

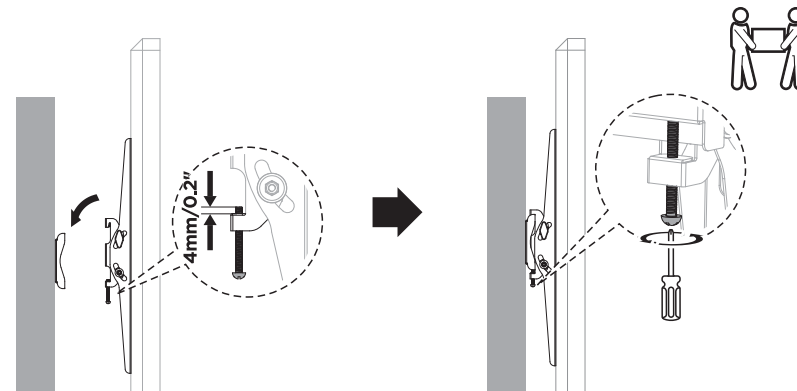

Step 4

Tilt Adjustment

- To adjust the viewing angle of the screen, loosen the tilt adjustment knobs indicated here, tilt the screen to the desired angle, then tighten the knobs back in place.

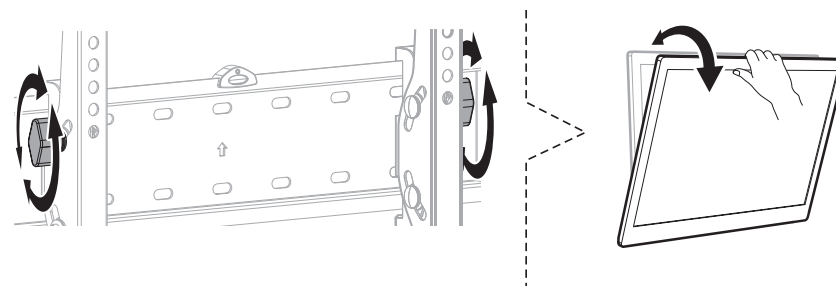

Visit us at **www.mount-it.com** for product registration and warranty information.

Our US based customer service team is standing by to answer any questions you have about your Mount-It! product.

Available by phone **Monday - Friday from 8:00am to 4:00pm** PST.

Chat live with an agent on our website!



support@mount-it.com



(855) 925-5668



www.mount-it.com