

FUJIFILM

FUJINON

FUJINON TV LENS

富士能电视镜头

UA14x4.5BERD-S6B

UA18x5.5BERD-S6

UA24x7.8BERD-S6

UA18x7.6BERD-S6


UA23x7.6BERD-S6

取扱説明書
Operation Manual
使用手册

富士フイルム株式会社
FUJIFILM Corporation
富士胶片株式会社

ENGLISH VERSION

- ◆ This operation manual is composed of the Japanese version, English version, Chinese version, and Technocal Drawings.

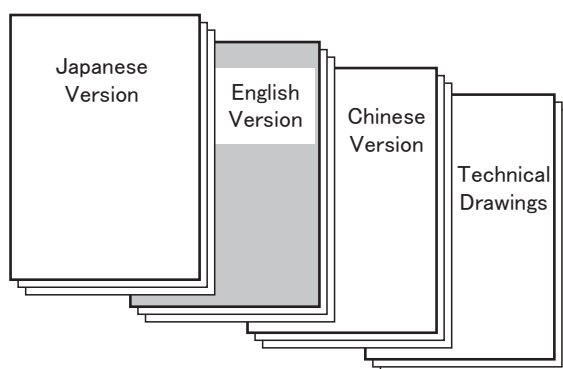

FCC REGULATIONS

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION : Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Canadian Radio Interference Regulation

CAN ICES-3(B) / NMB-3(B)

CAUTION : This Class B digital apparatus complies with Canadian ICES-003.

Disposal of Electrical and Electronic Equipment in Private

In the European Union, Norway, Iceland and Liechtenstein:

This symbol on the product, or in the manual, and/or on its packaging indicates that this product shall not be treated as household waste. Instead it should be taken to an applicable collection point for the recycling of electrical and electronic equipment.

By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and human health, which could otherwise be caused by inappropriate waste handling of this product.



FOR YOUR SAFETY

This content explains important notices for all the users to use this product safely.

Read the content carefully before using, and follow the instructions.

The following signs of ⚠ WARNING and ⚠ CAUTION show :

⚠ **WARNING** Indicates the possibility of causing death or serious injury when misused.

⚠ **CAUTION** Indicates the possibility of causing injury or substantial damage when misused.

⚠ WARNING

- ◆ Do not moisten inside of the appliances. It may cause fire or electric shock.
If the incident occurs, shut off the power supplied to the lens immediately.
- ◆ Be sure to attach all the parts securely. Dropping any parts from a height may cause severe accidents.
- ◆ Do not look at any sorts of strong illuminant such as the sun through the lens. Eyes could be harmed.

⚠ CAUTION

- ◆ Take care when carrying the lens. Dropping the lens while carrying may cause injury.
- ◆ Be sure to confirm that the camera to be used with the lens system (lens and accessories) is able to supply sufficient electric power to the lens system. If not, the lens system may not work normally and the camera will be damaged. The values of the power consumption of the lens and the accessories are described in “Specifications” section of their operation manuals.
- ◆ Before supplying the power to the lens, make sure all the parts are connected correctly.
- ◆ When you change the connection of the lens system, be sure to turn OFF the system. Plugging or unplugging an accessory while the system is turned ON may cause a malfunction or trouble.
- ◆ In order to install or release a cable, be sure to hold the joint part. Do not damage the cable by gripping. It may cause fire or electric shock.
- ◆ If any sorts of incidents such as unusual smoke, noise, smell or obstacles are found, shut off the power supplied to the lens and detach the lens from the camera immediately. Please notify the sales agent from which you purchased the product.
- ◆ Do not remodel the instrument: it may impair the functions of product or cause electric shock.

NOTICE

- ◆ Lens and its accessories are extremely precise instrument, then be sure not to apply the strong impacts to them. If the lens is of a type in which the rear lens protrudes from the flange surface of the lens mount, be sure not to apply impact to the lens part when installing or releasing.
- ◆ There may be a case that the glasses of the lens mist when the lens is carried from a cool place to a place of high temperature and high humidity. To avoid a mist on the glasses, before moving the lens, let the lens adjust to the ambient temperature of the place where the lens will be used.
- ◆ Be sure not to apply impact to the front part of the lens when operating the camera.
- ◆ Put the cap on the lens while the camera is not used.
- ◆ If an accessory to be attached to the lens is equipped with a mechanical drive relaying part, before attaching it, check the joint part and get rid of all obstacles. If there are any unusual conditions, please contact the sales agent from which you purchased the product.
- ◆ When the lens is used in the weather of fog, raining, or snowing, cover up the lens to prevent it from the water.
- ◆ To minimize the impact to the lens in transportation, set the zoom to the wide end and the focus to the infinity side end before releasing the lens from the camera.

MEMO

TABLE OF CONTENTS


1	Table of contents.....	1
2	General Description	2
3	Installation onto Camera.....	2
4	Adjustment of Flange Focal Length.....	3
5	Iris Operation.....	4
6	Focus Operation.....	5
7	Zoom Operation.....	6
	7.1 Manual Operation.....	6
	7.2 Operation by Zoom Seesaw Control Lever.....	7
	7.3 QuikZoom Operation.....	7
	7.4 Auto Cruising Zoom Operation.....	8
	7.5 Zoom Limit Operation.....	9
8	Macro Operation.....	11
9	Other Functions	12
10	About Function & Mode Select Switches.....	13
11	Iris Adjustment.....	17
12	Detaching/Attaching Lens Hood.....	18
13	Maintenance	19
14	Pin Assignment of Connector.....	20
15	Optional Accessories	21
16	Specifications	23
17	Technial Drawings.....	27
	Names of parts	
	Outline Drawings	
	Fig.1 UA14 X 4.5BERD-S6B	
	Fig.2 UA18 X 5.5BERD-S6	
	Fig.3 UA24 X 7.8BERD-S6	
	Fig.4 UA18 X 7.6BERD-S6	
	Fig.5 UA23 X 7.6BERD-S6	
	Simens star chart	

Note. The products shown in the illustrations in this manual may differ from their actual shapes.

2. GENERAL DESCRIPTION

This lens is a bayonet mount type zoom lens developed for a color TV Camera.

3. INSTALLATION ONTO CAMERA

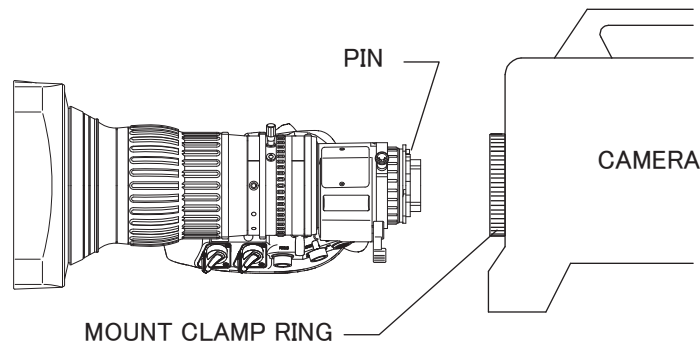

■ INSTALLATION ONTO CAMERA

Note. Prior to installation of the lens, turn off the power of the camera.

⚠ WARNING Be sure to attach all the parts securely. Dropping any parts from a height may cause severe accidents.

- Take the rear lens cap off.
- Rotate the mount clamp ring on the camera fully counterclockwise.
- Fit the mounting surface of the lens to that of the camera aligning the pin on the lens with the slot in the camera.
- Rotate the mount clamp ring fully clockwise.
- Connect the cable of the lens to the connector, provided for the lens, on the camera.

Note. Make sure to adjust the flange focal length when installing the lens on a camera for the first time or installing it on another camera. (refer to the next page for details)


4. ADJUSTMENT OF FLANGE FOCAL LENGTH

The flange focal length is the distance from the flange (mounting surface) of a lens to the focal plane. If the focal plane of the lens does not coincide with the image plane of the camera, the object will be out of focus during a zoom operation. To prevent this from happening, the adjustment of the flange focal length is required. Make sure to carry out the adjustment when installing the lens to a camera for the first time or installing it to another camera.

4.1 CONDITIONS OF OBJECT AND DIAPHRAGM

- 1.Object : Use the Siemens Star (the chart made up of radial black and white lines) at the end of this manual as an object.
- 2.Distance of object : About 3 meters
- 3.Diaphragm : Open or as near to open as possible.

Note: The depth of field decreases by opening the aperture of the lens, and it becomes possible to focus on an object more precisely. To precisely adjust the flange focal length, carefully adjust the focus as much as possible.

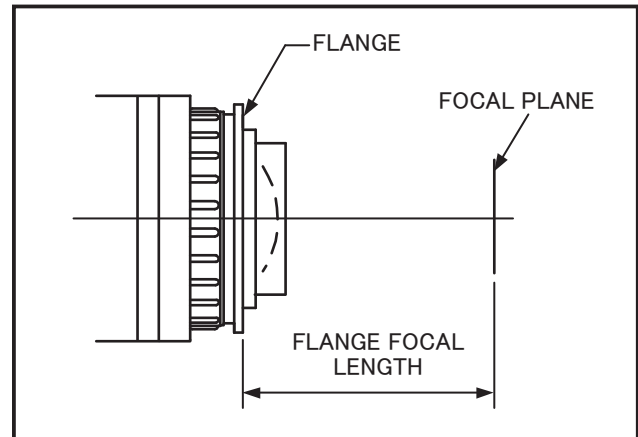


4.2 ADJUSTMENT

After installing the lens to the camera and turning it ON, perform adjustment by watching the monitor of the camera. At this time, connect the lens cable to the lens connector on the camera.


For the operation of focusing and zooming, refer to “Focus Operation” and “Zoom Operation” (pages 6 and 7).

Note. Before adjusting the flange focal length, set the zoom limit ON/OFF select switch to “OFF.” (refer to page 13)

- a. Loosen the F.f locking knob by rotating it counterclockwise.
- b. Operate the zoom to set it to the wide end.
- c. Rotate the F.f adjusting ring using the F.f locking knob to focus on the Siemens Star located approximately 3 meters away. The position where the radial black and white lines become sharpest is the optimum focus position.
- d. Operate the zoom to set it to the telephoto end.
- e. Operate the focus to bring the object into focus.
- f. Operate the zoom to set it to the wide end again, and check that the optimum focus position adjusted in step ‘c’ is kept.
- g. To adjust precisely, repeat the above steps ‘b’ through ‘f’ several times.
(If the most optimum focus position usually holds in all zoom areas, the flange focal length is adjusted precisely. If it is not focused, the flange focal length is not adjusted sufficiently.
In this case, start adjusting again from step ‘b.’)
- h. Finally tighten the F.f locking knob firmly.

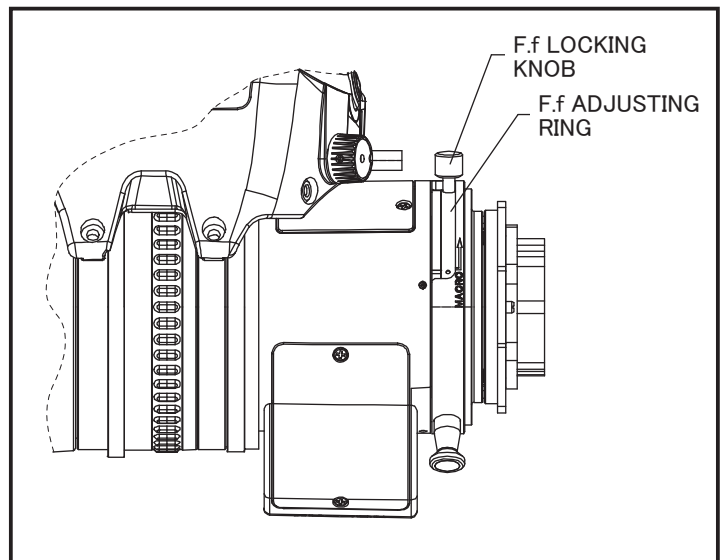

5. IRIS OPERATION

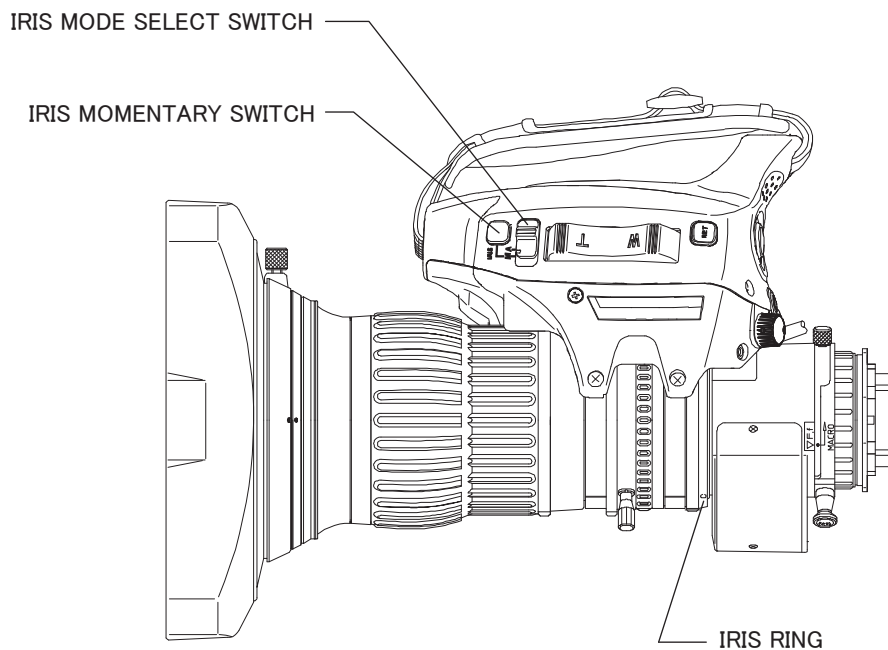

There are two iris operation modes: auto iris mode and manual mode.
For the operating instruction in each mode, refer to the description on each mode.

5.1 AUTO IRIS MODE

Set the iris mode select switch to “A.”

The iris of the lens will automatically be adjusted responding to the object brightness.

5.2 MANUAL MODE

- a. Set the iris mode select switch to “M.”
- b. Rotate the iris ring by hand to adjust the iris.


From the camera side, clockwise rotation of the ring causes the iris to move toward the closed side and counterclockwise rotation toward the open side.

Note 1. Although the iris operation mode is in Manual, the iris is adjusted automatically while the iris momentary switch is being pressed.

Note 2. The positions of the auto iris mode and the manual mode in the iris mode select switch can be interchanged by setting the iris A-M position change switch (refer to page 14) to ON. When the positions are interchanged, apply the mode indication label, enclosed with the lens, onto the mode indication part of the lens so as not to cause confusion.

Note 3. Do not operate the iris ring manually when the built-in motor is performing the servo operation to turn the iris. Applying excessive force to the iris ring while the iris mode select switch is set to “A” or the auto iris mode is activated by pressing the iris momentary switch may cause a malfunction.

6. FOCUS OPERATION

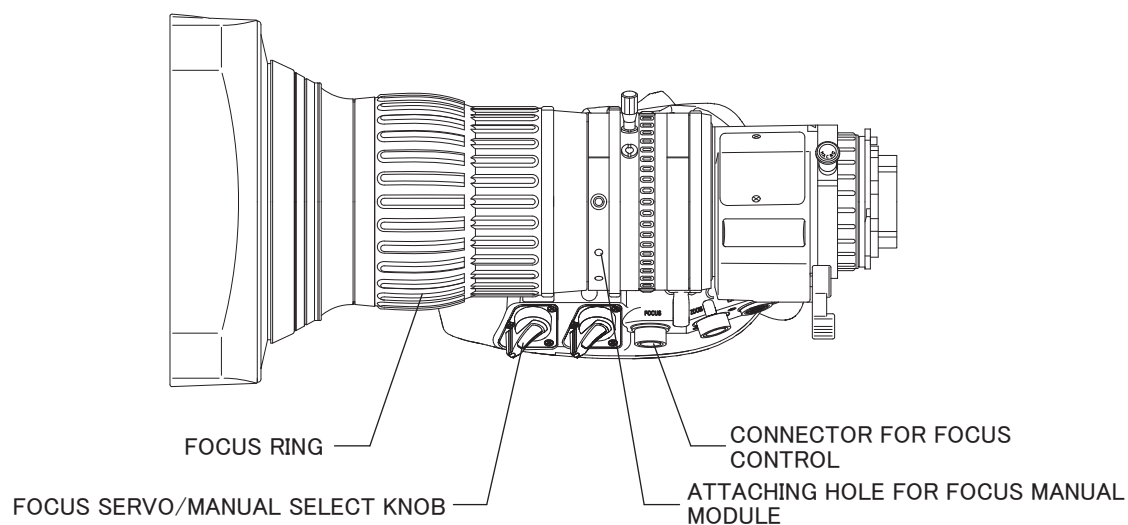

Focus operation is an operation to focus on the subject.

Focusing can be done by directly rotating the focus ring by hand.

Focusing can be done by directly rotating the focus ring by hand. Rotate the focus ring clockwise from the camera side to focus on an object on the near side.


The remote control operation is also available with optional accessories.

Set the focus servo/manual select knob to “S,” when using a servo control accessory.

Note . When the focus servo/manual select knob is set to “S,” do not attempt to forcibly operate the focus ring or focus grip. Applying excessive force to the focus ring or focus grip while the servo operation is selected may cause a malfunction.

MEMO

7. ZOOM OPERATION

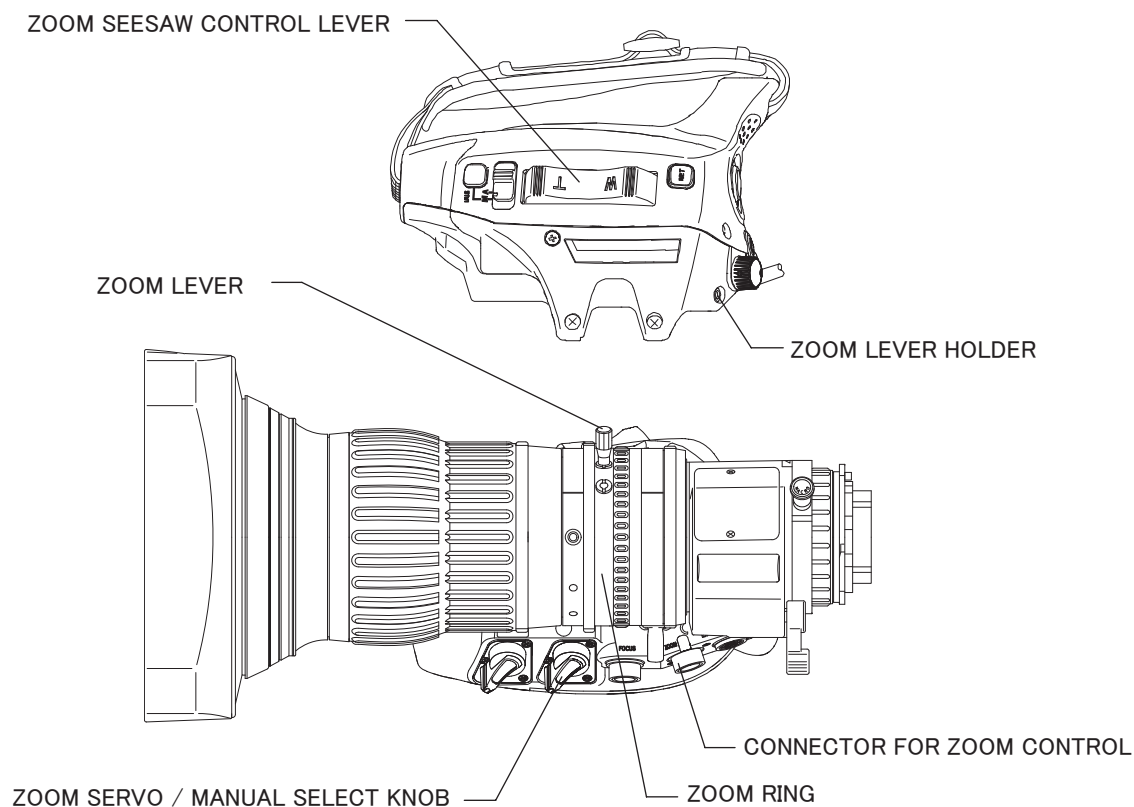

The zoom operation is an operation that continuously changes the angle of view from wide angle to telephoto. The zoom can be operated in the following five operation modes.

	Page
7.1 Manual Operation	6
7.2 Operation by Zoom Seesaw Control Lever	7
7.3 QuikZoom Operation	7
7.4 Auto Cruising Zoom Operation	8
7.5 Zoom Limit Operation	9

For the operating instruction in each mode, refer to the description on each mode. The remote control operation is also available with optional accessories.

7.1 Manual Operation

- Set the zoom servo/manual select knob to “M.”
- Rotate the zoom ring directly or using the zoom lever.
Clockwise rotation of the zoom ring, viewed from the camera side, moves the zoom to the wide side, and counterclockwise rotation to the tele side.
(When rotating the zoom ring directly, it is recommended to remove the zoom lever for smooth operation. If you removed the zoom lever, install it on the zoom lever holder so as not to lose it.)

Note . When performing the zoom operation using the manual operation mode, be sure to set the zoom servo/manual select knob to “M.” Forcibly performing manual operation while the zoom servo/manual select knob is set to “S” may cause a malfunction.

7.2 Operation by Zoom Seesaw Control Lever

- a. Zoom servo/manual select knob to “S.”


Press T-side of the lever to zoom to the tele side, and the W-side to zoom to the wide side.

For the speed control, adjust the strength to press the lever. Pressing the lever deeply makes the zoom speed faster, and shallowly makes slower.

Note. If the zoom limit function is used, the zoom will stop at the zoom limit positions. In this case, the zoom may not reach the tele end or the wide end.

< Control of Zoom Maximum Speed >

By means of the zoom maximum speed control knob (see the next page), the zoom maximum speed can be changed in seven steps in servo operation. Rotate the knob clockwise to increase the speed.

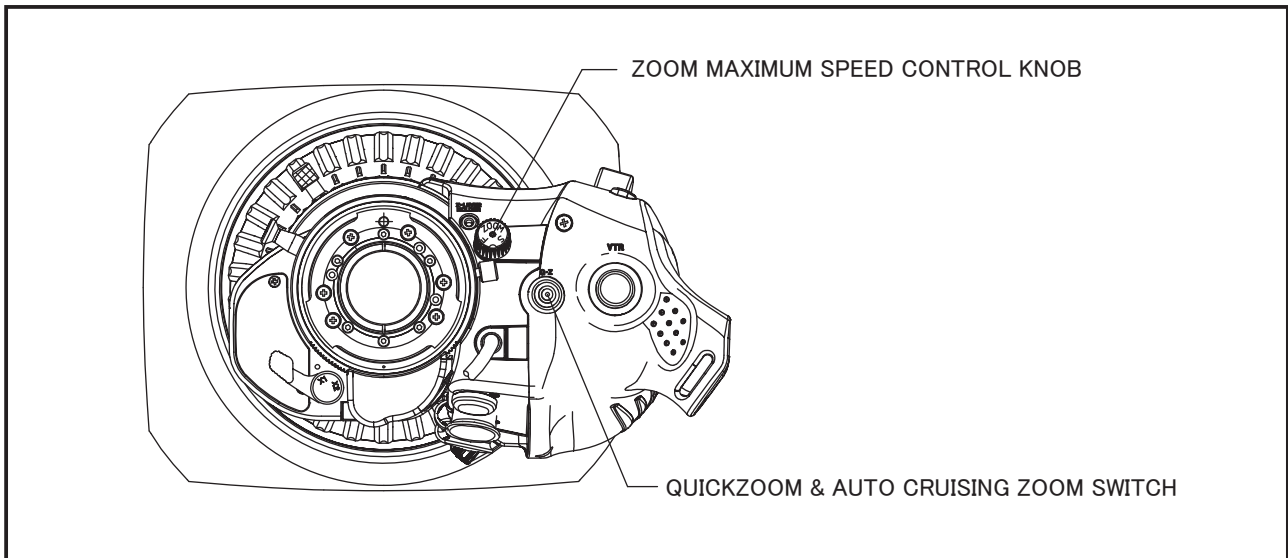

7.3 QuickZoom Operation

In quickzoom operation, pressing a switch moves the zoom to the tele end quickly.

The operator can use this function in such occasions listed below.

- When rapid zooming to the tele end is required to focus on the object precisely.
- To confirm, in a moment, the composition of the image in the extreme closeup shot.

Note. If the zoom limit function is used, the zoom will stop at the zoom limit position. In this case, the zoom may not reach the tele end.

Operation

- Set the Zoom servo/manual select knob to “S.”
- Keep pressing the quickzoom & auto cruising zoom switch until the zoom reaches the tele end.
- While pressing the quickzoom & auto cruising zoom switch, perform precise focusing or confirm the composition of the image in the extreme closeup shot.
- Release the quickzoom & auto cruising zoom switch.
 - The zoom will move to its former position quickly.(If you press the quickzoom & auto cruising zoom switch again before the zoom returns to its former position, the quickzoom movement restarts. After this operation, if the switch is released, the zoom will move to its former position quickly.)

Note 1. By setting an appropriate switch in the area of “Function & Mode Select Switches” (refer to page 13), the return switch and the VTR switch can be used also as a quickzoom & auto cruising zoom switch.


Note 2. In quickzoom operation, the zoom moves at the maximum speed irrespective of the setting position of the zoom maximum speed control knob.

Note 3. If you press the quickzoom & auto cruising zoom switch while pressing the zoom seesaw control lever, the zoom moves in auto cruising zoom operation, not in quickzoom operation.

7.4 Auto Cruising Zoom Operation

In auto cruising zoom operation, the zoom moves to the tele end or the wide end at a constant speed. This function is effective when a constant slow zoom speed is required across the zooming range.

Note. If the zoom limit function is used, the zoom will stop at the zoom limit positions. In this case, the zoom may not reach the tele end or the wide end.

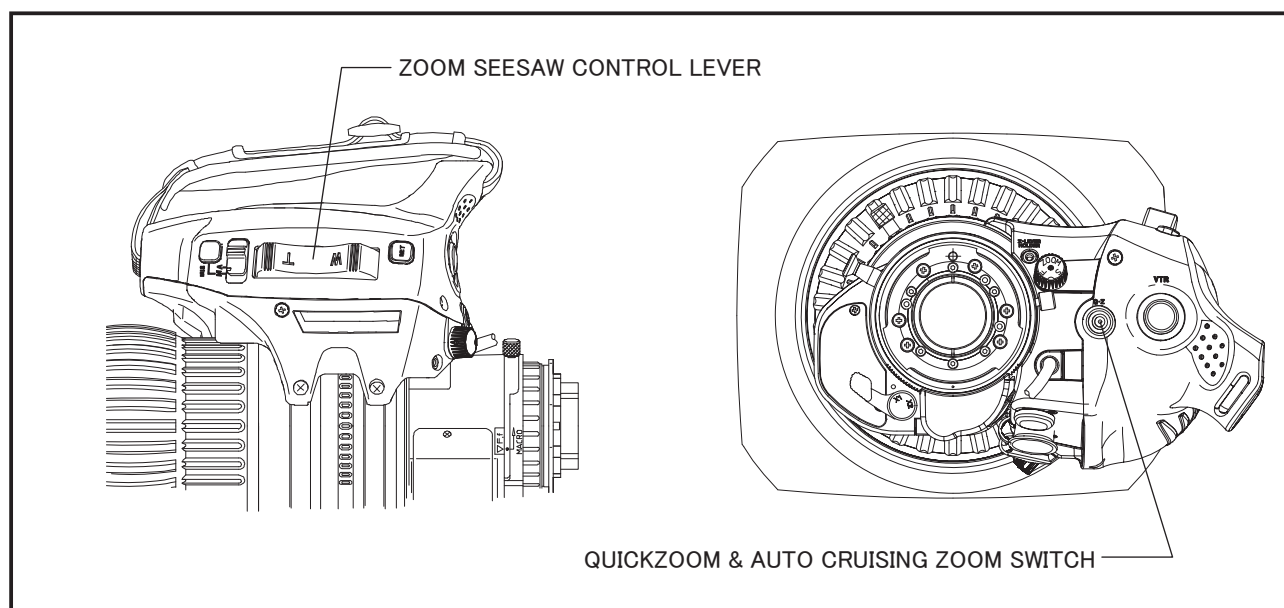

Operation

- a. Set the quickframe/manual zoom select knob to “ON.”
- b. Press the zoom seesaw control lever and adjust the zoom speed.
- c. While pressing the zoom seesaw control lever, press the quickzoom & auto crusing zoom switch.
 - The auto cruising zoom function will work.
- d. Release your hand from the zoom seesaw control lever.
 - The zoom will move to the tele end or the wide end at a constant speed that is determined when the quickzoom & auto cruising zoom switch is pressed.

Note. By setting an appropriate switch in the area of “Function & Mode Select Switches” (refer to page 19), the return switch and the VTR switch can be used also as a quickzoom & auto cruising zoom switch.

Releasing

There are three ways to release the auto cruising zoom operation mode.


1. Press the zoom seesaw control lever on the side of the direction of the zoom movement.
 - When the amount of displacement of the zoom seesaw control lever exceeds that determined when the auto cruising zoom operation is set, the auto cruising zoom operation mode will be released. After released, the zoom will move continuously toward the same direction as moved before releasing. (In this way, the auto cruising zoom operation mode can be released maintaining the smooth zoom movement.)
2. Press the zoom seesaw control lever on the reverse side of the direction of the zoom movement.
 - The auto cruising zoom operation mode will be released immediately, and the zoom will move toward the reverse direction.
3. Press the quickzoom & auto cruising zoom switch.
 - The auto cruising zoom operation mode will be released immediately, and the zoom will stop.

7.5 Zoom Limit Operation

The zoom limit function can be used in the servo operation mode.

(The setting of the zoom limit positions can be set also in the manual operation mode.)


By using this function, the zoom movement toward both the tele side and the wide side can be confined; therefore, zooming can be done within the desired shot angles.

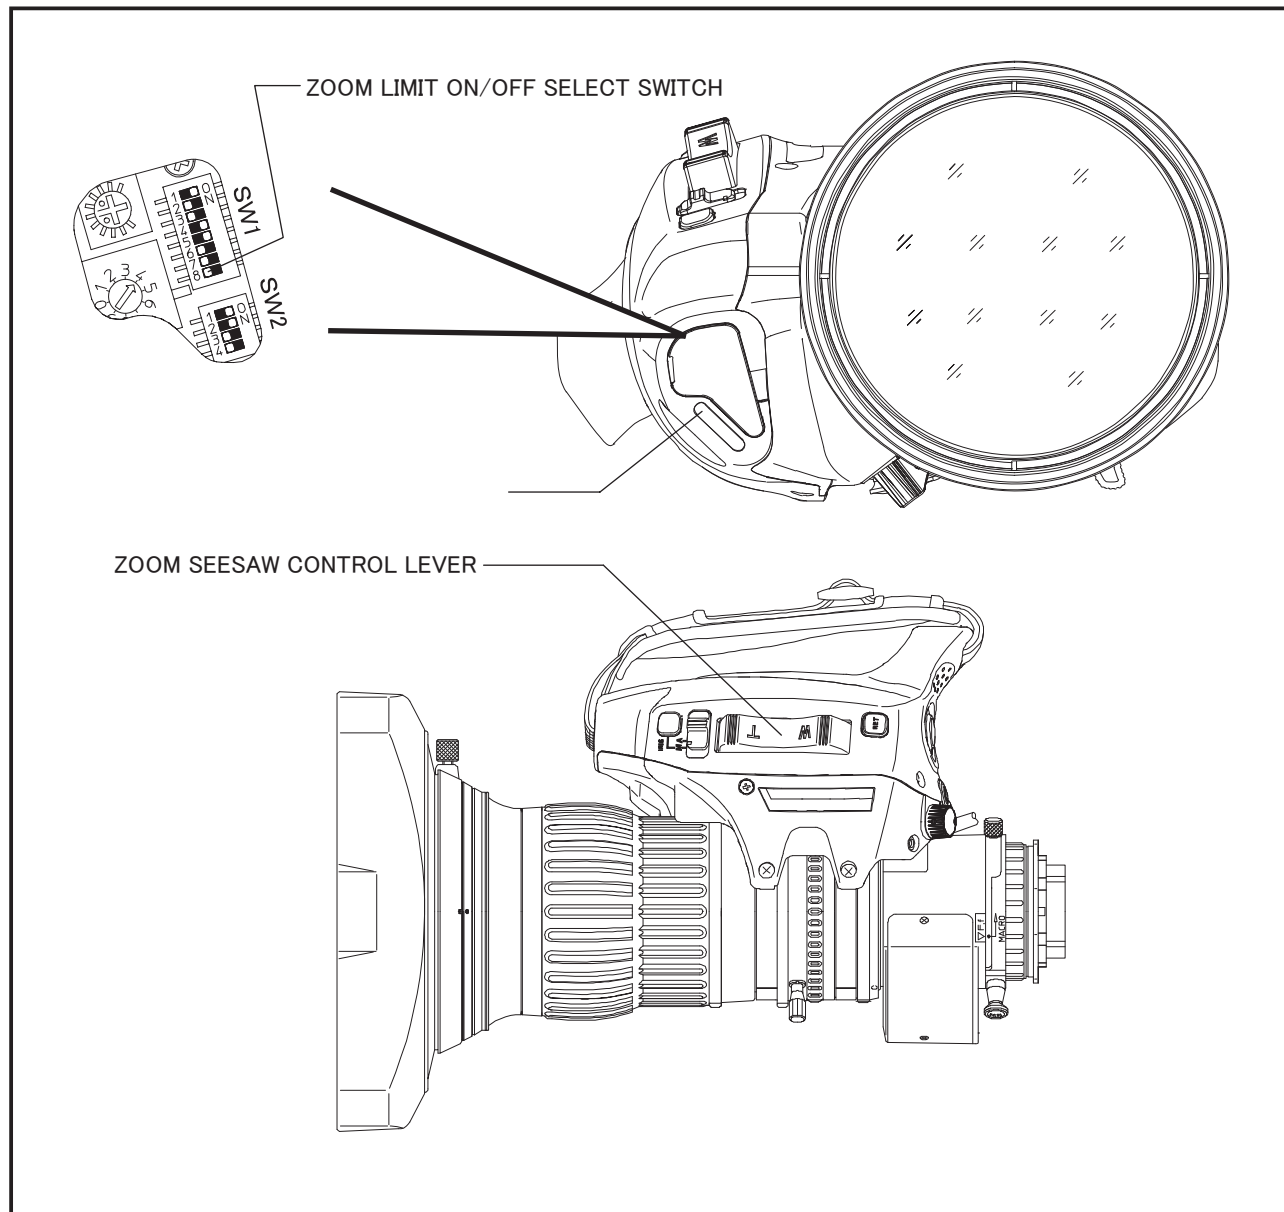

MEMO

7.5.1 Setting of Zoom Limit Positions

- a. If the zoom limit ON/OFF switch (SW1-8) is set to “OFF,” change it to “ON” position.
- b. Set the zoom servo/manual select knob to “M.”
- c. Move the zoom manually, and stop it at the position desired as a tele side zoom limit position.
- d. Press “T” side of the zoom seesaw control lever and the quickzoom & auto cruising zoom switch simultaneously for more than 3 seconds. (refer to Note 4)
 - The tele side zoom limit position will be set.
- e. Move the zoom manually, and stop it at the position desired as a wide side zoom limit position.
- f. Press “W” side of the zoom seesaw control lever and the quickzoom & auto cruising zoom switch simultaneously for more than 3 seconds. (refer to Note 4)
 - The wide side zoom limit position will be set.

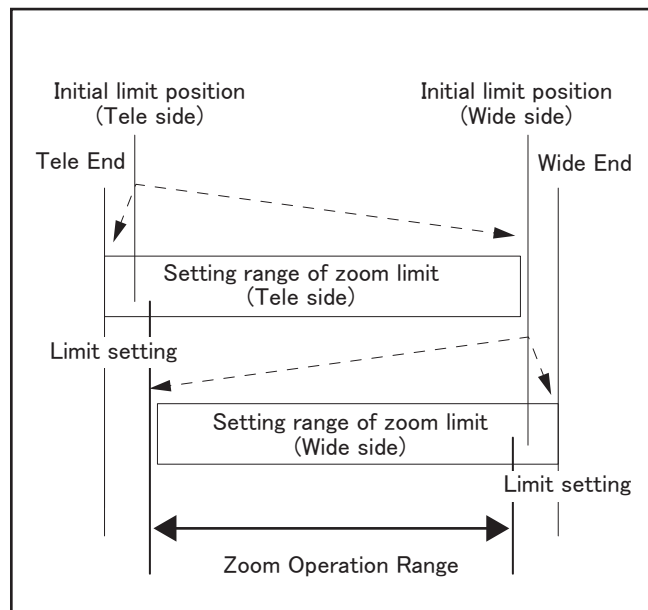

Note 1. Before shipment at the factory, the zoom limit positions were set at the tele end and the wide end respectively.

Note 2. Either side of the zoom limit positions can be set at first.

Note 3. The wide side zoom-limit position cannot be set to the same position as the tele side zoom-limit position, or further toward the tele end than the tele side zoom-limit position. Tele End Zoom Operation Range This is the same with the tele side.

Note 4. The zoom limit positions will be held even if the zoom limit ON/OFF select switch is set to “OFF” or the power to the lens is turned “OFF.”

Note 5. When the zoom limit position is set, the LED located inside the cover will be lit. The LED will go out when the zoom seesaw control lever or the quickzoom & auto cruising zoom switch is released.

7.5.2 Zoom Limit Operation


- a. If the zoom servo/manual select knob is set to “M,” change it to “S.”
- b. If the zoom limit ON/OFF select switch is set to “OFF,” change it to “ON.”
- c. By means of the zoom seesaw control lever, operate the zoom.
 - While pressing the “T” side of the lever, the zoom moves in the tele direction and stops at the tele limit position.
 - While pressing the “W” side of the lever, the zoom moves in the wide direction and stops at the wide limit position.

Note 1. Before performing a zoom limit operation, if the zoom position is not within the range of the tele side and the wide side zoom limit positions, when the seesaw control lever is operated, the zoom will move only toward the zoom limit positions, not toward the opposite side of them.

Note 2. If a zoom rate demand unit that has the zoom limit function is connected to the lens, the validity of the zoom limit function differs depending on the type (digital or analog) of the zoom rate demand unit.

- With a digital zoom rate demand unit, the zoom limit function of the zoom rate demand unit will be valid. The zoom limit function of the lens will not work.
- With an analog zoom rate demand unit, the zoom limit functions of both the zoom rate demand unit and the lens will be valid. To avoid a confusion of the zoom limit positions, turn off the zoom limit function of one of them.

8. MACRO OPERATION

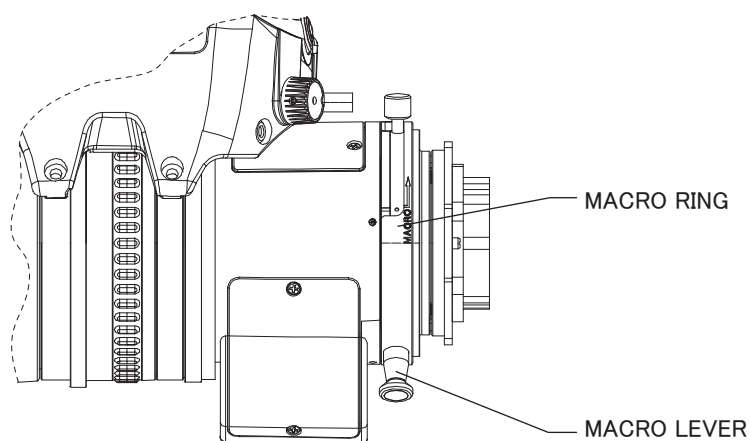

Carry out the following steps for the macro operation (taking a closeup shot).

9.1 Operation

- Rotate the focus ring fully toward the infinity side.
- While pulling the macro lever, rotate the macro ring clockwise as far as it goes.
- Focus the lens by controlling the zoom.

Note 1. Before macro operation, set the zoom limit ON/OFF select switch to “OFF.”

Note 2. It is also possible to shoot an object while the macro ring is in an intermediate position.

In this case, the values of the M.O.D. (Minimum Object Distance) and the object area at M.O.D. are those of between a normal and a closeup shot.

9.2 PROCEDURE TO CANCEL

Rotate the macro ring in the opposite direction of the arrow until the macro lever automatically returns to its original position.

MEMO

9. OTHER FUNCTIONS

9.1 Extender Select Lever


To use the built-in extender, rotate the extender select lever to align the letters “× 2” with the index mark.

9.2 VTR Switch

Operation of this switch starts or stops the VTR linked to the camera.

Note 1. The VTR switch operates only when the camera supports the function of the switch.

Note 2. If the setting of the function & mode select switches is properly arranged, this switch works as a quickzoom switch or a quickzoom & auto cruising zoom switch. (refer to page 13)

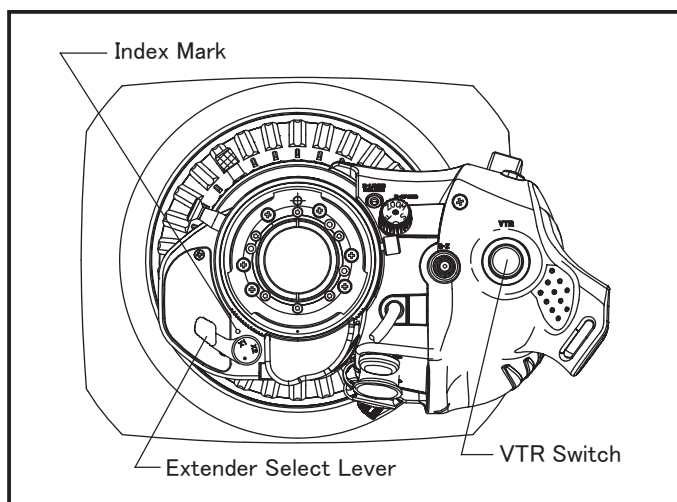


9.3 Return Switch

This is a switch to display the playback image on the camera viewfinder.

While pressing this switch, the return video picture can be seen through the viewfinder of the camera.

Note 1. The Return switch operates only when the camera supports the function of the switch.


Note 2. If the setting of the function & mode select switches is properly arranged, this switch works as a quickzoom switch or a quickzoom & auto cruising zoom switch. (refer to page 13)

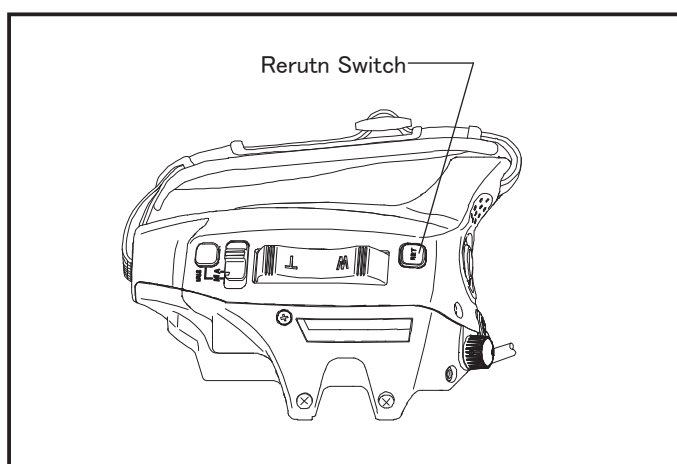

9.4 Connector for Expansion

This connector can be used in two applications listed below.

- (1) To control the lens from a personal computer.
 - (2) To use the lens in a virtual studio system.
- (This connector outputs encoder signals.)

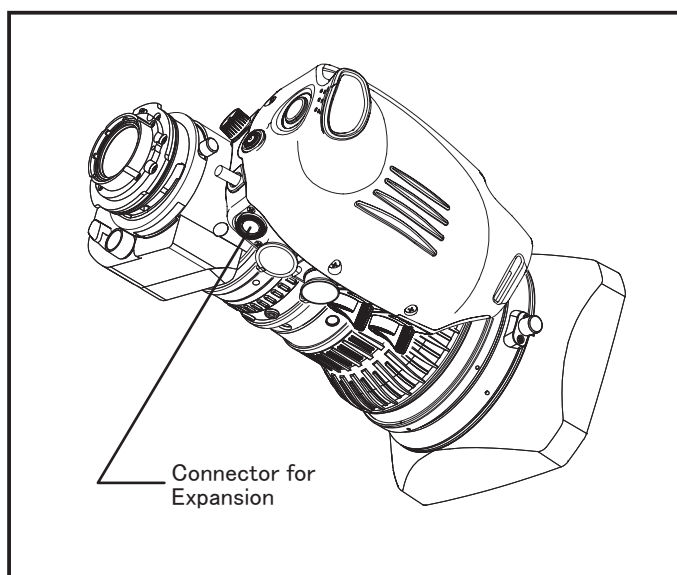


10. ABOUT FUNCTION & MODE SELECT SWITCHES

The function of some switches incorporated in this lens can be changed to other functions.

The function can be changed by setting switches in the function & mode select switches.

The function & mode select switches are accessible by removing the round rectangular rubber cap on the front of the drive unit.

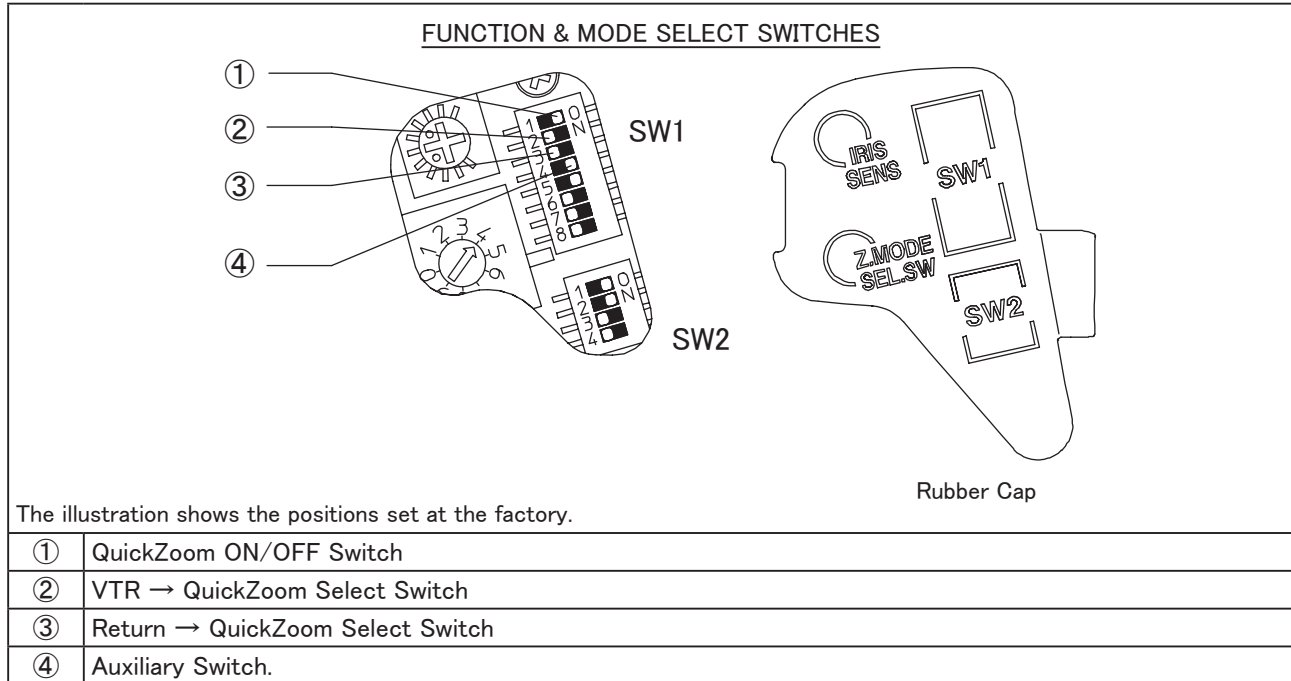

① **Quickzoom ON/OFF Switch**

This switch changes the function of the quickzoom & auto cruising zoom switch to ON and OFF.

② **VTR → Quickzoom Select Switch**

This switch changes the function of the VTR switch to that of the quickzoom switch.

(The function of the VTR switch incorporated in the zoom rate demand unit or the shot box linked to this lens is also changed to that of the quickzoom switch.)

③ **Return → Quickzoom Select Switch**

This switch changes the function of the return switch to that of the quickzoom switch.


(The function of the return switch incorporated in the zoom rate demand unit or the shot box linked to this lens is also changed to that of the quickzoom switch.)

④ **Auxiliary Switch**

An auxiliary switch.

MEMO

FUNCTION & MODE SELECT SWITCHES

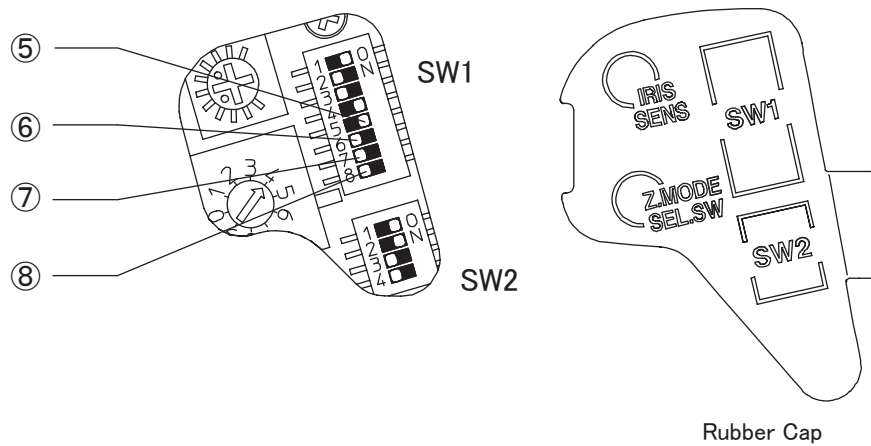

The illustration shows the positions set at the factory.

⑤	Auto Cruising Zoom ON/OFF Switch
⑥	Iris Comp ON/OFF Switch
⑦	Iris A-M Position Change Switch
⑧	Zoom Limit ON/OFF Switch

⑤ Auto Cruising Zoom ON/OFF Switch

This switch changes the auto cruising zoom function to ON and OFF.

If this switch is set to OFF, an auto cruising zoom operation cannot be performed from all the switches that are set as an auto cruising zoom switch.

⑥ IRIS Compensation ON/OFF Switch

This switch changes the iris compensation function to ON and OFF.

※ In the iris remote mode, the image of the picture darkens when the extender is used. The iris compensation function prevents this happening.

⑦ IRIS Auto-Manual position change Switch

The positions of the auto iris mode and the manual mode set in the iris mode select knob can be interchanged by setting this switch.


⑧ Zoom Limit ON/OFF Switch

This switch changes the zoom limit function to ON and OFF.

For the zoom limit function, refer to section “Zoom Limit Operation” (pages 10 thru 11).

MEMO

FUNCTION & MODE SELECT SWITCHES

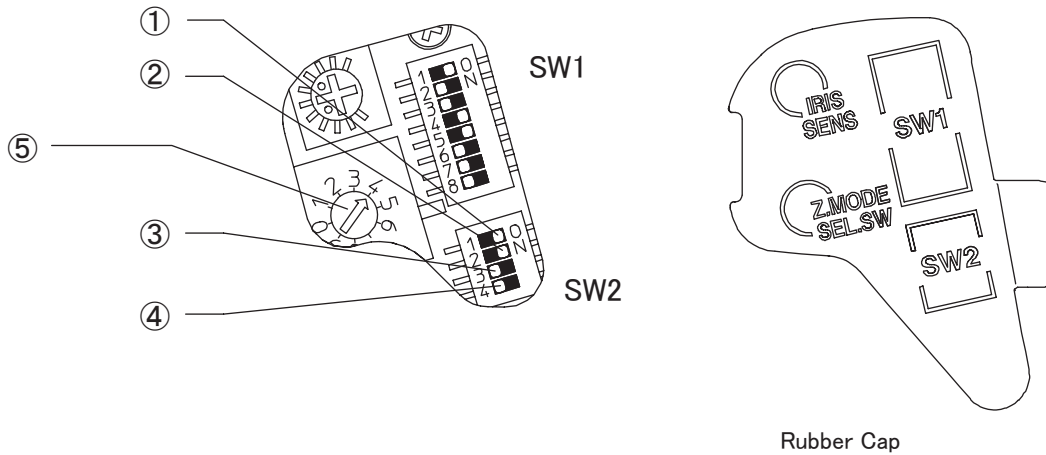

The illustration shows the positions set at the factory.

①	Camera Communication ON/OFF Switch
②	Analog Zoom Demand Zoom Mode Function ON/OFF Switch
③	
④	Robotic, P/T Mode Select Switch
⑤	Zoom Mode Select Switch

① Camera Communication ON/OFF switch

This switch changes the function of serial communication with a camera to ON and OFF.

Note. Set this switch to “OFF” when a malfunction occurs and it is assumed that the malfunction is caused by a serial communication failure.

②③ Analog Zoom Demand Zoom Mode Function ON/OFF Switch

In a zoom operation with an analog zoom demand control unit, the zoom mode function (function of selecting the characteristics of “zoom speed vs zoom control signal”) can be switched to ON and OFF.

Settings of Function & Mode Select Switches (SW2)		Zoom Mode Function
SW2- ②	SW2- ③	
ON	ON	Enable (ON)
ON	OFF	Disable (OFF)
OFF	ON	Enable (ON)
OFF	OFF	Disable (OFF)
		- To operate the zoom with the lens mounted on a pan-tilt head, use these settings. - When the camera is powered ON with these settings while the zoom servo/manual select knob is being set to “S,” initial zoom operation is performed immediately after power ON.


④ Robotic, P/T Mode Select Switch

To control the lens via serial communication by mounting the camera to the Robot System or the pan-tilt head, turn this switch ON.

⑤ Zoom Mode select switch

The characteristics of “Zoom Speed vs Rotational Angle of Zoom Seesaw Control Lever” can be selected from ten modes.

Refer to the following figure.

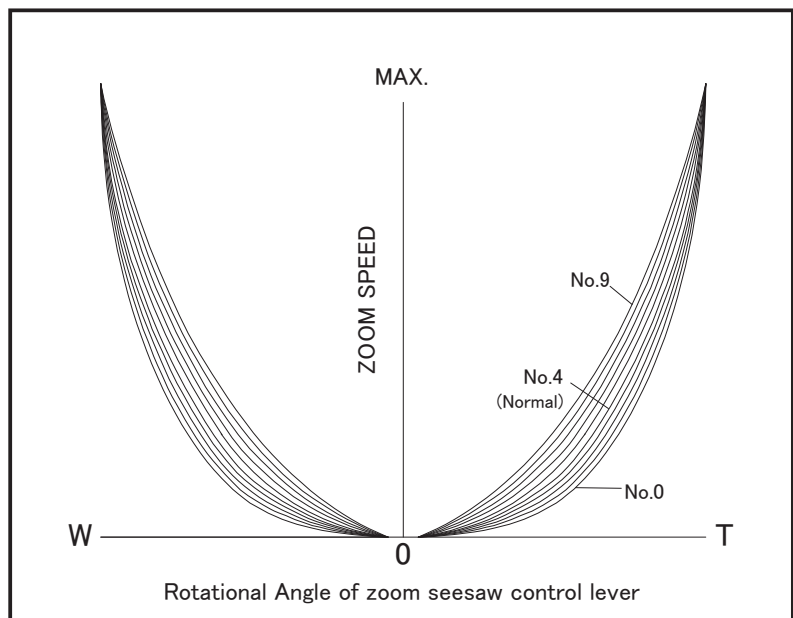

■ TABLE OF SWITCH FUNCTIONS

The functions of switches (return switch, VTR switch, quickzoom & auto cruising zoom switch, and iris mode select switch) can be changed to other functions by combination of the settings of the function & mode select switches. Refer to the following tables.

◎ Return Switch

Settings of Function & Mode Select Switches		Function of Return Switch
SW1- ③ RET → QuickZoom	SW1- ⑤ AutoCruise=ON	
OFF	—	Return Switch
ON	ON	Quickzoom & auto cruising zoom switch
ON	OFF	Quickzoom switch

◎ VTR Switch

Settings of Function & Mode Select Switches		Function of VTR Switch
SW1- ② VTR → QuickZoom	SW1- ⑤ AutoCruise=ON	
OFF	—	VTR Switch
ON	ON	Quickzoom & auto cruising zoom switch
ON	OFF	Quickzoom switch

◎ QuickZoom & Auto Cruising Zoom Switch

Settings of Function & Mode Select Switches		Function of QuickZoom & Auto Cruising Zoom Switch
SW1- ① QuickZoom =ON	SW1- ⑤ AutoCruise=ON	
ON	ON	Quickzoom & auto cruising zoom switch
OFF	OFF	Does not function
ON	OFF	Quickzoom switch
OFF	ON	Auto cruising zoom switch

◎ Iris Mode Select Switch


Settings of Function & Mode Select Switches	Function of Iris Mode Select Switch
SW1- ⑦ IRIS Auto-Manual position exchange	
OFF	A (Auto) is hand side, M (Manual) is Lens Side. (Standard position set at the factory.)
ON	M (Manual) is hand side, A (Auto) is lens side. (Put the mode indication label enclosed with lens.)

MEMO

11. IRIS ADJUSTMENT

Since the iris is precisely adjusted at the factory before shipment, normally the readjustment is not required. But when an abnormality occurs for some reason, the readjustment can be made as described below.

The adjusting trimmer becomes visible inside the drive unit by removing the cap at the front of the drive unit. Use a small screwdriver or similar implement to rotate the trimmer.

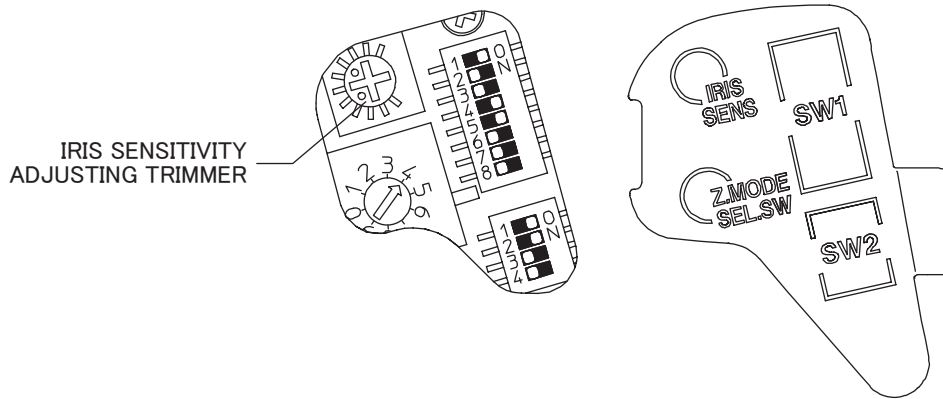

The illustration shows the positions set at the factory.


11.1 IRIS SENSITIVITY ADJUSTMENT

- Set the iris control mode to AUTO on the camera side.
(For setting instruction, refer to the operation manual of the camera.)
- Set the iris mode select switch of the lens to "A."
- Rotate the iris sensitivity adjusting trimmer using a small screwdriver or a similar implement.
The iris sensitivity increases by clockwise rotation, and decreases by counterclockwise rotation.
Set the adjusting trimmer for the maximum sensitivity within the range hunting does not occur.

* Hunting : The phenomenon in which the iris shakes around the optimum iris position in the auto iris operation.

MEMO

12. DETACHING/ATTACHING LENS HOOD

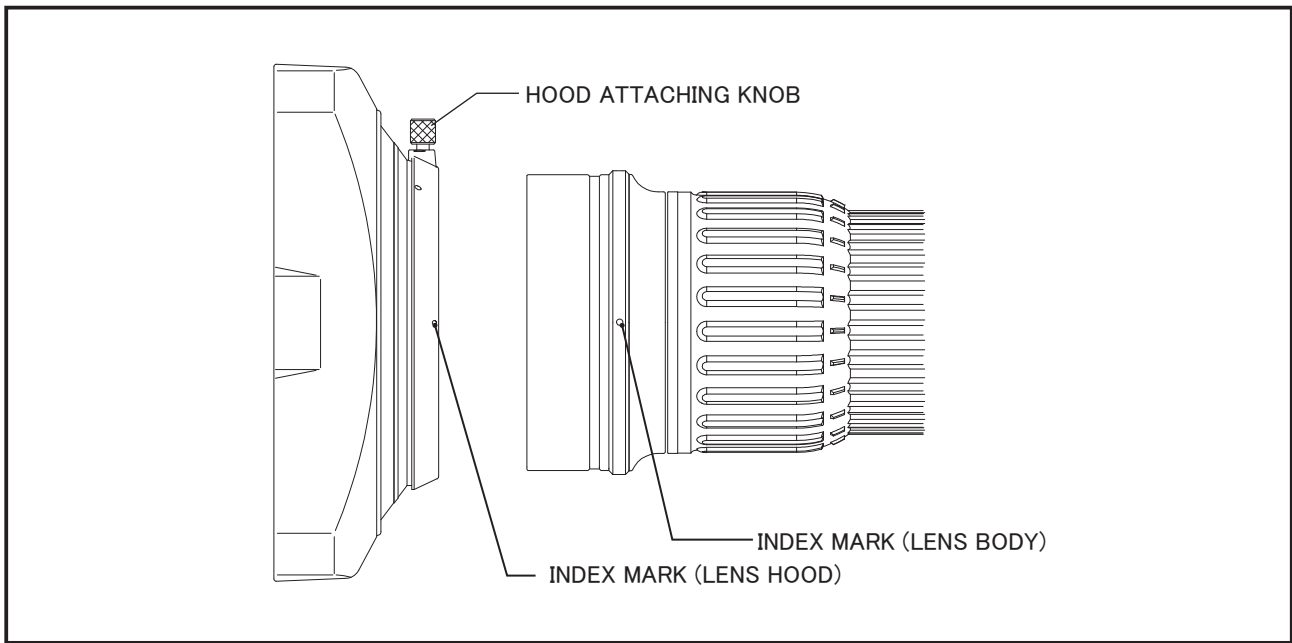

12.1 DETACHING

- Rotate the hood attaching knob counterclockwise to loosen it.
- Pull the lens hood straight toward the front to detach it.

12.2 ATTACHING

- Rotate the hood attaching knob counterclockwise to loosen it.
- Insert the lens hood until the mating surfaces of the lens hood and the lens body contact with each other.
- Rotate the lens hood so that the index mark on the lens hood aligns with the index mark on the lens body.
- Tighten the hood attaching knob to secure the lens hood.

MEMO

13. MAINTENANCE

13.1 CLEANING THE LENS

Prepare lens cleaning liquid and lens cleaning paper on the market.

- a. First use a soft brush or blower brush to brush dust off the surface of the lens.
- b. Fold the cleaning paper to an adequate size, and dip a part of it into the liquid.

Lightly wipe the lens from the center to the periphery while drawing a spiral with the wet paper part.

Repeat this operation using new paper until the lens is thoroughly cleaned.

13.2 REMOVING THE MOISTURE

When the lens main body is wet, first wipe the water on the external part with dry cloth immediately.

Then put it together with desiccant into a vinyl bag for sealing to remove the moisture inside.

13.3 STORAGE

If it is assumed that the lens will not be used for a long term, store it in a place where high temperature, much moisture or corrosive gas is absent.

13.4 CAUTION

This lens is composed of the optical unit and drive unit.

But never remove the screws that fasten these two units. If the units are separated, it will be required to readjust mechanism in the drive unit.

13.5 INSPECTION

If an abnormality occurs on the lens, contact the sales agent from which you purchased the lens.


To maintain the high performance for a long term for use, we recommend that a periodic inspection is conducted.

Note that we may not be able to inspect and repair our products that have been remodeled on the user's end.

MEMO

14. CONNECTOR PIN ASSIGNMENTS

The connector pin assignments and functions are listed below.

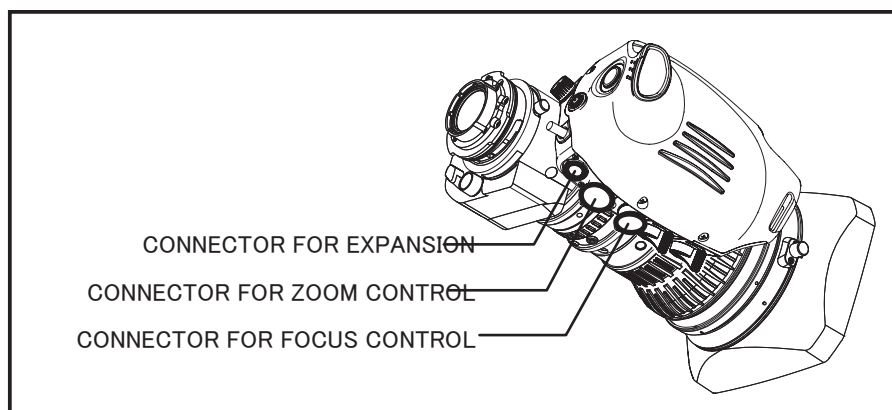

■ CONNECTOR FOR FOCUS CONTROL



HR10G-10R-12S (HIROSE)

	SIGNAL	
1	+V	(+12V DC)
2	GND	0V
3	COM+V	(7.5V DC)
4	COM	(5.0V DC)
5	COM-V	(2.5V DC)
6	FOCUS DEMAND DETECT	(ANALOG DEMAND=+12V, DIGITAL DEMAND= +5V)
7	FOCUS CONTROL	(Far=7.5V, Near=2.5V)
8	FOCUS POSITION	(Far=2.5V, Near=7.5V)
9	ECU CONTROL SIGNAL	
10	N.C.	
11	N.C.	
12	N.C.	

■ CONNECTOR FOR ZOOM CONTROL




HR10G-10R-12S (HIROSE)

	SIGNAL	
1	+V	(+12V DC)
2	GND	0V
3	COM+V	(7.5V DC)
4	COM	(5.0V DC)
5	COM-V	(2.5V DC)
6	ZOOM DEMAND DETECT	(ANALOG DEMAND=OPEN, DIGITAL DEMAND= +5V)
7	ZOOM CONTROL	(WIDE=7.5V, TELE=2.5V)
8	ZOOM POSITION	(WIDE=2.5V, TELE=7.5V)
9	VTR SW	
10	VTR SW COM	
11	RET SW	
12	RET SW COM	

■ CONNECTOR FOR EXPANSION

HR25-9R-20S (HIROSE)

	SIGNAL	
1	N.C.	
2	GND	0V
3	TxD	(RS-232C)
4	+5V	(1kΩ)
5	DTR	(RS-232C)
6	DSR	(RS-232C)
7	RxD	(RS-232C)
8 ~ 13	N.C.	
14	EXTENDER ANSWER	× 2=L (<0.5V)
15	N.C.	
16	ZOOM(A)	
17	ZOOM(B)	
18	FOCUS(A)	
19	FOCUS(B)	
20	N.C.	



17. OPTIONAL ACCESSORIES


17.1 All Servo System – 1 (Digital Focus,Digital Zoom)

	ACCESSORY NAME	MODEL	REMARKS	
①	Focus Position Demand Unit	EPD-41A-D02	Control unit for focus operation.	Operation angle of the knob is two turns.
		(EPD-41A-D01)		(Operation angle of the knob is one turn.)
②	Zoom Rate Demand Unit	ERD-40A-D01	Control unit for zoom operation and preset operation.	
③	Mounting Clamp	MCA-37	Used with EPD and ERD for their installation.	
④	Lens			

Configuration


All Servo System – 1

Note: The speed of the zoom achieved by operating the ZOOM RATE DEMAND UNIT is the speed that reflects both the setting established for the zoom maximum speed control knob of the drive unit and the setting established for the Speed Control Knob of the ZOOM RATE DEMAND UNIT. Depending on the setting established for the zoom maximum speed control knob, the operation time of the servo may be longer than the value given in the specifications. For further details concerning the speed control knob of the ZOOM RATE DEMAND UNIT, refer to the operation manual of the ZOOM RATE DEMAND UNIT.

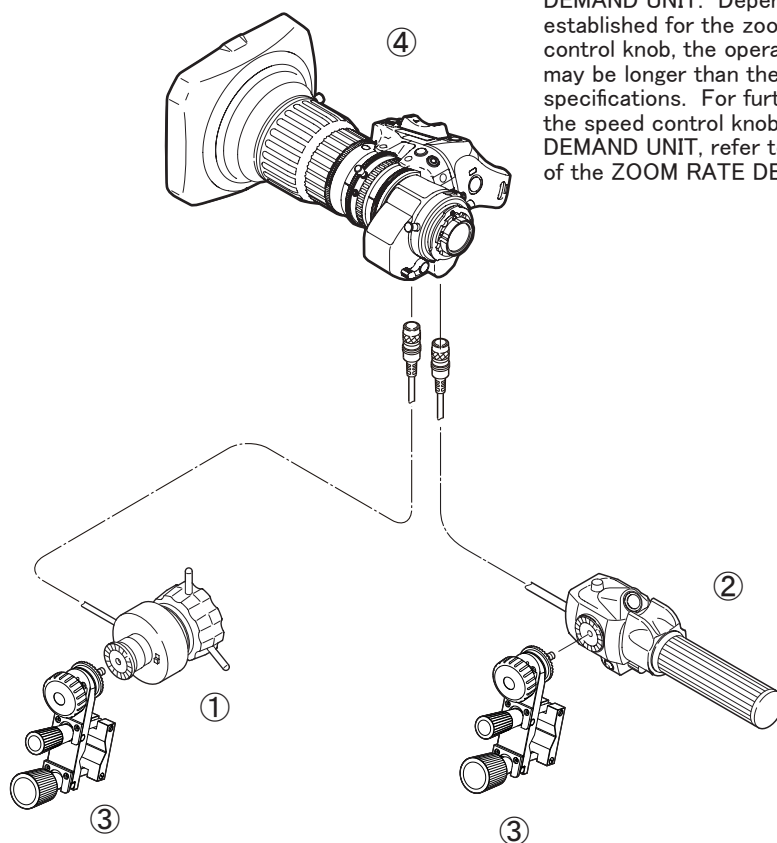

17.2 All Servo System – 2 (Control by Personal Computer)

	ACCESSORY NAME	MODEL	REMARKS
①	EXTENSION CABLE	SA-206D-005	Required when a personal computer is used to control the iris, focus and zoom of the lens.
②	Lens		
③	Personal Computer		

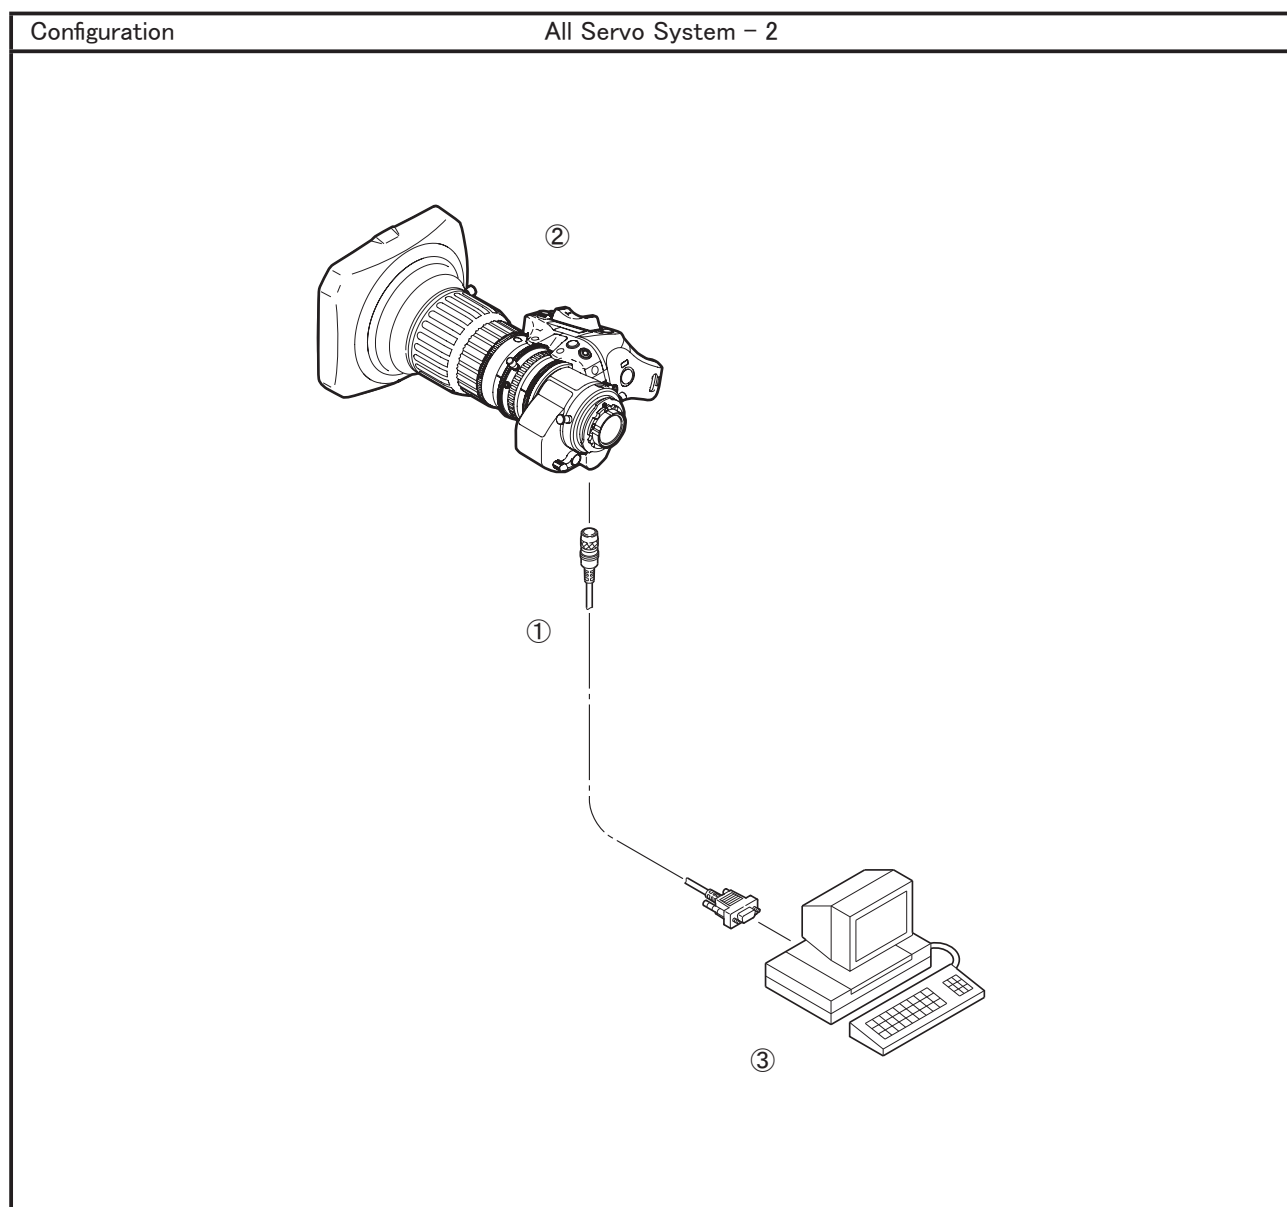

18. SPECIFICATIONS

ITEM \ LENS	UA14x4.5BERD-S6B	UA18x5.5BERD-S6
Application	2/3" Format Color Camera (Prism Optical System)	
Focal Length	4.5 ~ 63 mm [9 ~ 126 mm] *	5.5 ~ 100 mm [11 ~ 200 mm] *
Zoom Ratio	14 ×	18 ×
Extender Magnification	2 ×	
Maximum Relative Aperture (F No.)	F1.8 (4.5 ~ 41 mm) ~ F2.8 (63 mm) [F3.6 ~ F5.6] *	F1.8 (5.5 ~ 62 mm) ~ F2.9 (100mm) [F3.6 ~ F5.8] *
Iris Range	F1.8 ~ F16, Closed	
Image Format (H × V)	9.59 × 5.39 mm (ϕ 11.0 mm) Aspect Ratio 16 : 9	
Flange Focal Length (IN AIR)	48 mm (Adjustable Range: $\pm$ 0.2 mm)	
Back Focal Length (IN AIR)	39.57 mm	39.59 mm
Minimum Object Distance (from front of Lens)	0.3 m (0.05 m in Macro Operation)	0.4 m (0.05 m in Macro Operation)
Field Angle (H × V)	WIDE 93.6° × 61.8° [56.1° × 33.3°] *	82.2° × 52.2° [47.1° × 27.5°] *
	TELE 8.7° × 4.9° [4.4° × 2.5°] *	5.5° × 3.1° [2.8° × 1.6°] *
Object Area at M.O.D. (H × V)	WIDE 744 mm × 418 mm [365 mm × 205mm] *	800 mm × 450 mm [395 mm × 222mm] *
	TELE 51 mm × 29 mm [27 mm × 15mm] *	44 mm × 25 mm [22 mm × 12mm] *
Front Diameter	ϕ 95 mm	
Full Length	238.5 mm	240.5 mm
Filter Screw	M127 × 0.75 (Mounted on the lens hood)	
Iris Control	Servo or Manual (Operation angle : 76°)	
Zoom Control	Servo (Operation Time: 0.7 ~ 70 s) or Manual (Operation angle : 90°)	
Focus Control	Manual (Including Motor for Servo Control) (Operation angle : 144.5°)	
Mount	Bayonet Mount	
Current Consumption (at 12V DC, Approx.)	75 mA (Quiescent) 625 mA (Maximum)	
Mass (without Lens Hood, Approx.)	2.21 kg	2.04 kg

Note. The values in the brackets are given when the 2 × range extender is used.

LENS		UA24x7.8BERD-S6
ITEM		
Application		2/3" Format Color Camera (Prism Optical System)
Focal Length		7.8 ~ 187 mm [15.6 ~ 374 mm] *
Zoom Ratio		24 ×
Extender Magnification		2 ×
Maximum Relative Aperture (F No.)		F1.8 (7.8 ~ 118 mm) ~ F2.85 (187 mm) [F3.6 ~ F5.7] *
Iris Range		F1.8 ~ F16, Closed
Image Format (H × V)		9.59 × 5.39 mm (φ 11.0 mm) Aspect Ratio 16 : 9
Flange Focal Length (IN AIR)		48 mm (Adjustable Range: ± 0.2 mm)
Back Focal Length (IN AIR)		39.73 mm
Minimum Object Distance (from front of Lens)		0.8 m (0.04 m in Macro Operation)
Field Angle (H × V)	WIDE	63.2° × 38.1° [34.2° × 19.6°] *
	TELE	2.9° × 1.7° [1.5° × 0.8°] *
Object Area at M.O.D. (H × V)	WIDE	883 mm × 496 mm [459 mm × 258mm] *
	TELE	38 mm × 21 mm [20 mm × 11mm] *
Front Diameter		φ 100 mm
Full Length		220.5 mm
Filter Screw		M107 × 1 (Mounted on the lens hood)
Iris Control		Servo or Manual (Operation angle : 76°)
Zoom Control		Servo (Operation Time: 0.7 ~ 70 s) or Manual (Operation angle : 90°)
Focus Control		Manual (Including Motor for Servo Control) (Operation angle : 144.5°)
Mount		Bayonet Mount
Current Consumption (at 12V DC, Approx.)		75 mA (Quiescent)
		625 mA (Maximum)
Mass (without Lens Hood, Approx.)		1.98 kg

Note. The values in the brackets are given when the 2 × range extender is used.

LENS		UA18x7.6BERD-S6	UA23x7.6BERD-S6
ITEM			
Application		2/3" Format Color Camera (Prism Optical System)	
Focal Length		7.6 ~ 137 mm [15.2 ~ 274 mm] *	7.6 ~ 175 mm [15.2 ~ 350 mm] *
Zoom Ratio		18 ×	23 ×
Extender Magnification		2 ×	
Maximum Relative Aperture (F No.)		F1.8 (7.6 ~ 102 mm) ~ F2.4 (137 mm) [F3.6 ~ F4.8] *	F1.8 (7.6 ~ 119 mm) ~ F2.65 (175 mm) [F3.6 ~ F5.3] *
Iris Range		F1.8 ~ F16, Closed	
Image Format (H × V)		9.59 × 5.39 mm (φ 11.0 mm) Aspect Ratio 16 : 9	
Flange Focal Length (IN AIR)		48 mm (Adjustable Range: ± 0.2 mm)	
Back Focal Length (IN AIR)		40.51 mm	40.47 mm
Minimum Object Distance (from front of Lens)		0.6 m (0.05 m in Macro Operation)	0.8 m (0.04 m in Macro Operation)
Field Angle (H × V)	WIDE	64.5° × 39.0° [35.0° × 20.1°] *	64.5° × 39.0° [35.0° × 20.1°] *
	TELE	4.0° × 2.3° [2.0° × 1.1°] *	3.1° × 1.8° [1.6° × 0.9°] *
Object Area at M.O.D. (H × V)	WIDE	696 mm × 392 mm [362 mm × 204mm] *	915 mm × 514 mm [473 mm × 266mm] *
	TELE	41 mm × 23 mm [21 mm × 12mm] *	41 mm × 23 mm [21 mm × 12mm] *
Front Diameter		φ 85 mm	φ 100 mm
Full Length		204 mm	221.4 mm
Filter Screw		M82 × 0.75 (Mounted on the flens)	M95 × 1 (Mounted on the flens) M107 × 1 (Mounted on the lens hood)
Iris Control		Servo or Manual (Operation angle : 76°)	
Zoom Control		Servo (Operation Time: 0.7 ~ 70 s) or Manual (Operation angle : 90°)	
Focus Control		Manual (Including Motor for Servo Control) (Operation angle : 144.5°)	
Mount		Bayonet Mount	
Current Consumption (at 12V DC, Approx.)		75 mA (Quiescent)	
		625 mA (Maximum)	
Mass (without Lens Hood, Approx.)		1.74 kg	1.95 kg

Note. The values in the brackets are given when the 2 × range extender is used.

MEMO




Technical Drawings

各部の名称 / Nmaes of Parts / 部件名称


①	P : スイッチ詳細図	P : SWITCH DETAIL	P : 选择开关 详细图
②	アイリス感度調整トリマ	IRIS SENSITIVITY ADJUSTING TRIMMER	光圈灵敏度调节钮
③	機能&モード切替スイッチ	FUNCTION & MODE SELECT SWITCHES	功能和模式选择开关
④	ズームモード切替スイッチ	ZOOM MODE SELECT SWITCH	变焦模式选择钮
⑤	レンズフード取付つまみ	LENS HOOD ATTACHING KNOB	镜头遮光罩安装旋钮
⑥	レンズフード	LENS HOOD	镜头遮光罩
⑦	バンド	HAND BAND	手带
⑧	アイリスモード切替スイッチ	IRIS MODE SELECT SWITCH	光圈模式选择开关
⑨	アイリスモーメンタリスイッチ	IRIS MOMENTARY SWITCH	光圈手动 / 自动切换开关
⑩	ズームシーソーコントロールレバー	ZOOM SEESAW CONTROL LEVER	压板式变焦控制杆
⑪	リターンスイッチ	RETURN SWITCH	回放开关
⑫	F.f 固定つまみ	F.f LOCKING KNOB	镜座距锁定旋钮
⑬	F.f 調整リング	F.f ADJ. RING	镜座距调节环
⑭	F.f 指標	F.f BASE MARK	镜座距指标
⑮	ズームレバー取付ねじ (2カ所)	THREADED HOLES FOR ZOOM LEVER (2 PLACES)	变焦控制杆螺孔 (2 个)
⑯	モジュール取付ねじ (2カ所)	THREADED HOLE FOR ZOOM SERVO MODULE (2 PLACES)	变焦控制模块螺孔 (2 个)
⑰	モジュール位置決め穴 (2カ所)	MODULE POSITIONING HOLE (2 PLACES)	模块定位孔 (2 个)
⑱	指標線	INDEX LINE	指标线
⑲	アイリスリング	IRIS RING	光圈环
⑳	フランジバック (F.f)	FLANGE FOCAL LENGTH (F.f)	镜座距 (F.f)
㉑	バックフォーカス (B.f)	BACK FOCAL LENGTH (B.f)	后焦距 (B.f)
㉒	光学ガラス	GLASS ELEMENTS	镜玻璃镜片

㉓	マクロレバー	MACRO LEVER	微距拍摄控制杆
㉔	マクロリング	MACRO RING	微距拍摄控制环
㉕	フィルタ取付ねじ (フード)	FILTER SCREW (ON HOOD)	滤镜螺丝 (遮光罩)
㉖	予備 (空)	Reserved (blank)	保留 (空)
㉗	フォーカスリング	FOCUS RING	聚焦环
㉘	フォーカスサーボ / マニュアル切替つまみ	FOCUS SERVO/MANUAL SELECT KNOB	聚焦伺服 / 手动切换旋钮
㉙	ズームサーボ / マニュアル切替スイッチ	ZOOM SERVO / MANUAL SELECT KNOB	变焦伺服 / 手动选择旋钮
㉚	ズームリング	ZOOM RING	变焦环
㉛	フォーカスコントロール用コネクタ	CONNECTOR FOR FOCUS CONTROL	聚焦控制连接器
㉜	ズームコントロール用コネクタ	CONNECTOR FOR ZOOM CONTROL	变焦控制连接器
㉝	拡張用コネクタ	CONNECTOR FOR EXPANSION	扩展插口
㉞	カメラ用ケーブル	CABLE TO CAMERA	摄像机连线
㉟	指標線角度	ANGLE OF INDEX LINE	指标线角度
㊱	ズームレバー	ZOOM LEVER	变焦控制杆
㊲	マウント	MOUNT	支座
㊳	位置決めピン	POSITIONING PIN	定位锁栓
㊴	ズームレバーホルダ	ZOOM LEVER HOLDER	变焦控制杆基座
㊵	ズーム最大スピード調節つまみ	ZOOM MAXIMUM SPEED CONTROL KNOB	最大变焦速度控制旋钮
㊶	VTR スイッチ	VTR SWITCH	VTR 开关
㊷	クイックズーム&オートクルー징ズームスイッチ	QUICKZOOM & AUTO CRUISING ZOOM SWITCH	快速变焦和自动导航变焦开关
㊸	エクステンダ切替レバー	EXTENDER SELECT LEVER	倍率镜选择杆
㊹	指標点	INDEX MARK	指标点

(特に表記がある場合を除いて) 単位 : mm
(UNLESS OTHERWISE SPECIFIED) UNIT : mm
(另有規定除外) 単位 : 毫米

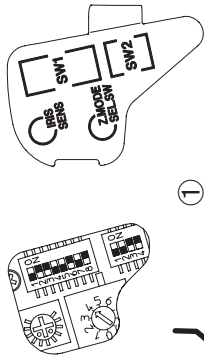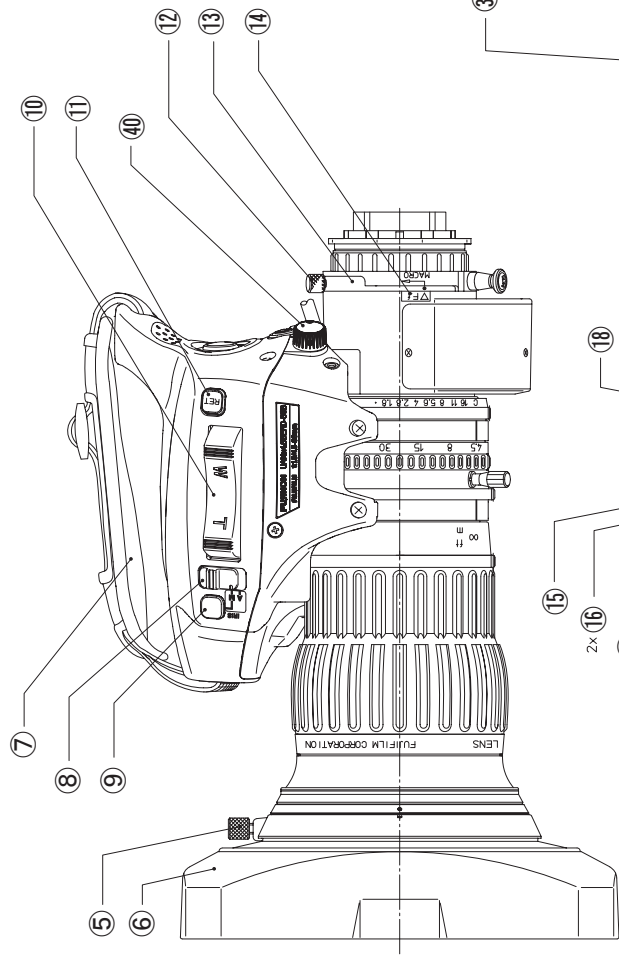


(CONNECTOR: SN-10-12P, SAM WOO)

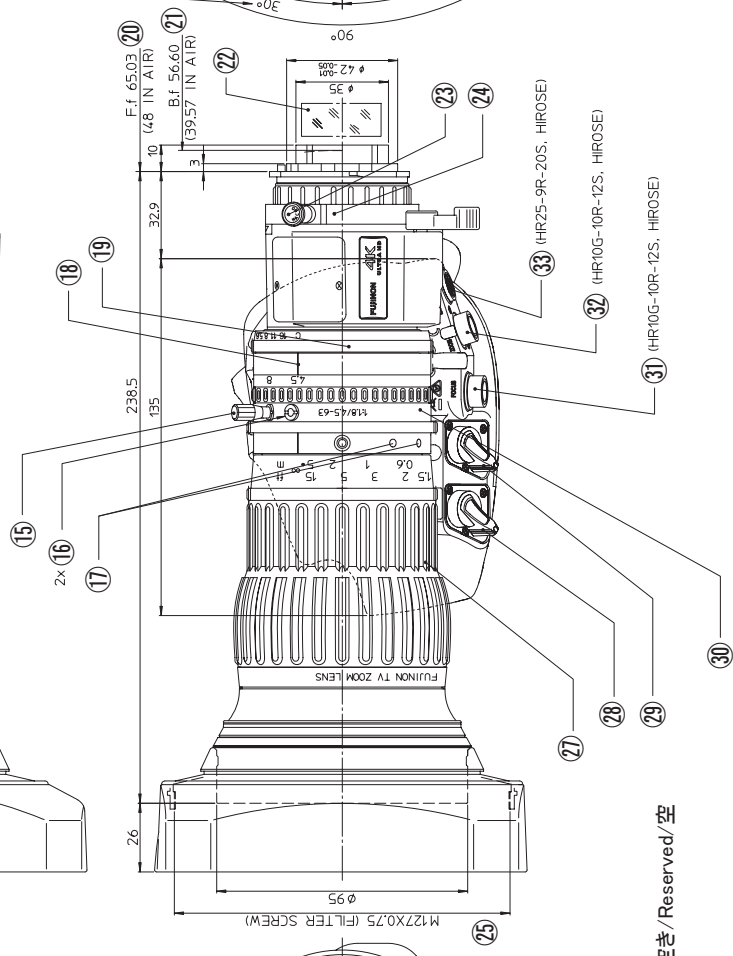

26 空き / Reserved / 空

Outline Drawing
UA14 X 4.5BERD-S6B Fig.1





(特別に表記がある場合を除いて) 単位: mm
(UNLESS OTHERWISE SPECIFIED) UNIT: mm
(另有規定除外) 単位: 毫米

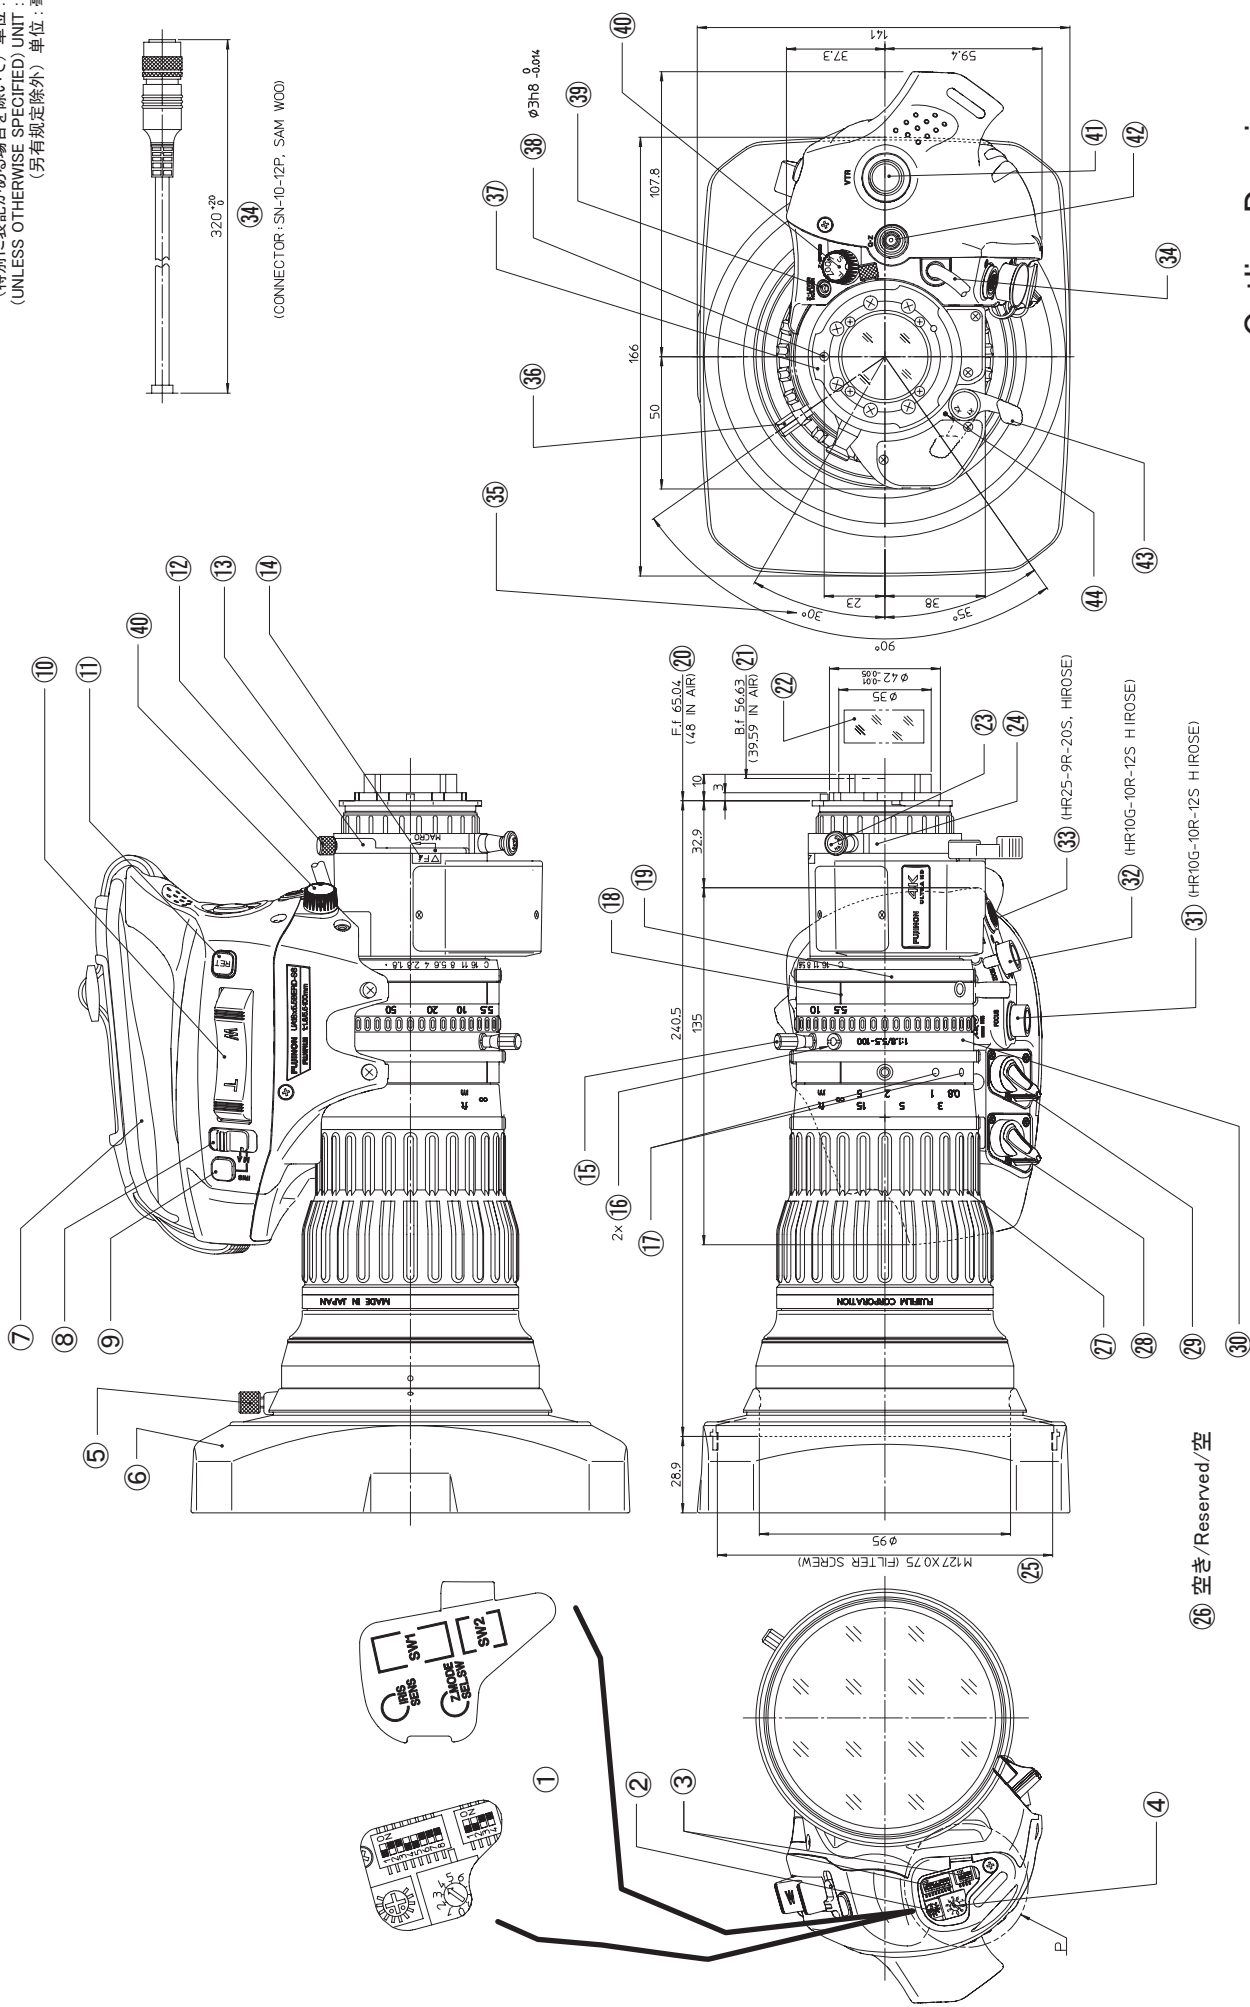

Outline Drawing
UA18 X 5.5BERD-S6 Fig.2

320⁺²⁰

(34) (CONNECTOR : SN-10-12P, SAM WOO)

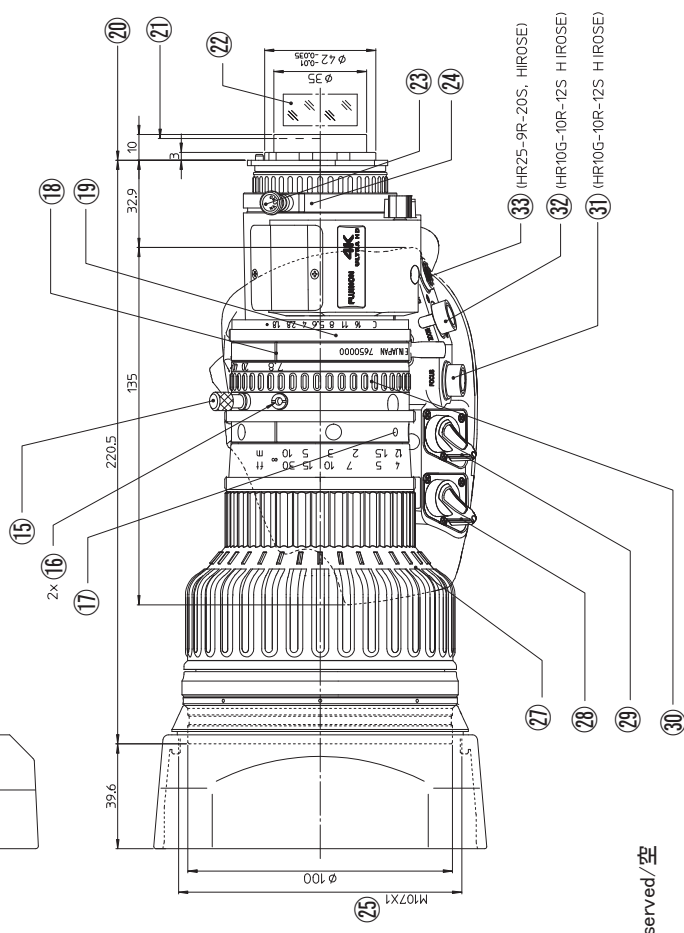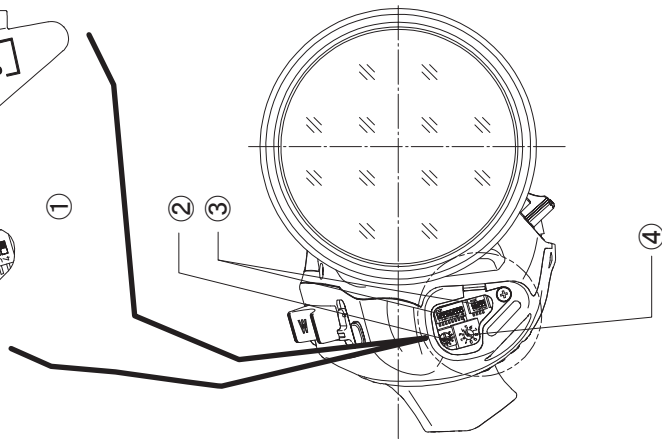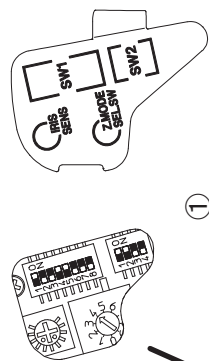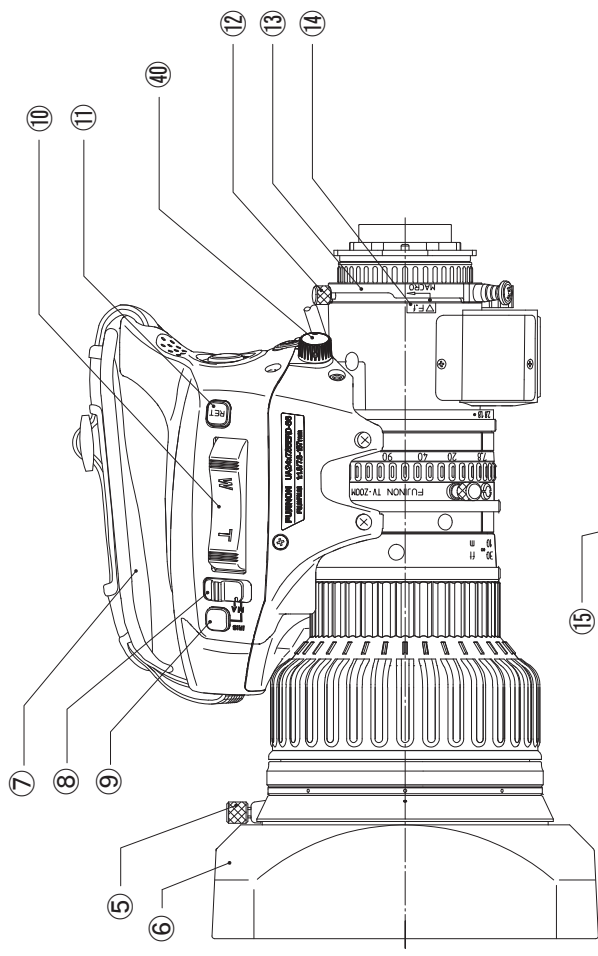






②⑥ 空き/Reserved/空

Outline Drawing
UA24 X 7.8BERD-S6 Fig.3

GLP765AS600+11 SS0002507-00

320⁺²⁰₀

(CONNECTOR: SN-10-12P, SAM WOO)

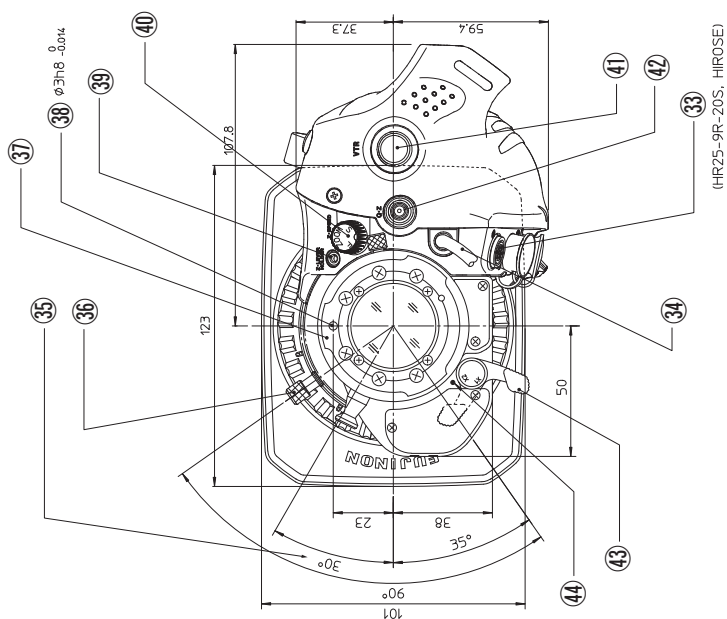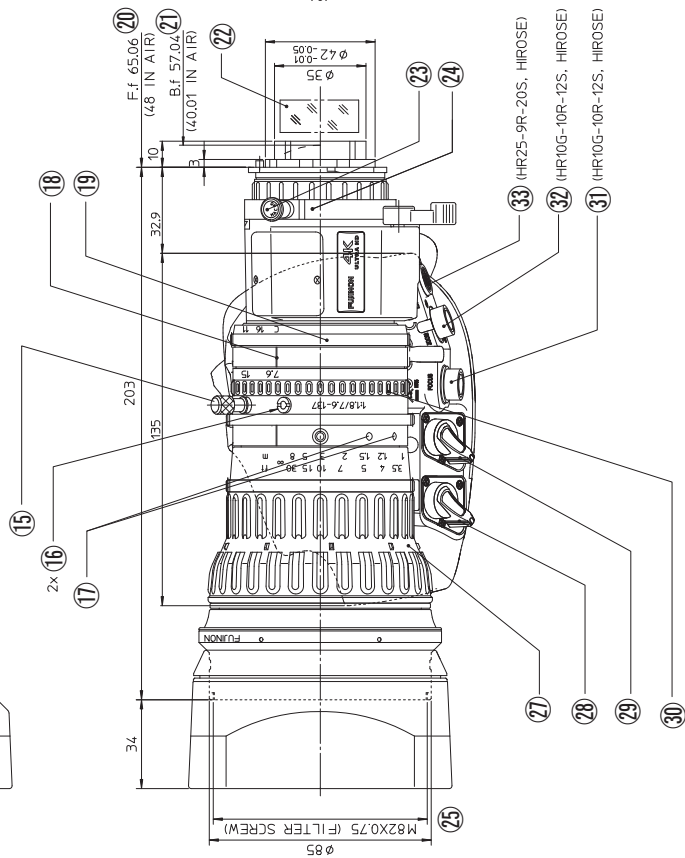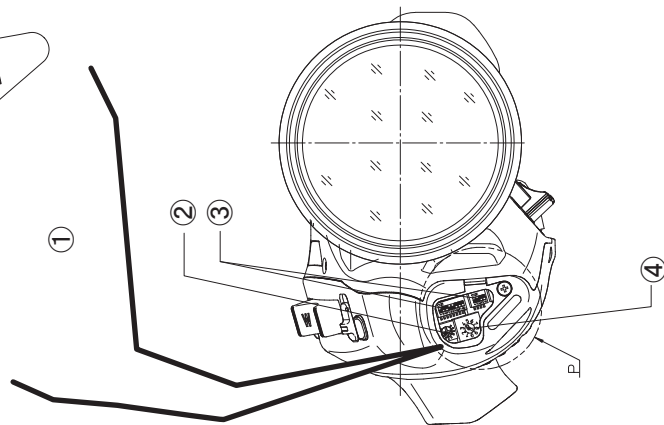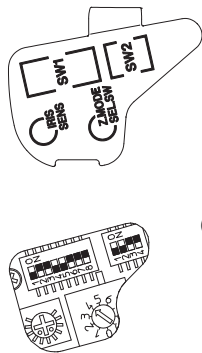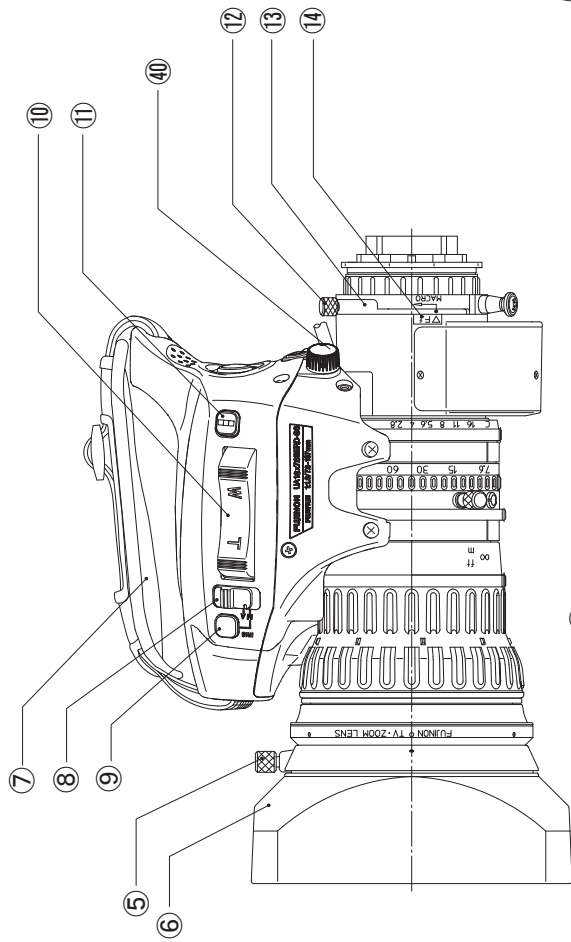





26 Reserved

Outline Drawing
UA18 X 7.6BERD-S6 Fig.4

GLP652AS600 SS0003007-00

Technical drawing of a cable with a dimension line indicating a length of 320^{+20}_0 mm.

(CONNECTOR: SN-10-12P, SAM WOO)

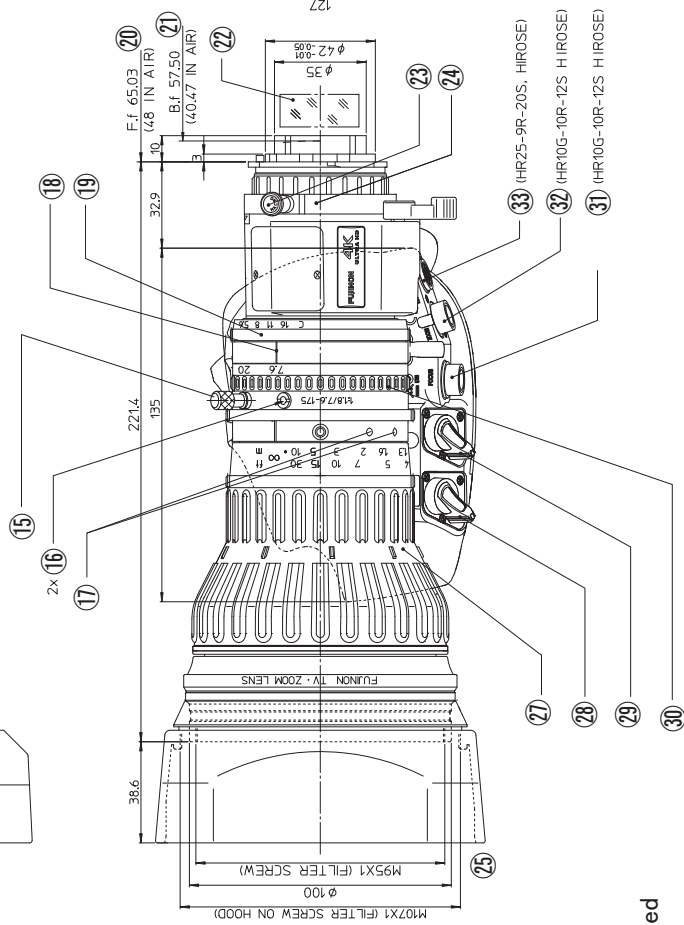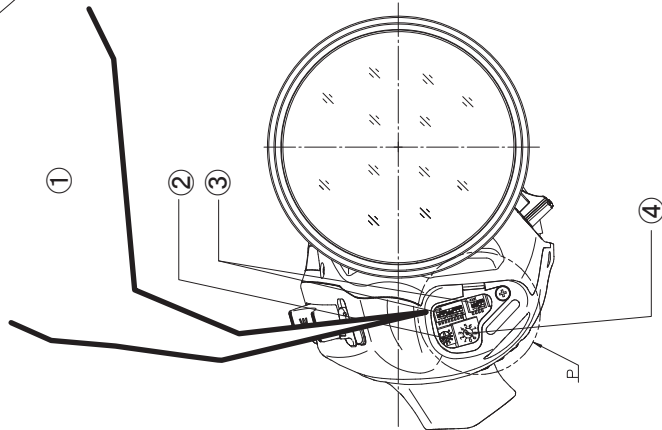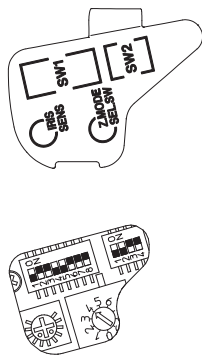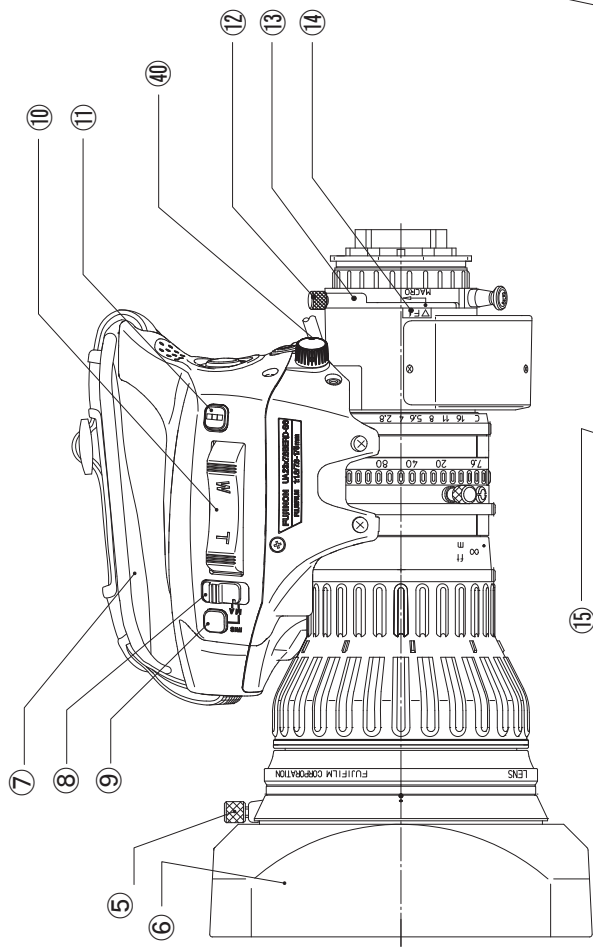

Reserved


(HR25-9R-20S, HIROSE)

Outline Drawing
UA23 X 7.6BERD-S6 Fig.5

GLP481DS600 SS0003008-00

MEMO

切取線 --- CUT LINE --- 切開線

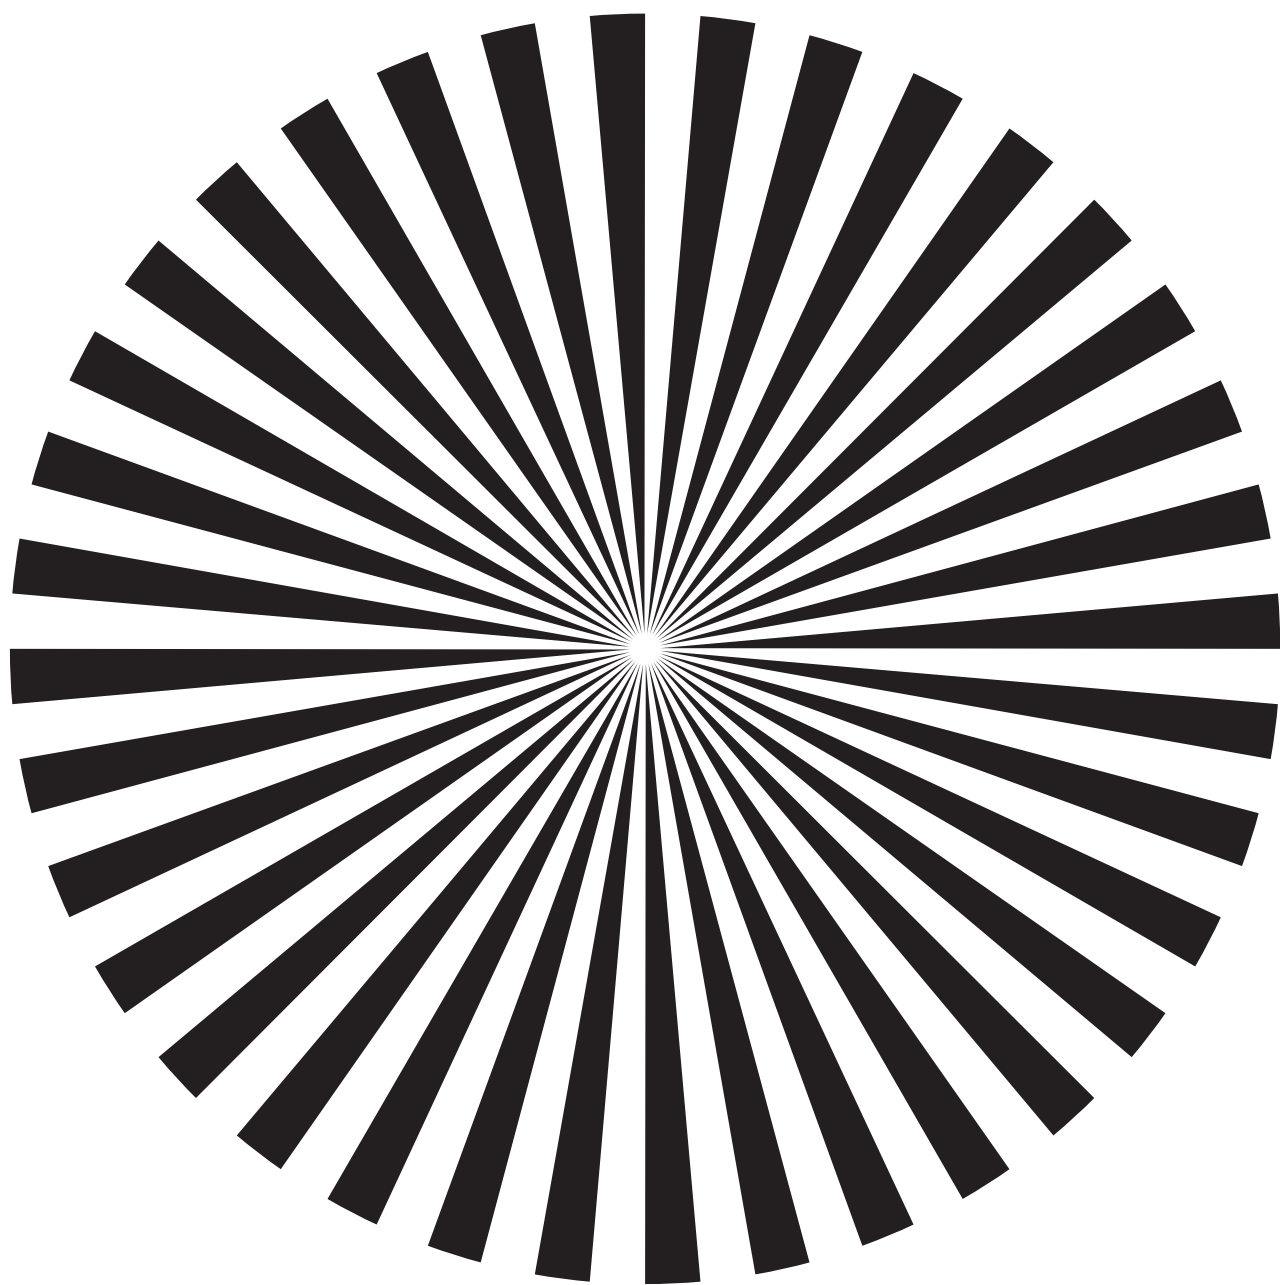

ジーマンスター / SIEMENS STAR / 西门子星标

FUJINON
FUJIFILM

MEMO