

MINI TRIPOD

CARBON FIBER / WITH BALLHEAD



RCMTT-1113

ROBUS™

Precautions


- Do not exceed the tripod's maximum load capacity.
- Ensure that all appropriate locks are engaged when necessary.
- This tripod should be used only in temperatures ranging between -22°F and 140°F. Do not operate in salt water. Dry the tripod if it becomes wet.
- Remove the camera from the ballhead during setup or transport.
- Clean the unit with only a soft, dry cloth.
- All images are for illustrative purposes only.

Specifications

Maximum Load	11 lb. (5 kg)
Maximum Height	13.4 in. (34 cm)
Minimum Height	4.3 in. (10.9 cm)
Folded Length	11 in. (27.9 cm)
Leg Sections	2
Leg Positions	3 positions (25°, 55°, 85°)
Vertical Tilt	0° to 90°
Panning Range	360°
Head Type	Ballhead

Base Mount	3/8-16
Quick-Release Plate Type	Arca-type
Quick-Release Plate Mount	1/4-20
Controls	Quick-release knob, Ratchet-style ballhead lock, Pan lock, Leg angle lock (×3), Twist lock (×3)
Material	Tripod: 10X Carbon Fiber Ballhead: CNC Machined Aluminum
Weight	1.5 lb. (680 g)

Overview

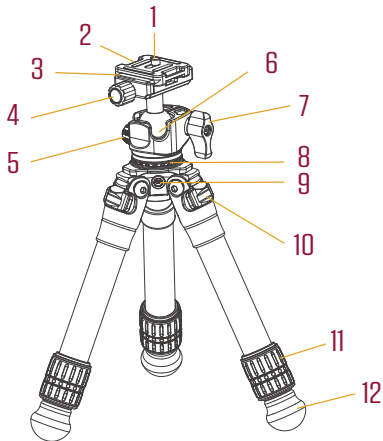

1. 1/4-20 mounting screw

2. Quick-release plate

The Arca-style compatible quick-release plate has a 1/4-20 mounting screw. Use a flat screwdriver or coin to tighten the screw to the base of your camera.

3. Balancing scale

4. Quick-release knob

Loosen the knob and remove the quick-release plate. Tighten the knob to secure the quick-release plate.

5. Pan lock

Loosen the pan lock and reposition your camera. Tighten the lock to maintain the pan position and when you screw and unscrew the ballhead from the tripod.

6. 90° notch (×2)

Use the notch to switch your camera from landscape to portrait orientation.

7. Ballhead lock

Slowly turn the handle to loosen and reposition the head. Tighten the lock to secure the head's position. For a better grip, pull the handle out to reposition it, and release it to reengage.

Important! Always support your camera and lens with one hand when you loosen the locking handle.


8. Pan scale

9. 1/4-20 accessory socket

Attach any accessory or accessory arm with a 1/4-20 stud to the tripod.

10. Leg angle lock

Pull the leg angle lock all the way out, and swing the legs fully open to engage the spring. Then close the legs to set them at one of the three locking angles.

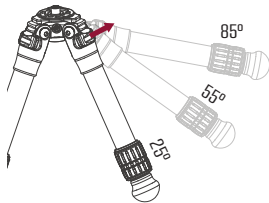

11. Twist lock

Turn the twist lock clockwise to loosen and adjust the length of each leg. Turn counterclockwise until secure to lock.

12. Rubber feet

Use the rubber feet on smooth and well-polished surfaces to prevent slipping. To secure the tripod on softer ground, unscrew the rubber feet to expose the spiked feet.

Ten-Year Limited Warranty

This Robus product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of ten (10) years from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function.

This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Robus Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Robus along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.robussupports.com or call Customer Service at 212-594-2353.



ROBUS™
A Gradus Group Brand

Product warranty provided by the Gradus Group. www.gradusgroup.com

Robus is a registered trademark of the Gradus Group. © 2024 Gradus Group LLC. All Rights Reserved.