

TRIPOD / MONOPOD

CARBON FIBER / WITH BALLHEAD



RCC-3060-WH

ROBUS™

Precautions

- Do not exceed the tripod's maximum load capacity.
- Ensure that all appropriate locks are engaged when necessary.
- This ballhead should be used only in temperatures ranging between -22°F and 140°F. Do not operate in salt water. Dry the ballhead if it becomes wet.
- Remove the camera from the ballhead during setup or transport.
- Clean the unit with only a soft, dry cloth.
- All images are for illustrative purposes only.


Specifications

Maximum Load	30 lb. (13.6 kg)
Maximum Height	60 in. (152.4 cm)
Minimum Height	7.5 in. (19 cm)
Folded Length	24.5 in. (62.2 cm)
Leg Sections	4
Leg Positions	3 positions (24°, 55°, and 80°)
Vertical Tilt	-45° to +90°
Panning Range	360°
Head Type	Dual-action ballhead
Base Mount	3/8-16 thread

Quick-Release Plate Type	Arca-type
Camera Mounting Screw	1/4-20
Controls	Quick-release knob Ballhead lock Pan lock Leg angle lock (×3) Twist lock (×3)
Material	Tripod: 10X carbon fiber Ballhead: CNC machined aluminum
Weight	3.7 lb. (1.68 kg)

Extending the Tripod Legs


Turn each twist-lock clockwise, and extend each leg to the desired length. Turn the twist-locks counterclockwise to tighten.



Adjusting the Leg Angles


The legs can be set at one of three angles.

Lift the leg angle lock, adjust the leg, and press down on the lock. Secure the leg by slightly widening the leg angle until the lock stops at one of the locking angles.

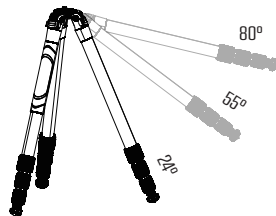


Adjusting Leg Angle Tension

Use the two 4M hex keys to stiffen or loosen the leg angle tension. Insert both hex keys into the screws on either side of the joint. Hold one side steady while you tighten or loosen the other side.




Swapping the Feet

The tripod comes with the rubber feet installed. To swap the feet, unscrew the rubber feet, and replace them with the included spikes.



Using One Leg as a Monopod

The leg with the leg warmer can be used as a monopod. Unscrew the leg, attach the appropriate foot, and adjust to the desired height. Unscrew the ballhead from the tripod and attach it to the monopod, or attach gear directly to the 3/8-16 screw.

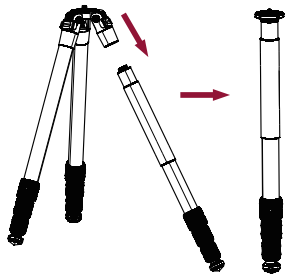

Ballhead Overview

1. Quick-release plate

Attach the plate to the base of a camera or accessory with the 1/4-20 mounting screw, and tighten the screw with the D-ring or a screwdriver.

2. 1/4-20 mounting screw

3. Quick-release knob

Set the plate into the clamp, and tighten the knob until secure.

4. Setscrew


5. Ballhead lock

6. 90° notch

Instantly switch from landscape to portrait orientation.


7. Pan lock

8. Bubble level (on the Arca clamp)

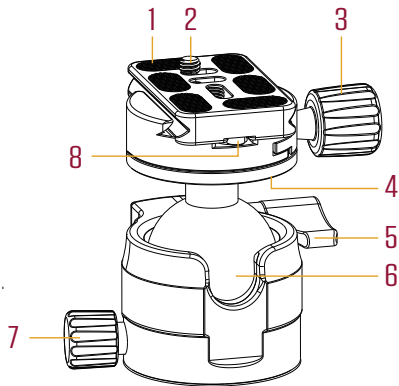


Adding Extra Accessories

Customize your setup by using the 1/4-20 threaded socket to attach accessories like a flexible or articulating arm.

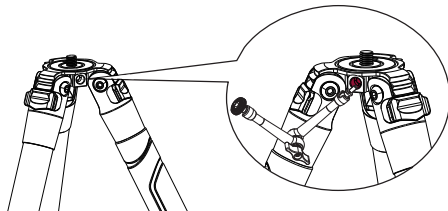

Adding a Counterweight

To prevent wobbling or tipping when the tripod is set up on an uneven surface or in windy conditions, hang a counterweight or sandbag on the weight hook.

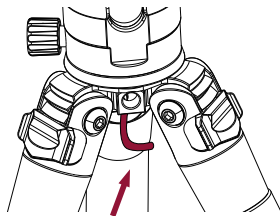

Ten-Year Limited Warranty

This Robus product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of ten (10) years from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function.

This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Robus Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Robus along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.robussupports.com or call Customer Service at 212-594-2353.



Product warranty provided by the Gradus Group. www.gradusgroup.com

Robus is a registered trademark of the Gradus Group. © 2024 Gradus Group LLC. All Rights Reserved.