


MACALLY

UCABLZKEYLPSG

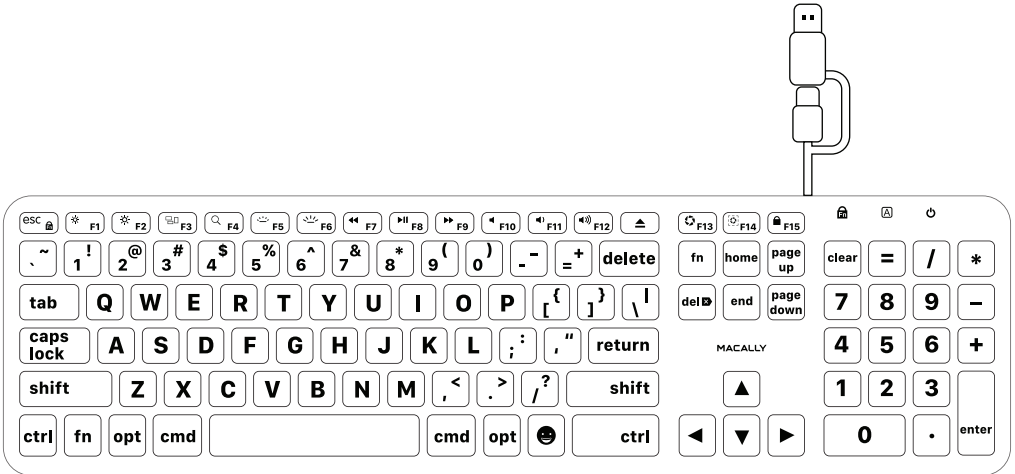

LARGE PRINT BACKLIT DUAL USB-A AND USB-C WIRED KEYBOARD FOR MAC

MACALLY

Welcome to the Macally family and thank you for purchasing the UCA-BLZKEYLPSG.

Our mission is to deliver aesthetically pleasing, high-quality and affordable peripherals and accessories to satisfied customers. We do that by creating products that are both innovative and practical but most important easy-to-use.

If you have any questions, feedback, or just want to say hi, please reach out to us at techsupport@macally.com or on any one of our social media channels.

Don't forget to share your setup with us using [#macally](#) and follow us for to get exclusive offers.



MacallyUSA



With Love From Southern California,
Macally


PACKAGE CONTENTS

- Keyboard
- USB-C to USB-A adapter (attached to the cable)
- User's Guide

SYSTEM REQUIREMENTS

- Mac OS X 10.6 to 14.0 and above; iOS and iPadOS.
- Laptop or desktop with an available USB-A or USB-C port.

HARDWARE BASICS

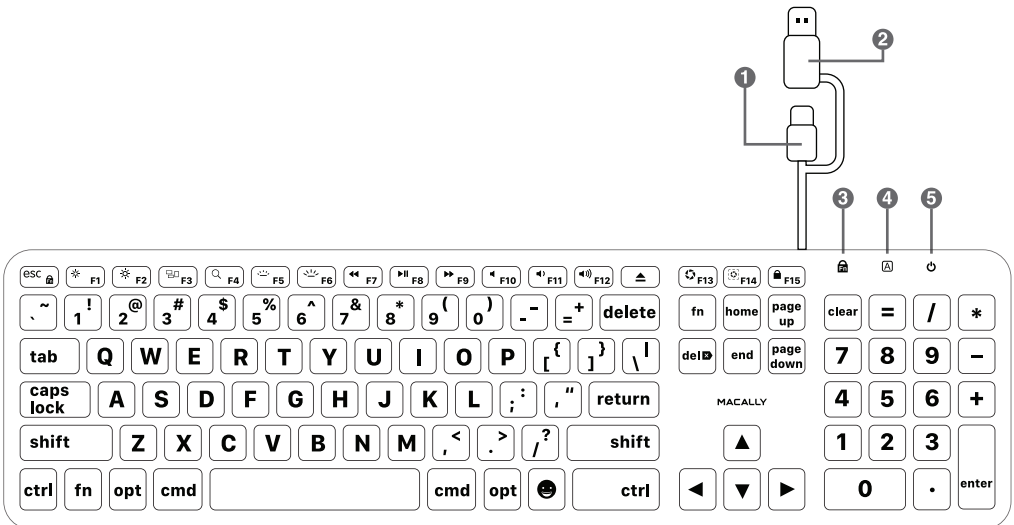


1. USB-C connector.
2. USB-C to USB-A adapter.
(converts the USB-C connector to a USB-A connector)
3. FN Lock LED

The FN Lock (function lock) LED is off by default indicating that the keyboard is in shortcut mode. In shortcut mode, the shortcuts printed on the top F-row can be utilized by simply pressing and releasing each key as needed. To utilize a function command such as F1 you will need to hold down the fn key followed by the F1 key to perform the function. You can switch the keyboard to Function Mode by pressing fn+esc which will then illuminate the function lock mode LED.

4. Caps Lock LED
5. Power LED

INSTALLATION INSTRUCTIONS

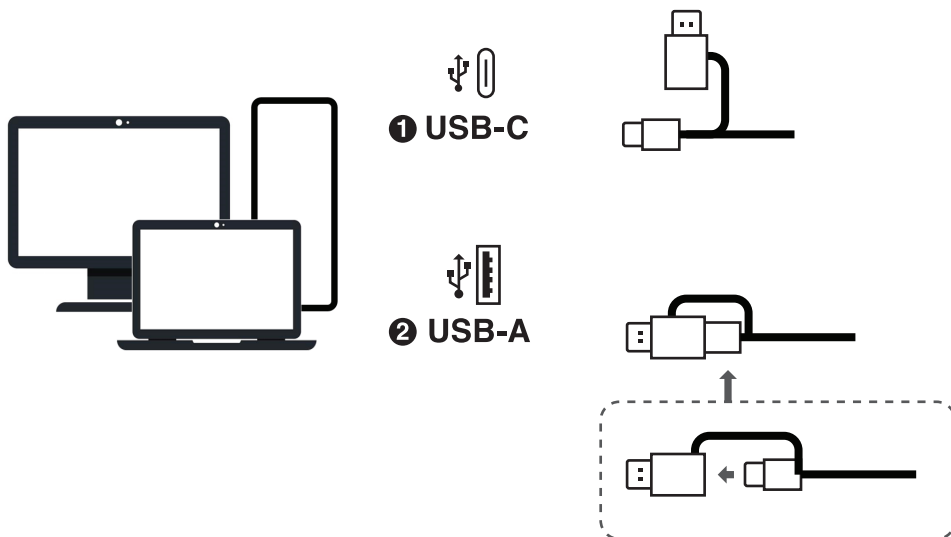

1. USB-C systems:

Insert the keyboards USB-C cable into any available USB-C port on your desktop, laptop or mobile device.

2. USB-A systems:

Fully insert the keyboards USB-C cable into the USB-C to USB-A adapter then insert the USB-A plug into any available USB-A port on your desktop, laptop or mobile device.

NOTE

Should you need to expose the USB-C cable down the road (future system upgrades) simply pull off the USB-A adapter to expose the USB-C connector.


KEYBOARD SETUP ASSISTANT

When you connect a keyboard that is not immediately recognized, the macOS Keyboard Setup Assistant automatically opens so that you can specify the keyboard type. Please follow the onscreen instructions when prompted.


If the Keyboard Setup Assistant did not popup and you are having issues with keys not responding or typing letters other than what's printed on the them you will need to launch the setup assistant manually by doing the following:

1. Open your System Settings or System Preferences.
2. Select Keyboard, then look for and click "Change Keyboard Type".
3. When you see the Keyboard Setup Assistant window, click Continue and follow onscreen instructions.


STEP1: Press the Z key

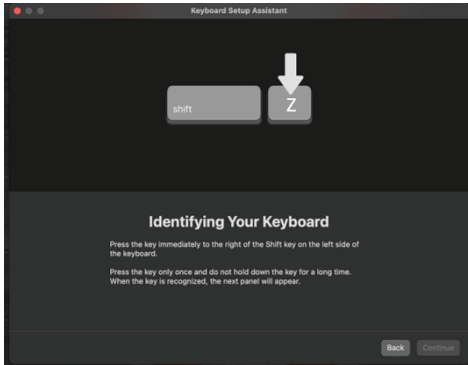

STEP2: Press the ? key

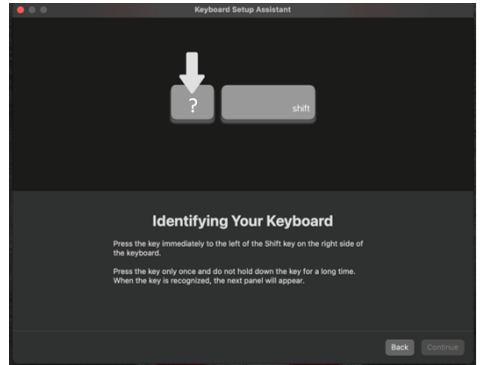

STEP3: Select your keyboard type (ANSI)

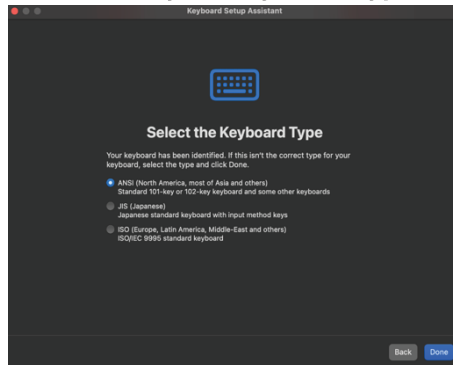


TOP F-ROW SHORTCUTS

The keyboards top F-row is defaulted to boot up under shortcut mode (small icons printed on the F-row keys) such as play, pause, volume controls, etc.

NOTE

You can switch the F-row from shortcuts to functions F1-F12 at any time by pressing `fn+esc` which will then illuminate the FN lock LED indicator in white. When switched, you can still utilize the shortcuts by holding down the `fn` key followed by the shortcut you would like to perform. You can always switch the keyboard back to shortcut mode by pressing `fn+esc` again.

Below is a table of what each shortcut does.

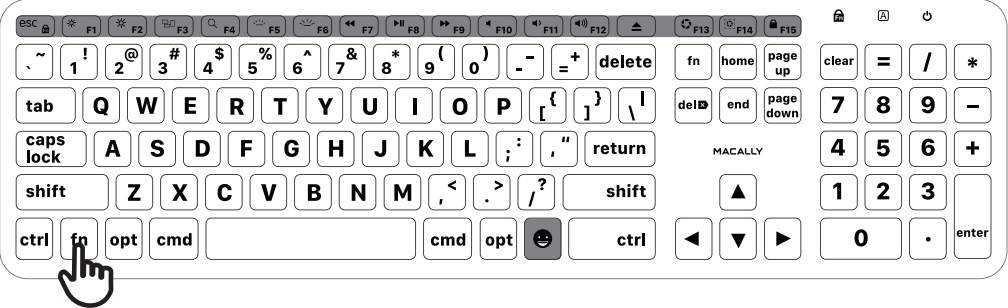

Fn+esc	Switches the keyboard from shortcut mode to function mode as described in the above note.
F1	Decreases the brightness level on the screen. Please note that not all external monitors support this function.
F2	Increases the brightness level on the screen. Please note that not all external monitors support this function.
F3	Mission control.
F4	Spotlight search.
F5	Decreases the keyboards backlight brightness. Decreasing all the way down will turn the backlight off.
F6	Increases the keyboards backlight brightness (3 levels).
F7	Back/Previous track.
F8	Play/Pause.
F9	Forward/Next track.
F10	Mute.
F11	Volume down.
F12	Volume up.
Eject	Eject. Self-dependant and does not require you to hold down the fn key or fn lock.
F13	Screenshot of your entire screen.
F14	Select a portion of your screen to capture.
F15	Puts your laptop/computer into sleep mode.
Emoji	Launches an emoji keyboard shortcut. Self-dependant and does not require you to hold down the fn key or fn lock.

NOTE

All standard function keys (F1-F15) have a special function defined by the operating system, or by a currently running program.

SAFETY INSTRUCTIONS

Please read the following carefully. Incorrect use of this product may result in reduced performance, permanent damage and void your warranty.

- Keep this device away from liquid, humidity and moisture.
- Operate this device only within the specific temperature range of 0°C (32° F) to 5°C to 40°C (104° F)
- Please refrain from taking the device apart. Doing so will void your warranty.
- Do not dispose this product in the garbage. Take it to your local recycling center.

SPECIFICATIONS

Number of keys	107
Switches	Scissor-key
Keyboard interface	USB-A & USB-C
Backlight levels	3

Tech support

Tech support hours are from 9:00 AM to 5:00 PM Monday through Friday (PST).

- E-Mail: techsupport@macally.com
- Phone: (909) 230-6888

FCC STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: *This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: .*

- Reorient or relocate the receiving antenna.*
- Increase the separation between the equipment and receiver.*
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*
- Consult the dealer or an experienced radio/TV technician for help.*

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Warranty

Macally Peripherals warrants that this product will be free from defects in title, materials and manufacturing workmanship for one year in North America from the date of the purchase. If the product is found to be defective then, as your sole remedy and as the manufacturer's only obligation, Macally will repair or replace the product. This warranty is exclusive and is limited to the product that this user's guide came with. This warranty shall not apply to products that have been subjected to abuse, misuse, abnormal electrical or environmental conditions, or any condition other than what can be considered normal use. The liability of Macally Peripherals arising from this warranty and sale shall be limited to a refund of the purchase price. In no event shall Macally Peripherals be liable for costs of procurement of substitute products or services, or for any lost profits, or for any consequential, incidental, direct or indirect damages, however caused and on any theory of liability, arising from this warranty and sale. These limitations shall apply notwithstanding any failure of essential purpose of any limited remedy.