




What's Included

- ☐ 1 x DH5 Monitor
- ☐ 1 x AC Adapter
- ☐ 1 x Camera Shoe Mount
- ☐ 1 x Screen Wipe
- ☐ 1 x Screen Protection Film
- ☐ 1 x Sunhood
- ☐ 1 x USB Drive
- ☐ 1 x Canon E6 Battery Plate
- ☐ 1 x Sony L Series Battery Plate

CHECKED BY

ikan

Getting Started

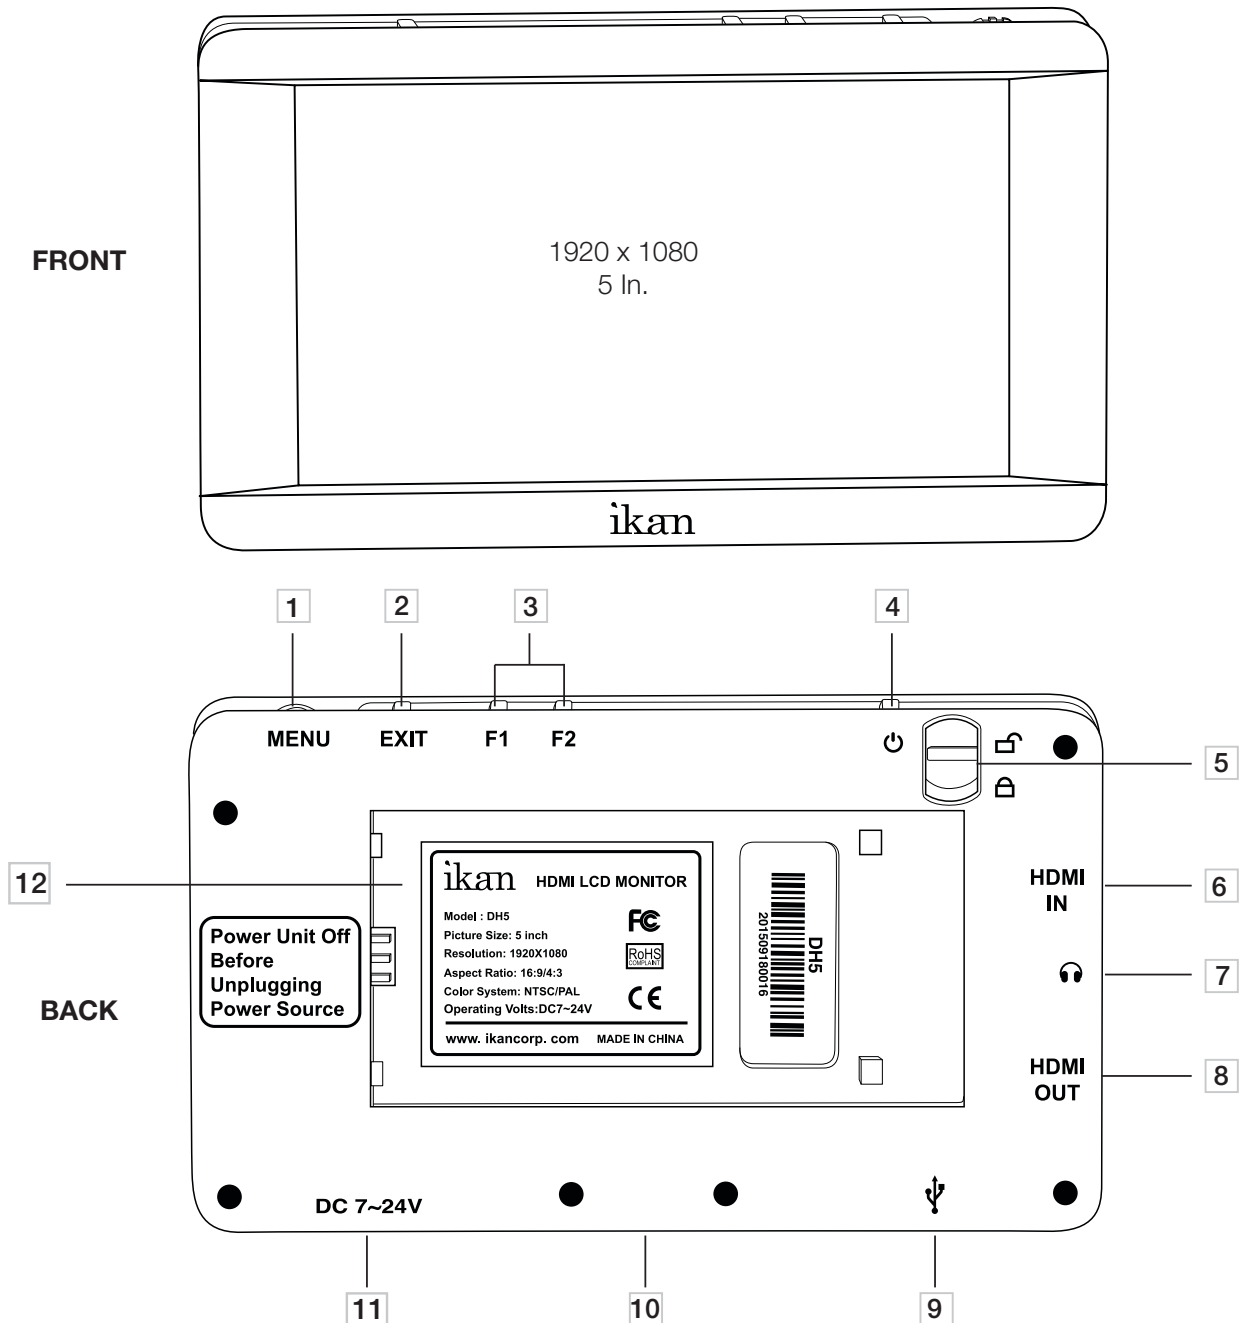

1 **Menu Button - Scroll Wheel**
Used to enter and navigate the menu.

2 **Exit / Aspect**
Used to exit the menu.

3 **Function Buttons**
Functions can be selected in the menu

4 **Power Button**
Power ON/OFF

5 **Battery Plate Lock**
Locks Battery Plate

6 **HDMI Input Terminal**

7 **3.5mm Headphone Output**

8 **HDMI Output Terminal**

9 **USB Connector**
Used for Software Updates

10 **1/4"-20 Threaded Insert**

11 **DC 7-24V Power Terminal**
Standard DC Connection

12 **DV Battery Plate Slot**
Used for mounting DV Battery plate

Configuration of Setting Menus

Guides	Toggle between the following: 80%, 90%, 15:9, 4:3, 1.5:1, 2:1, 2.35:1
Crosshair	Activates Crosshair on center of screen.
Grids	Activates grid on the screen to assist with framing.
Video Config	Brightness: 0-100 Contrast: 0-100 Chroma: 0-100 Sharpness: 0-100 Tint: 0-100
Color Temp	5600K, 6500K, 9300K, Manual
Backlight	Allows user to fine tune the intensity of the LCD Panel's backlight.
Aspect	Allows user to change the aspect ratio of the image.
System Config	OSD - Language: Choose between English & Chinese for OSD. OSD - Duration: Choose how long the menu stays active without activity. OSD - Transparency: Choose from low, medium, high, or off. MENU Setup - Allows 5 users to save menu settings. System Reset - Reset Settings to factory defaults.
Power Mode	Power ON - Monitor powers on automatically when power is applied. Power OFF - Power button needs to be pressed in order to turn on the monitor. Keep Last - Keep last settings Low Battery Alarm - Warns the user when battery is low.

Function Set Up 1-8	Displays a crosshair on the center of the screen.
Guides	
Crosshair	
Peaking	The DH5 is equipped with Monochrome Peaking features, which highlight the desired focus area in a bright, red outline. The operator adjusts the focus control until the red indicator outlines on the desired area are razor sharp, indicating optimal focus. For best results, be sure object is properly exposed.
Underscan	
DSLR	The DSLR Scaling function will allow users to extend their DSLR camera's HDMI Video Output any option of four; Normal 3:2, 16:9, or Full Screen. Convenience Made simple.
Scaling	
Zooming	
Check Field	
HV Delay	Toggles between the Blue only, Red only, Green only, & Mono Modes. This is to help calibrate the image.
Grids	
False Color	This function displays the blanking portion of the incoming signal.
Zebra	Activates grid on screen to assist with framing.
Audio Wave	
Clip Guides	This feature utilizes a full spectrum of assigned color indicators, ensuring flawless shot exposure. Under/Over luminance warnings enable the user to get the desired quality every time.
Histogram	Shows a black & white pattern over the overexposed areas of the video.
5DII Rec.	Displays Audio Stereo Levels.
Firmware Version	
Information	The DH5 offers adjustable upper Clip Guide levels to accurately display overexposed images in any shooting condition. The operator simply assigns the upper IRE to their preference and any exposure over the set IRE limit will flash in a vivid purple, indicating only the over exposed area.
Update (USB)	A graphical representation of the pixels exposed in your image. The left side of the graph represents the blacks or shadows, the right side represents the highlights or bright areas and the middle section is mid-tones. How high the peaks reach represent the number of pixels in that particular tone. This tool helps you get proper exposure.
	Displays currently installed firmware.
	Used to update firmware when a USB containing update file is inserted.

Specifications

Aspect Ratio	16 x 9	Outputs	HDMI
Backlight	LED	Pixel Pitch	0.01925x0.05775 mm
Brightness	450 cd/m2	Power Consumption	6W
Build Material	Heavy Duty Plastic	Resolution	1920x1080
Color Depth	16.7 Millions	Response Time	20ms
Color System	PAL/NTSC/SECAM (Auto-	Screen Size	5 In.
Contrast Ratio	Detected)	Shipping Dimensions	3 x 14.75 x 7.75 In.
Dimensions	5.5 x 3.2 x 0.7 In.	Shipping Weight	2 lbs
Input Voltage	DC 7V - 24V	Viewing Angle	160° Horizontal / 160° Vertical
Inputs	HDMI	Weight	0.2 lbs
Operating Temperature	0°C~50° (32°F~122°F)		

Supported Video Signals

HDMI	720x480i & 720x480p @ 59.94, 60 Hz
	720x576i & 720x576p @ 50 Hz
	1280x720p @ 50, 59.94, 60 Hz
	1920x1080i @ 50, 59.94, 60 Hz
	1920x1080psf @ 24, 25, 29.94, 30, 50, 59.94, 60 Hz
	1920x1080p @ 23.97, 24, 25, 29.94, 30, 50, 59.94, 60 Hz

Optional Accessories

MOUNTS

MA207	7 In. Articulating Arm
MA211	11 In. Articulating Arm
MA211-R	11 In. Articulating Arm w/ Single Rod Mount

BATTERY PLATES

BP5-C	Canon 900 Battery Plate
BP5-E6	Canon LP-E6+ Battery Plate
BP5-P	Panasonic D54 Battery
BP5-S	Sony L Series Battery Plate
BP5-N	Nikon EN-EL15 Battery Plate
BP5-PG6	Panasonic G6 Battery Plate
BP5-SU	Sony BP-U Series Battery Plate

Learn More

More dynamic information at official website: www.ikancorp.com

Support

Contact email: support@ikancorp.com

CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period is expired.

Free Service will not be Provided in the Following Situations:(*Even if the product is still within the warranty period.)

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors, etc.