

SMART PHONE 35MM AND 120MM FILM DIGITIZER USER MANUAL



THANK YOU FOR CHOOSING VELLO


The Vello PNDS-120 makes it easy to digitize 35mm and 120mm film strips with your smartphone. This all-in-one kit features a USB-powered LED light source, phone clamp, film strip holders, and adjustable image alignment so you can accurately capture, edit, and upload your photos, right from your device. The included remote trigger allows you to wirelessly snap photos without having to touch your setup.

PRECAUTIONS


- Please read and follow all the instructions in this manual.
- Do not disassemble or perform any unauthorized modifications. Use only with the compatible devices specified in this manual.
- Keep this device away from water and extreme humidity and store it in a cool and dry place.
- Do not operate in conditions with extreme heat or cold.
- Do not operate in the presence of flammable gases or vapors.
- Keep out of reach of children. This device contains small parts which may pose a choking hazard.
- All images are for illustrative purposes only.

OVERVIEW

1. Height post
2. Height adjustment knob
3. Phone clamp
4. Locking knob
5. 1/4-20 accessory screw
6. Base
7. Sliding rail
8. Remote trigger with battery
9. LED carrier
10. USB Type-C power port
11. Slotted screw
12. Rubber feet
13. Slotted tool

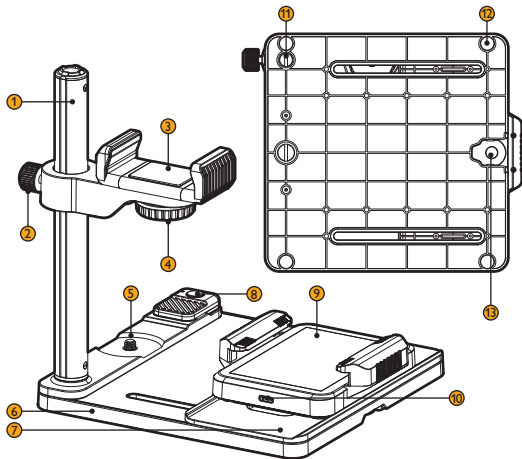


- 14. 120mm film holder
- 15. 35mm film holder
- 16. USB Type-C to Type-A power control cable
- 17. Power button
- 18. Brightness level buttons (+/-)

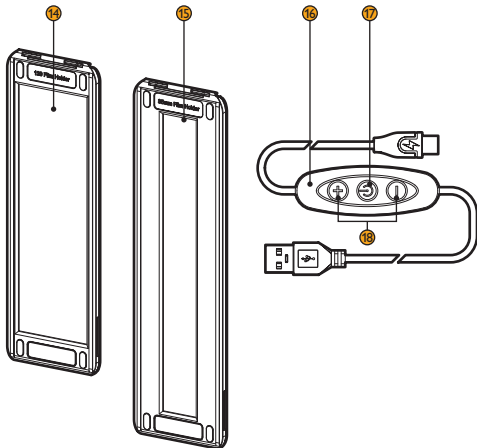


ASSEMBLING THE DIGITIZER


1. Insert the post into the base and use the slotted tool to secure by screwing the slotted screw into the base.

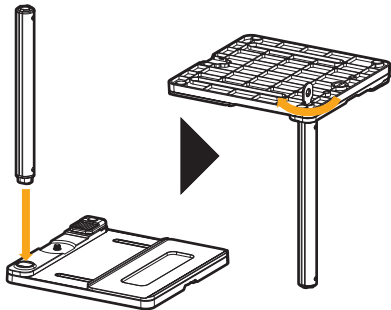


2. Loosen the phone clamp's height adjustment knob and slide it over the post with the clamp facing upward. Tighten until secure.

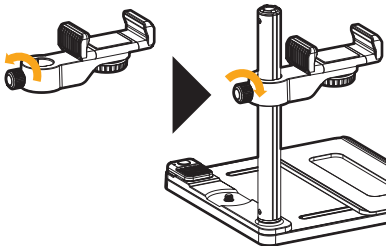

3. Pull open the spring-loaded phone clamp and place your phone inside the clamp.

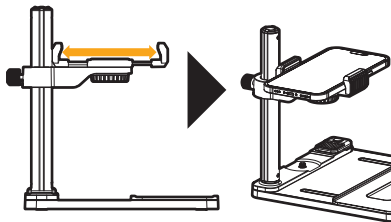

4. Place the LED carrier into the sliding rail. Plug the power control cable into a USB power source (not included) and the USB Type-C end into the LED carrier. Press the power button to turn on the LED and use the +/- buttons to adjust the brightness level.

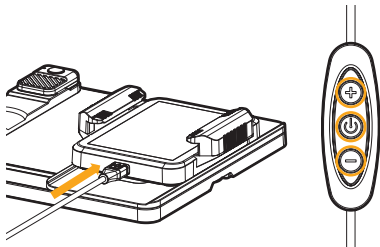


5. Place the film into the appropriate 35mm or 120mm holder and slide it into LED carrier.

Warning! To avoid damaging the film, do not leave it in the LED carrier for long periods.


6. Adjust the LED carrier vertically and horizontally as well as the adjustable phone height to best align the image with your phone's screen. Zoom to maximize if needed. Results may vary based on the device used.

Warning! When adjusting the phone's height, always support the clamp with one hand.

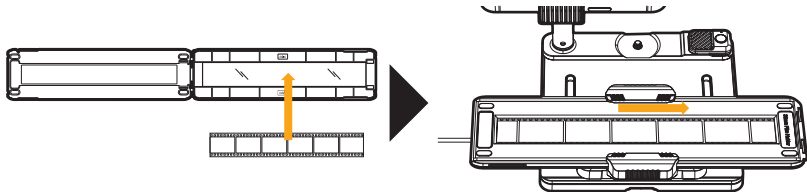



REMOTE BATTERY

Remove the remote's battery cover and pull out the protective plastic tab. Press the CR2025 battery into the battery compartment with the "+" side facing upward and reinsert the battery cover until it clicks back into place.

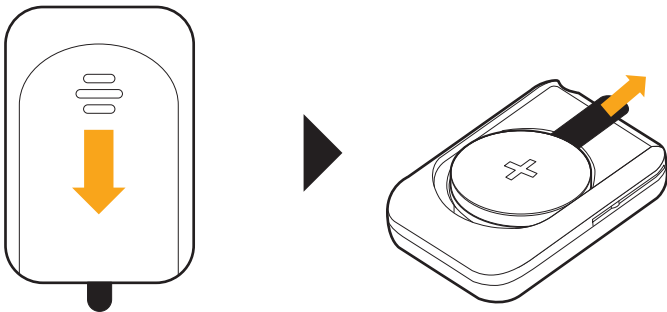


PAIRING THE REMOTE WITH YOUR SMARTPHONE

1. Enter your phone's settings and turn on Bluetooth.
2. Press and hold the remote's shutter release button for about 3 seconds until the LED indicator lights up and blinks.

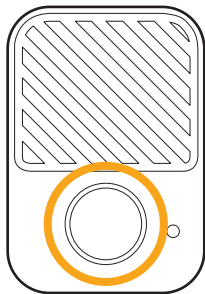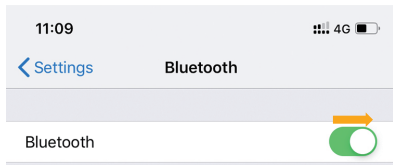

3. On your phone, look for the device named HG-BT1 and select it to begin pairing. A message will appear on your screen—press the “Pair” button to connect. In your device list you should see that the HG-BT1 is connected.

Note: if the remote is paired with another phone, disconnect the HG-BT1 and turn off that phone’s Bluetooth.

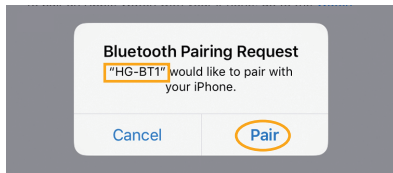

SPECIFICATIONS

Accepted film sizes	35mm, 120mm
Clamp range	2 to 3.5 in. (5 to 9 cm)
Brightness Levels	11
Power connection	USB Type-C
Remote Power	CR2025 Lithium coin battery
Cable length	59 in. (1.5 m)
Dimensions (H × W × D)	7.7 × 6.5 × 6.5 in. (19.5 × 16.5 × 16.5 cm)
Weight	1.9 lb. (0.87 kg)

ONE-YEAR LIMITED WARRANTY

This VELLO product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of one (1) year from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function.

This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Vello Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Vello along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.vellogear.com or call Customer Service at 212-594-2353.

Product warranty provided by the Gradus Group.

www.gradusgroup.com

VELLO is a registered trademark of the Gradus Group.

© 2024 Gradus Group LLC. All Rights Reserved.



www.vellogear.com