

DURACELL®

G-SOLAR PANEL

USER MANUAL




INCLUDED IN THE PACKAGE

1. Foldable Solar Panel
(100W)



2. G-Solar Cable, 30A Anderson to XT60-F (0.5M)

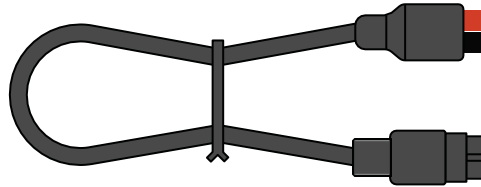

DETAILS



Solar
Panel



POWER350



POWER800

SOLAR CHARGER

SOLAR CHARGER

CARE AND MAINTENANCE

- To clean the solar panel, use a damp cloth to gently wipe the surface. Do not use any chemicals or corrosive products. Do not immerse in water. A soft brush can be used to remove any loose dirt.
- Do not drop or bend it.
- Do not immerse it in water or any other liquid.
- Do not use or store it near fire or heat sources.
- Do not disassemble it.
- Do not connect more than 2 solar panels in series or parallel connections.



FREQUENTLY ASKED QUESTIONS



1. Which portable power stations are compatible with my G-Solar Panel?
The Duracell G-Solar Panel pairs with the Duracell G350 and G800 Portable Power Stations. This solar panel does not pair with the M-Series portable charging hubs. To use the G-Solar Panel with Duracell Power-Series Power Stations, please contact Duracell Consumer Relations at 800-551-2355.
2. How do I get the most power out of my G-Solar Panel?
For best results, use it on a sunny day with a clear sky. Continuously realign your solar panel so that it is pointing directly at the sun. Keep the solar panel's surface clean. Avoid scratches on the solar panel surface.
3. Is my G-Solar Panel waterproof?
Duracell solar panels can withstand water splashes and light rain when set up with the cell surface up. Backside fabrics are not waterproof and contact with water should be avoided. Do not leave your solar panels in the rain. Do not immerse your solar panel in water.

For more information regarding our product line, customer service and warranty information please contact Duracell Consumer Relations at 1-800-551-2355 or visit our website: duracell.com

LIMITED WARRANTY INFORMATION

Duracell provides a limited warranty that covers defects in materials and workmanship for the Duracell Portable Power Stations, Portable Charging Hubs, and Solar Panels ("Products") under normal use for a period of two (2) years from the date of purchase by the original end-user when any of the Products are purchased from an authorized seller that is located within the United States and any of the Products are used within the United States. Keep a copy of your purchase receipt as proof of purchase. The limited warranty of any of the Products is limited only to the units of the Products when used in accordance with the operating instructions and the system environment. This limited warranty does not cover: (1) damaged caused by accident, abuse, misuse, or external causes; (2) damage caused by unauthorized servicing of any of the Products; or (3) normal wear and tear. Duracell's liability under this warranty is limited to the replacement or repair of the Product.

The original end-user acknowledges and agrees that:

- Duracell is not liable for damage or loss resulting from the use of any Products or for any claim from a third party.
- Duracell is not liable for problems with any electronic devices or home appliances or any other hardware arising from the use of any Products, the suitability of any of the Products for specific hardware, software, or peripherals, operating conflicts with other installed software, data loss, or other accidental or unavoidable damages.
- Duracell is not liable for incidental, consequential, indirect, or financial damages, lost products, or claims from third parties resulting from the use of any of the Products.

How to obtain warranty assistance: Contact Duracell Consumer Relations at 1.800.551.2355. Provide the purchase receipt for the Product.

SPECIFICATIONS

MODEL	DSP100
Rated Power	100Wp
Cell Efficiency	≥22%
Max Power Voltage	20V ±10%
Max Power Current	5A±10%
Open Circuit Voltage	24V ±10%
Short Circuit Current	5.44A ±10%
Operating Temperature Range	-10°C~65 °C (14°F~149 °F)
Dimensions (unfolded/folded)	536*1228*25/536*608*38mm
Weight	3.96Kg/8.73lb

All technical data at standard test conditions: AM=1.5, E=1000W/m², Tc=25 °C at 200ms exposure of Flash Test, with fresh product.