




X9RBBLERGCB



Multi-Device Ergonomic Wireless 2.4 BT Wireless Backlit Keyboard and Mouse Combo

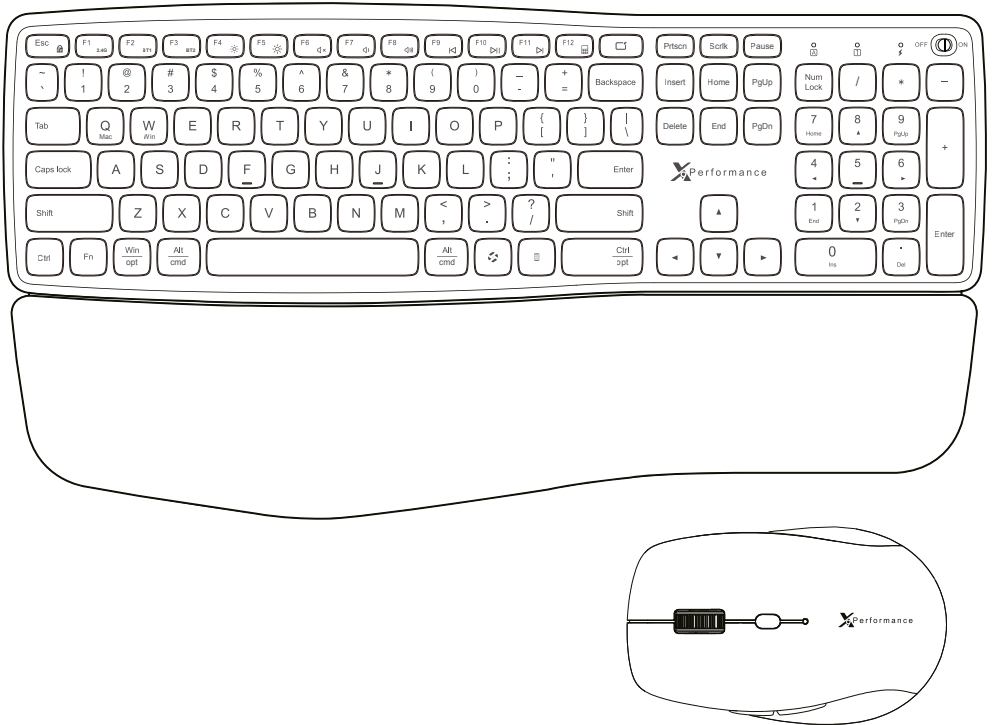

Welcome to the X9 Performance family and thank you for purchasing the X9RBBLERGCB seeries.

Our mission is to deliver aesthetically pleasing, high-quality and affordable peripherals and accessories to satisfied customers. We do that by creating products that are both innovative and practical but most important easy-to-use.

If you have any questions, feedback, or just want to say hi, please reach out to us at techsupport@X9Performance.com.

With Love From Southern California,
X9 Performance

PACKAGE CONTENTS


- Keyboard
- Mouse
- RF Dongle (located under the mouse)
- USB-C charging cable
- User's Manual

SYSTEM REQUIREMENTS

- BT Wireless enabled computer and laptop
- Computer or laptop with a free USB-A port for wireless RF dongle usage.
- Available USB-A port or USB-A wall charger adapter for charging the keyboard and mouse.

HARDWARE BASICS

Keyboard

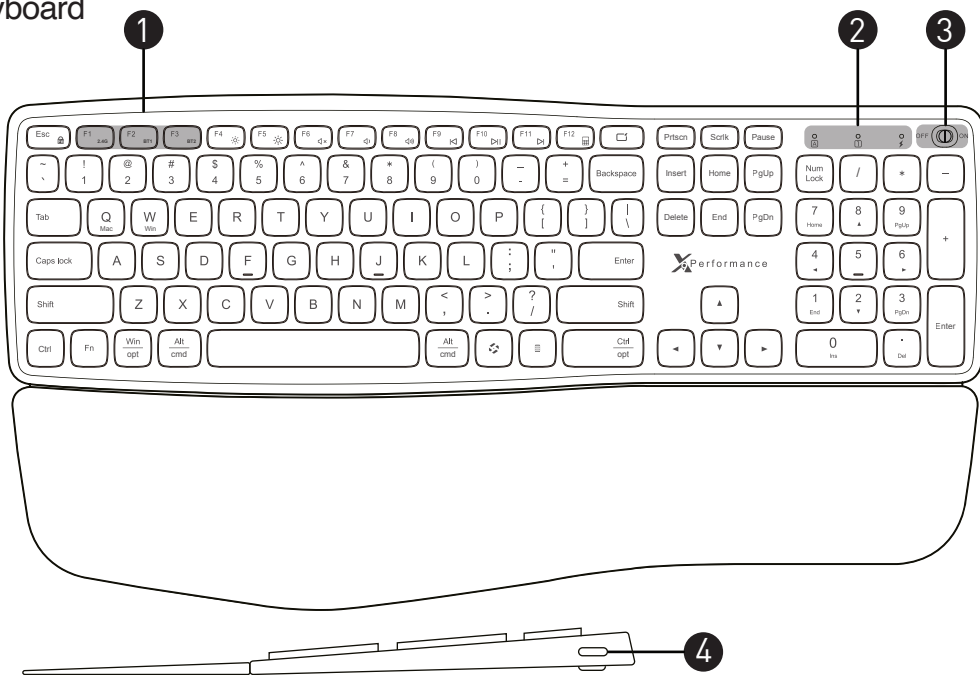

1.Mode switch buttons

- RF: White LED; Synced: Off
- B1: White LED; Paired: Off
- B2: White LED; Paired: Off


2. LED Indicators

- Caps Lock: White if active
- Num Lock: White is active (Windows only)
- Charging LED
- Charging: Blue LED
- Fully Charged: Off
- Low Battery: White LED blinks once per second

3.Off/On Switch

4.USB-C Charging port

Mouse

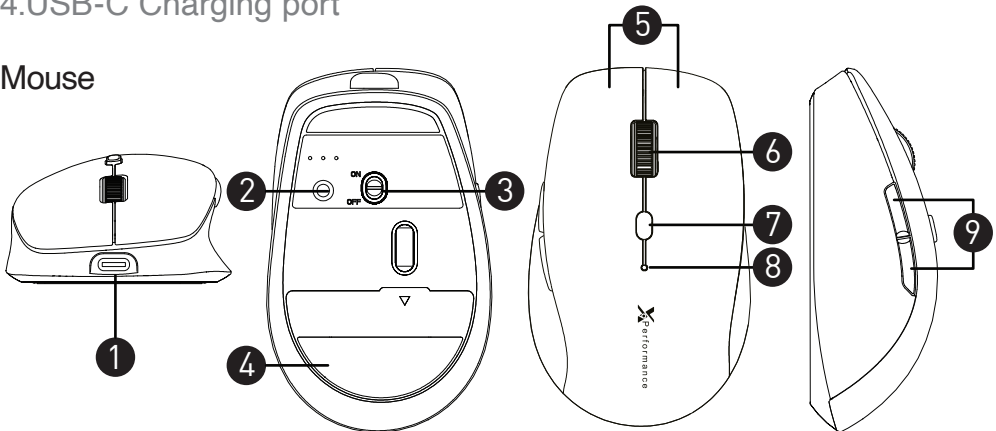

1.USB-C charging port

2.Pair mode/mode switch button

- RF: White; Synced: Off
- B1: White; Paired: Off
- B2: White; Paired: Off

3.On/Off

4.RF/Dongle Compartment

5.Left and right click

6.Scroll Wheel

7.DPI Button

8.Charging LED

- Charging: Red
- Fully Charged: Green

9.Back and forward button (Web only)

RF INSTRUCTIONS (PC)


Keyboard

1. Ensure the keyboard is fully charged and turned on.
2. Remove the RF receiver dongle at the bottom of the mouse
3. Press F1 one time and let go.
4. Plug the RF receiver dongle into your computer. The keyboard is ready to use.

Mouse

1. Ensure the mouse is fully charged and turned on.
2. Since the RF receiver dongle is already plugged into your computer, it should automatically work.

BT WIRELESS INSTRUCTIONS FOR PC

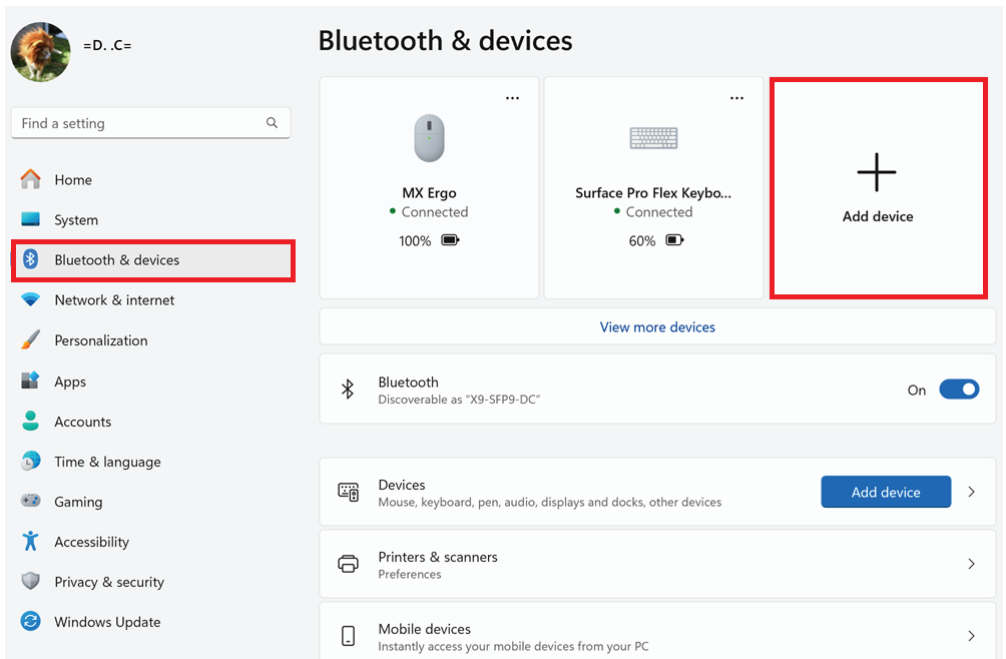

Keyboard

NOTE

We will use B1 as an example.

1. Open Settings on your PC.
2. Click BT Wireless.
3. Select Add Device.
4. Press the F2 button once, then press and hold it for 3 seconds.
5. When you see the X9RBBLERG keyboard, click it to connect.

To pair the keyboard to a second device, all you have to do is follow the same steps above for the F3 key on the keyboard.

Mouse


NOTE

We will use B1 as an example.

1. Stay in your PC's BT wireless Settings
2. Click "Add Device".
3. Press the Pair mode/mode switch button on the bottom of the mouse until the white light flashes on B1, then hold it for 3 seconds.
4. Click Connect.

To pair the mouse to a second device, you must follow the same steps above except press the Pair mode/mode switch button until the white light flashes on B2.

BT WIRELESS INSTRUCTIONS FOR MAC

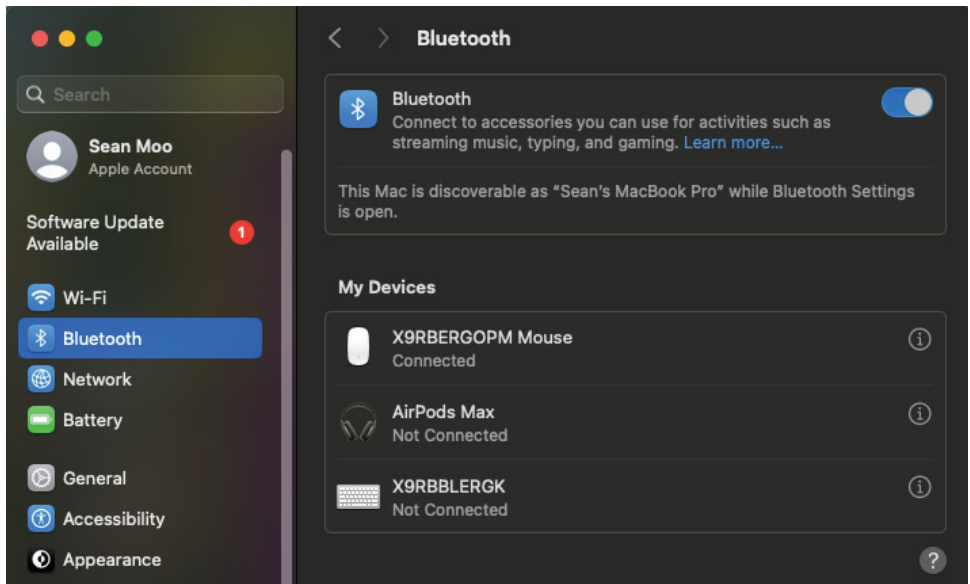

NOTE

We will use B1 as an example. If you are using a Mac, you will also need a wired keyboard before you can pair this keyboard.

1. Open System Settings on your Mac.
2. Click BT Setting.
3. Press the F2 button once, then press and hold it for 3 seconds.
4. When you see the X9RBBLERG keyboard, click it to connect.

Mouse

NOTE

We will use B1 as an example. If you are using a Mac, you will also need a wired mouse before you can pair this mouse.


1. Stay in System Settings.
2. Press the Pair mode/mode switch button on the bottom of the mouse until the white light flashes on B1, then hold it for 3 seconds.
3. Click Connect.

Keyboard Setup Assistance (Mac User's)


Once pairing is done, a "keyboard setup assistance" screen may pop up, asking you to help identify your new keyboard. This is a built-in Apple procedure that helps the OS identify the current layout of your new keyboard. When prompted, do the following:

1. Click continue.
2. Press and release the z key.
3. Press and release the ? key.
4. Select ANSI at the end (US users).


STEP1: Press the Z key

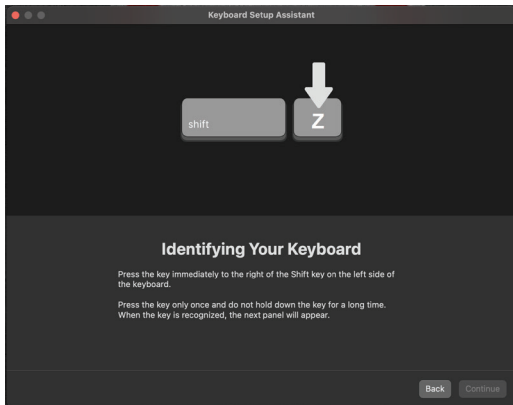

STEP2: Press the ? key

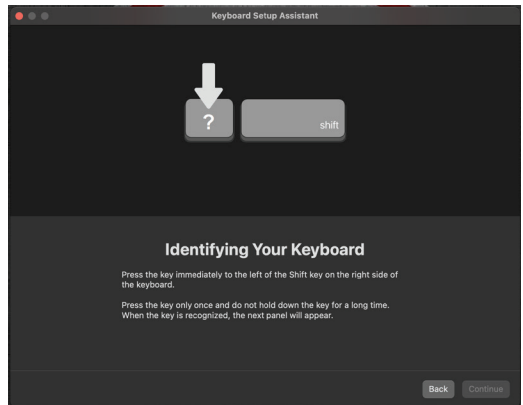

STEP2: Select your keyboard type (ANSI)

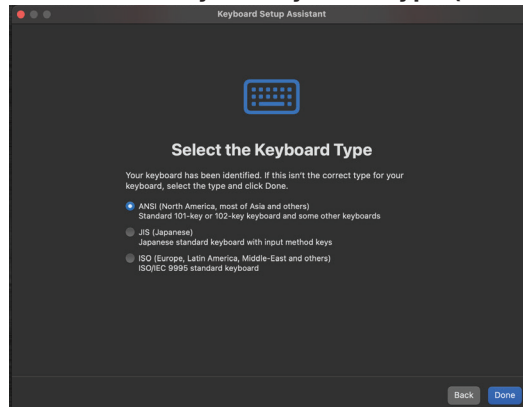

SWITCHING KEYBOARD OS

Mac Mode: Hold the Fn key, then press Q.

PC Mode: Hold the Fn key, then press W.

RF DONGLE RESYNCING INSTRUCTIONS

Keyboard

1. Unplug the RF dongle from your computer.
2. Switch the keyboard to RF mode (the top RF light will blink slowly).
3. Press and hold the Esc key and the = for 3 seconds until the RF light blinks rapidly.
4. Plug the RF dongle back into your computer and wait for the light to go off.

Mouse

1. Turn on the mouse.
2. Press and hold the right-left button and scroll wheel for 3 seconds.
3. When the white light flashes on the bottom of the mouse, plug the RF dongle into your computer's USB port.
4. Press the left mouse click again to make the blinking stop.

SWITCHING BETWEEN MULTIPLE DEVICES


Keyboard

Press the F1, F2, and F3 to change devices

RF (F1) – White then off

BT1 (F2) – White then off


BT2 (F3) – White then off



NOTE

Do not hold any of these buttons for 3 seconds long. This will cause you to lose the sync/pairing.

CHARGING THE KEYBOARD & MOUSE

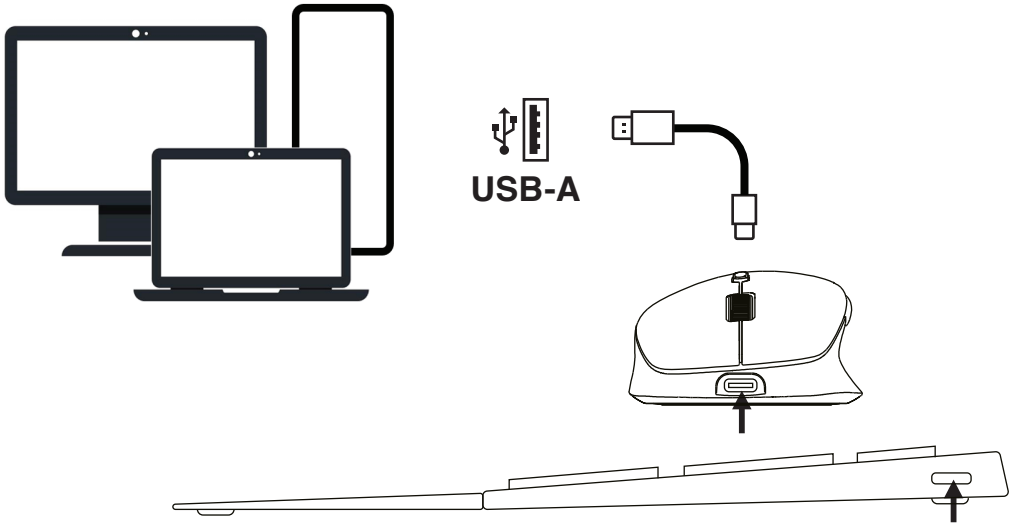

To charge the keyboard and mouse simply plug the USB-A end of the cable provided into any available USB-A port on your compute, laptop or USB wall charger and insert the USB-C end of the cable into the USB-C port located on either of the devices that needs to be charged.

LED charging indicators

Keyboard

- Flashing White: Low battery
- Solid Blue: Charging
- Blue light off: Fully charged

Mouse (LED located on the top of the mouse)

- Flashing red: Low battery
- Solid red: Charging
- Solid green: Fully charged

IMPORTANT

Using the cable only charges the device. It does not convert the mouse or keyboard into a “wired” device.

TOP F-ROW SHORTCUTS

The keyboards top F-row is defaulted to boot up under shortcut mode (white icons printed on the F-row keys) play, pause, cut, copy, etc.

NOTE

You can switch the F-row from shortcuts to functions F1-F12, PrtScn and insert at any time by pressing fn+esc which will then illuminate the FN lock LED indicator in white. When switched, you can still utilize the shortcuts by holding down the fn key followed by the shortcut you would like to perform. You can always switch the keyboard back to shortcut mode by pressing fn+esc again.

Below is a table of what each shortcut does.

Shortcut description

2.4G	Change the Connection to RF Dongle/Receiver
BT1	Change the Connection BT 1
BT2	Change the Connection BT 2
	Decreases the brightness level on the screen. Please note that not all external monitors support this function.
	Increases the brightness level on the screen. Please note that not all external monitors support this function.
	Mute.
	Volume Down
	Volume Up
	Rewind/Previous track
	Pause/Play
	Fast Forward/Next track
	PC: Calculator Mac: No Action
	PC: Minimize all windows Mac: Show the desktop

COMMANDS THAT REQUIRE FN


If the White LED on the Fn key is on, it will be a shortcut mode. If the Fn LED light is off, then you are in function mode.

Fn+ Up Arrow	Brighten the keyboard backlight 3 levels: Off, Dim, and Bright
FN+Down Arrow	Dims the keyboard backlight 3 levels: Bright, Dim, Off
FN+Q	Changes keyboard to Mac operating system
FN+W	Changes keyboard to Windows operating system

SHORTCUTS THAT DOES NOT REQUIRE FN

Minimize	PC: Minimizes all windows.
	Mac: Minimize the selected window.
CoPilot	PC: CoPilot
	Mac: Siri (please refer to the " How to enable Copilot to Siri" page)

HOW TO ENABLE COPILOT TO SIRI (Mac User's Only)

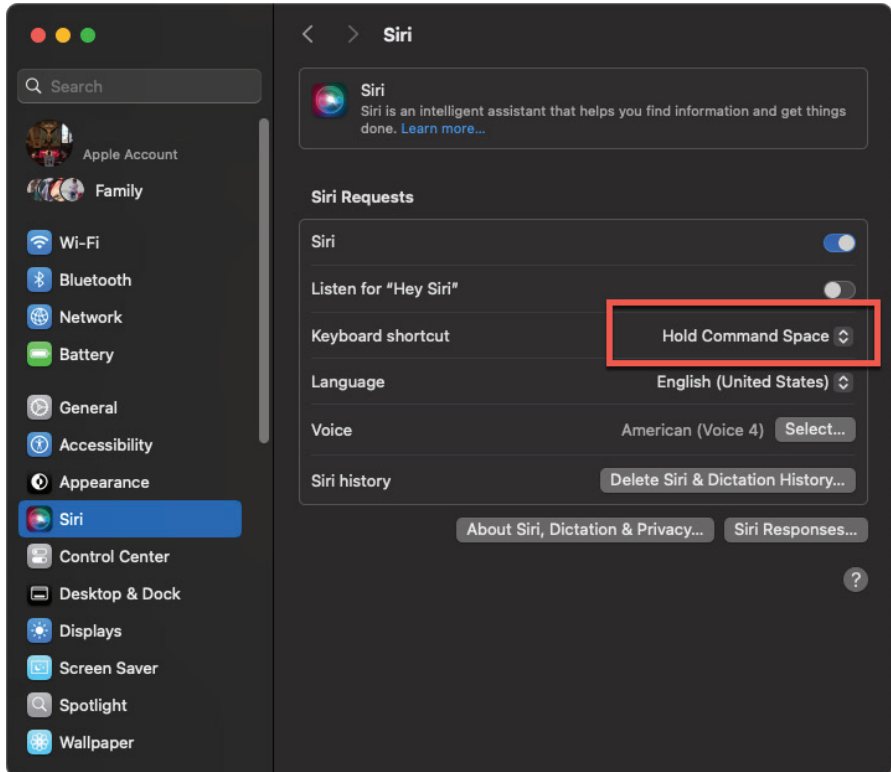

1. Go to system settings
2. Click on Siri
3. Change the shortcut to Hold Command Space.

KEYPAD TROUBLESHOOTING TIPS

Windows Computers

1. Press Num lock (Full-sized keyboard)
2. Press Windows + R > Type On-screen keyboard > Click Options > Check turn on Numeric Keypad > Click Num lock > Close all windows
3. Settings > Accessibility > Keyboard > Disable Mouse Keys
4. Settings > Ease of Accessibility > Mouse > Disable Mouse Keys (Windows 11)
5. Settings > Control Panel > Ease of Access > Make the mouse easier to use > Ensure mouse keys are not checked.
6. Settings > Control Panel > Ease of Access > Make the keyboard easier to use > Ensure mouse keys are not checked.

Mac Computers

1. System Settings > Accessibility > Pointer Control > Find alternate control methods > Disable mouse keys

SAFETY INSTRUCTIONS

Please read the following carefully. Incorrect use of this product may result in reduced performance, permanent damage and void your warranty.

- Keep this device away from liquid, humidity and moisture.
- Operate this device only within the specific temperature range of 0°C (32° F) to 40°C (104° F)
- Please refrain from taking the device apart. Doing so will void your warranty.
- Do not dispose this product in the garbage. Take it to your local recycling center.

SPECIFICATIONS

Keyboard

Battery size	750 mAh
Sleep time without Backlight	30 minutes without use
Sleep time with Backlight	1 minute without use
Charge time	2 hours
Hours of use single charge	5 hours with 3rd level of backlight brightness
RF Dongle/Receiver	2.4 Ghz
BT version	5.0

Mouse

Battery size	500 mAh
Sleep time	30 minutes without
Charge time	2 hours
RF Dongle/Receiver	2.4 Ghz
BT version	5.0

Tech support

Tech support hours are from 9:00 AM to 5:00 PM Monday through Friday (Pacific Standard Time).

Phone: (909) 230-6788

E-mail: techsupport@X9Performance.com

FCC STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: *This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: .*

- Reorient or relocate the receiving antenna.*
- Increase the separation between the equipment and receiver.*
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*
- Consult the dealer or an experienced radio/TV technician for help.*

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Warranty

X9 Performance warrants that this product will be free from defects in title, materials and manufacturing workmanship for one year in North America from the date of the purchase. If the product is found to be defective then, as your sole remedy and as the manufacturer's only obligation, X9 Performance will repair or replace the product. This warranty is exclusive and is limited to the product that this user's guide came with. This warranty shall not apply to products that have been subjected to abuse, misuse, abnormal electrical or environmental conditions, or any condition other than what can be considered normal use. The liability of X9 Performance arising from this warranty and sale shall be limited to a refund of the purchase price. In no event shall X9 Performance be liable for costs of procurement of substitute products or services, or for any lost profits, or for any consequential, incidental, direct or indirect damages, however caused and on any theory of liability, arising from this warranty and sale. These limitations shall apply notwithstanding any failure of essential purpose of any limited remedy.