

MACALLY

UCABLEG2HUBSG



DUAL (USB A + C) SPLIT
BACKLIT KEYBOARD WITH HUB

MACALLY

Welcome to the Macally family and thank you for purchasing the UCABLEG2HUBSG.

Our mission is to deliver aesthetically pleasing, high-quality and affordable peripherals and accessories to satisfied customers. We do that by creating products that are both innovative and practical but most important easy-to-use.

If you have any questions, feedback, or just want to say hi, please reach out to us at techsupport@macally.com or on any one of our social media channels.

Don't forget to share your setup with us using [#macally](#) and follow us for to get exclusive offers.



MacallyUSA



With Love From Southern California,
Macally


Package contents

- Keyboard
- User guide


System Requirements

- Mac OS X and above, iPadOS. and iOS
- Mac, iPad and iPhone with an available USB-A or USB-C port.


Hardware basics

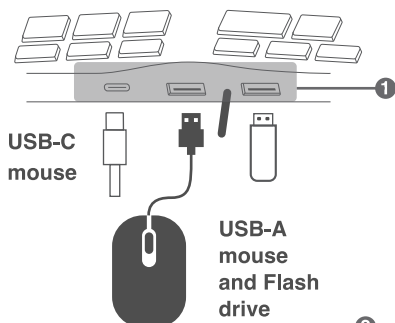

1. USB hub ports
(2 USB-A, 1 USB-C)
2. LED indicators
 - Power (Green)
 - Fn Lock
 - Green is Function Mode
 - Off is Shortcut Mode
 - Caps Lock (Green)
3. USB-A +C connector

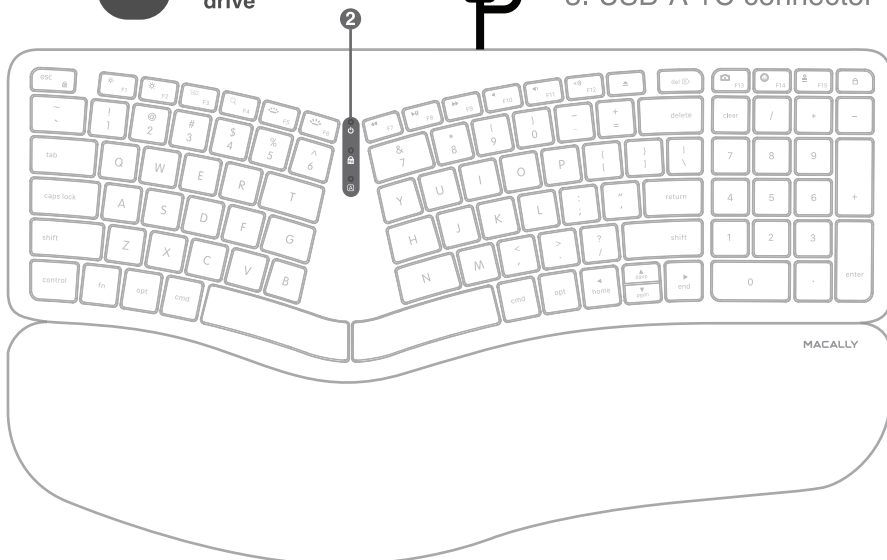

Installation instructions

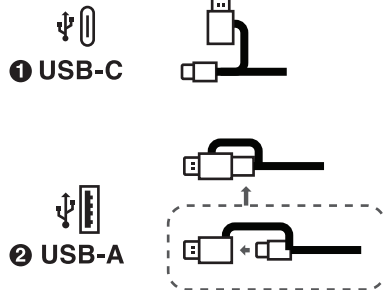

Plug the keyboard's USB-A or USB-C cable into any open USB port on your computer or mobile device.

NOTE

You only need to use the USB-C connector if you have a computer or mobile device with USB-C port. If you only have USB-A ports on your computer, please attach the USB-C plug into the USB-A connector.


Keyboard setup assistant

When you connect a keyboard that is not immediately recognized, the macOS Keyboard Setup Assistant automatically opens so that you can specify the keyboard type. Please follow the onscreen instructions when prompted.


If the Keyboard Setup Assistant did not popup and you are having issues with keys not responding or typing letters other than what's printed on the them you will need to launch the setup assistant manually by doing the following:

1. Open your System Settings or System Preferences.
2. Select Keyboard, then look for and click "Change Keyboard Type".
3. When you see the Keyboard Setup Assistant window, click Continue and follow onscreen instructions.


STEP1: Press the Z key

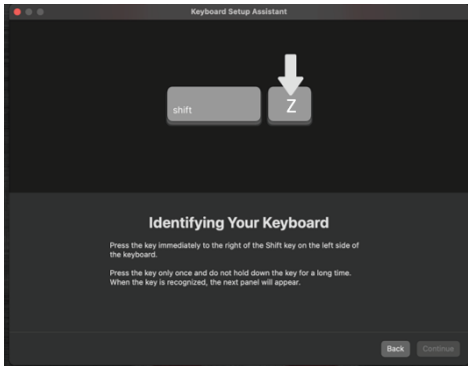

STEP2: Press the ? key

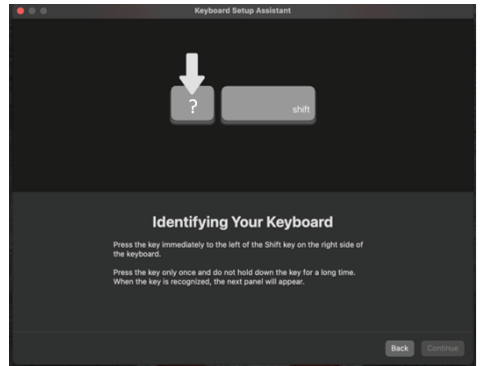

STEP3: Select your keyboard type (ANSI)

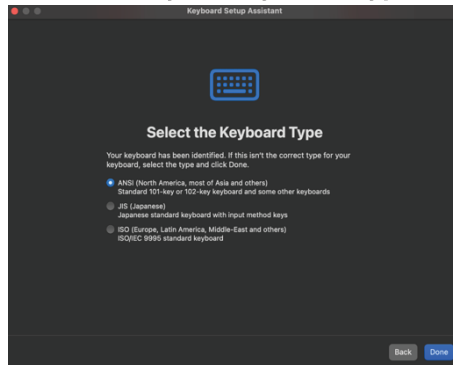

Shortcut and Function Mode

The keyboards top F-row (F1-F15) is defaulted to boot up under shortcut mode (small icons printed on the F-row keys) such as play, pause, volume controls, etc.

NOTE

You can switch the F-row from shortcuts to functions F1-F15 at any time by pressing `fn+esc` which will then illuminate the FN lock LED indicator in green. When switched, you can still utilize the shortcuts by holding down the `fn` key followed by the shortcut you would like to perform. You can always switch the keyboard back to shortcut mode by pressing `fn+esc` again.

Shortcut Description on Top Row

fn + esc	Enable or Disable Functions/Shortcuts
	Computer Screen (Dim)
	Computer Screen (Bright)
	Mission Control
	Spotlight Search
	Keyboard Backlight (Dim)
	Keyboard Backlight (Bright)
	Previous Track (Media Key)
	Pause/Play (Media Key)
	Next Track (Media Keys)
	Mute
	Volume Down
	Volume Up
	Screen Shot
	Emoji Selection
	Force Quit Applications
	Logout/Sleep (Password Screen)

NOTE

All standard function keys (F1-F15) have a special function defined by the operating system, or by a currently running program.

Keypad Troubleshooting (numbers not typing)

Either of the following should enable the keyboards keypad to type numbers should they not work after the initial setup.

- New Mac: System Settings > Accessibility > Pointer Control > Turn Mouse Keys Off
- Old Mac: System Preferences > Accessibility > Mouse and Track pad > Turn Mouse Keys Off
- Shift-Delete

Safety instructions

Please read the following carefully before using this Macally product. Incorrect use of this product may result in reduced performance, permanent damage and void warranty:

1. Do not place this product near a heat source.
2. Operating temperature of -5°C to 40°C. Storage temperature of -5°C to 40°C.
3. Do not place this product near moisture nor liquids.
4. Operate and store at humidity of 20% to 90% (non-condensing)
5. Do not place heavy objects on this product.
6. Do not drop this product.
7. Do not dispose this product in the garbage. Take it to your local recycling center.

Tech support

Tech support hours are from 9:00 AM to 5:00 PM Monday through Friday (Pacific Standard Time).

Phone: (909) 230-6888

E-mail: techsupport@macally.com.

Online: <https://help.macally.com/help>

FCC STATEMENT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: .

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Warranty

Macally Peripherals warrants that this product will be free from defects in title, materials and manufacturing workmanship for one year in North America from the date of the purchase. If the product is found to be defective then, as your sole remedy and as the manufacturer's only obligation, Macally will repair or replace the product. This warranty is exclusive and is limited to the product that this user's guide came with. This warranty shall not apply to products that have been subjected to abuse, misuse, abnormal electrical or environmental conditions, or any condition other than what can be considered normal use. The liability of Macally Peripherals arising from this warranty and sale shall be limited to a refund of the purchase price. In no event shall Macally Peripherals be liable for costs of procurement of substitute products or services, or for any lost profits, or for any consequential, incidental, direct or indirect damages, however caused and on any theory of liability, arising from this warranty and sale. These limitations shall apply notwithstanding any failure of essential purpose of any limited remedy.