


PL-20A LED Panel Light

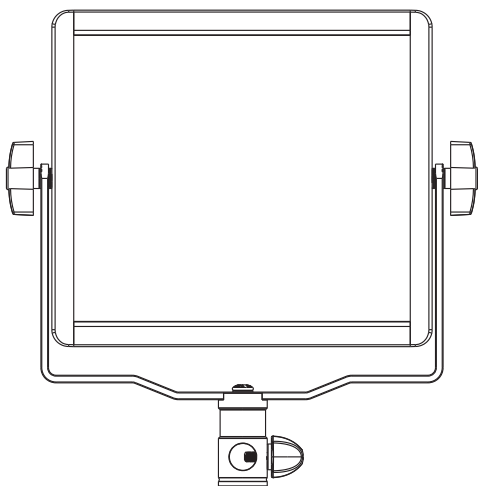

Product Specifications



Model	PL-20A
Power	20W
Color Temperature	3300K- 5600K
Voltage	15-18V
Channel	16 Groups(0 -16)
Group	16 Groups (0 - 9) (A - F)
Net Weight	1000g
Lifetime	30000H
Dimming Range	10%-100%
Battery Supply	7.4V Lithium Battery* 2 (NP- F Series)
Power Supply	5. 5* 2. 5 DC Power Port (15-18V 2-5A)
Product Size	290X290X45mm

Precautions


- 1.This equipment is not used for daily life lighting. Please do not work continuously for 6 hours.
- 2.Wet hands cannot touch the power supply to avoid electric shock.
- 3.The device prohibits children under the age of 12 from operating. Don't stare at glare for a long time.
- 4.It is strictly forbidden to expose to the sun and rain.
- 5.Turn off the switch and use dry or slightly damp cloth when cleaning the LED ring light. No chemical or abrasive is allowed.

Product Specifications

Product Specifications

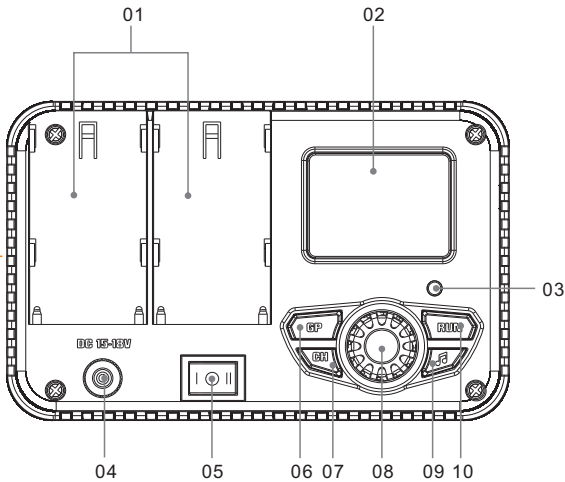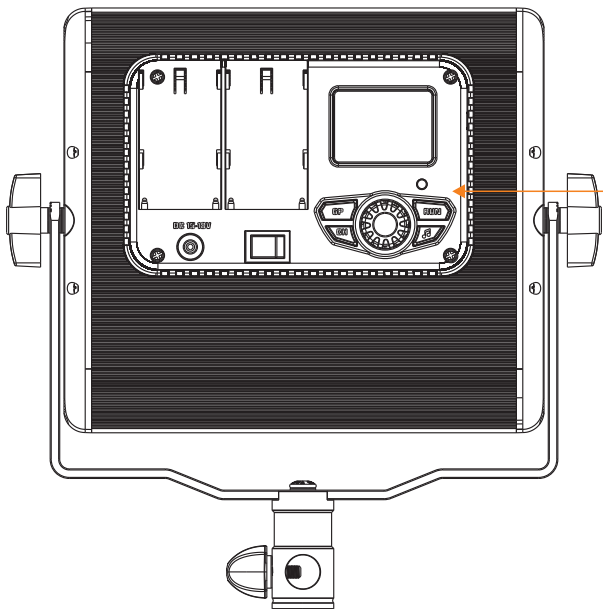


- 01 Battery Slot 02 Display 03 Indicator 04 DC Power Port
05 Power Switch 06 Group 07 Channel 08 Twist Button
09 Sound 10 ON/OFF (Switch)




7. 4V Lithium Battery* 2 (NP-F Series)
Batteries need to be purchased separately.


Installation

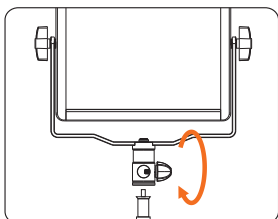


Release the lock knob and place the LED panel light on the light holder completely.

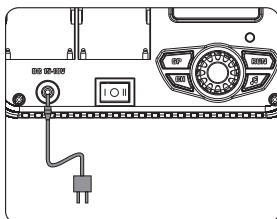


Plug in the power adapter (specially equipped with 15~18V 3~5A)

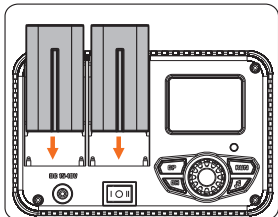


Install the batteries. (Batteries need to be purchased separately.)

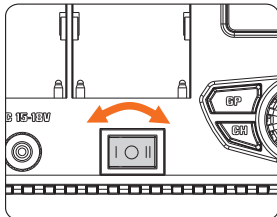

"I" indicates battery power, "O" indicates power off, "II" indicates adapter power supply.

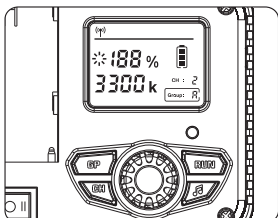


Operation interface

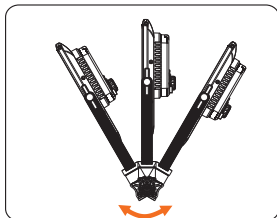

Adjust the LED panel light to the desired angle with the angle adjustment handle and fix it.

Operation

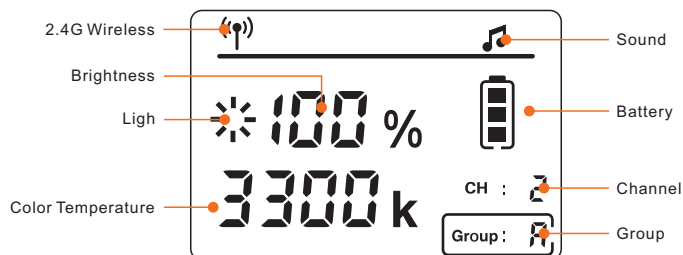

Power Switch
Press "I" to turn on the battery power
Press "II" to use the adapter power supply
Press "O" to turn off the power




Press <RUN> button until the "☀" mark is displayed on the screen to turn on the LED light. Press <🎵> button until the "🎵" mark is displayed on the screen to turn on the sound.



Rotate the twist button to adjust the brightness of the light.



Press the twist button and "5600K" icon flashes on the screen, then rotate the twist button to adjust the color temperature.



Press the <GP> button, and the "GR:88" icon flashes on the screen, then rotate the twist button to adjust the channel. Press the <CH> button, and the "CH:88" icon flashes on the screen, then rotate the twist button to adjust the group.

WARRANTY CARD

Name: _____

Tel: _____

Address: _____

Description of malfunction: _____

(please write down neatly, thanks for support)

Merchant: _____

Tel: _____

Product model: _____

Purchase Date: _____

Stamp sales: _____

MAINTENANCE RECORDS

Date for report: _____

Records for checking: _____

Maintainer: _____

Date for returning: _____

Tracking No. for returning: _____