

HPE Networking Instant On AP21 Flush Mount Sleeve

Installation Guide

Instant 



Hewlett Packard
Enterprise

Copyright Information

© Copyright 2024 Hewlett Packard Enterprise Development LP.

Hewlett Packard Enterprise Company
Attn: General Counsel
WW Corporate Headquarters
1701 E Mossy Oaks Rd, Spring, TX 77389
United States of America



The AP21 Flush Mount Sleeve lines up the exterior of the access point, offering a practical and aesthetic solution for concealment and customization.

Package Contents

Table 1: *Package Contents*

Item	Quantity
AP21 Flush Mount Sleeve	1

Installing the AP21 Flush Mount Sleeve onto the Access Point




It is recommended to install the wall/ceiling mount bracket prior to installing the AP21 Flush Mount Sleeve.

To install the AP21 Flush Mount Sleeve to the access point, follow these steps:

1. Align the I/O symbol on the sleeve with the AP's I/O ports (Ethernet and DC), fit the bottom corner of the sleeve around the access point, and then press the sleeve onto the access point until it clicks into place.


Figure 1 *Attaching the Sleeve onto the Access Point*

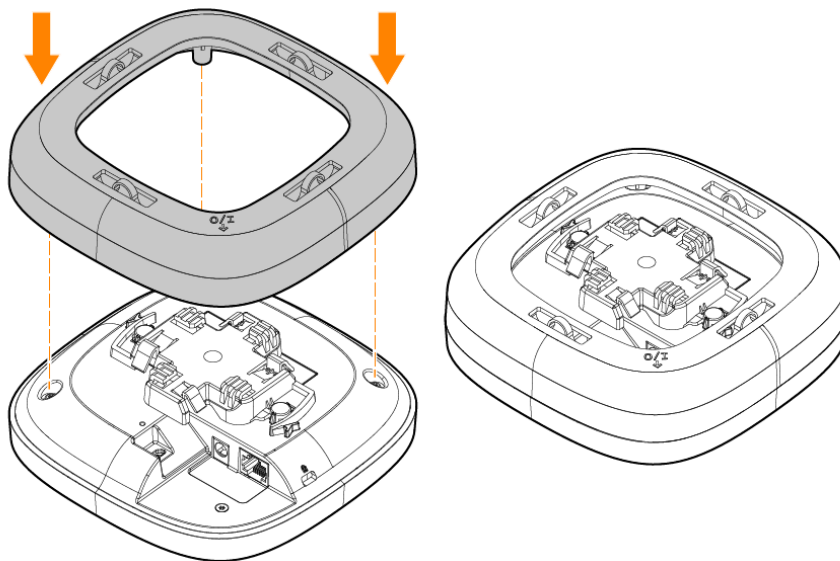

Installing the Access Point (with AP21 Flush Mount Sleeve) to a Ceiling Rail

1. Hold the access point next to the ceiling rail with the mounting tabs of the mount bracket at approximately a 30-degree angle to the ceiling rail.
2. Pushing toward the ceiling rail, rotate the access point clockwise until the access point clicks into place on the ceiling rail.


Figure 2 *Installing the Access Point (with the Sleeve) to a Ceiling Rail*

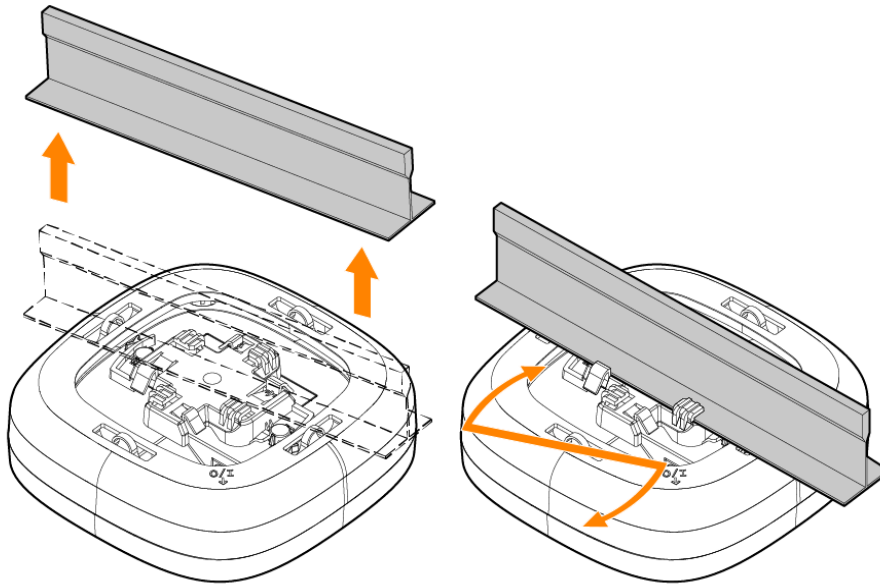

Removing the Access Point (with AP21 Flush Mount Sleeve) from a Ceiling Rail

1. Turn the access point (with the sleeve) by hand counter-clockwise until the mounting tabs of the mount kit disengage from the ceiling rail.
2. After the access point (with the sleeve) is removed from the ceiling rail, pull the sleeve off from the access point by hand.


Figure 3 *Removing the Access Point (with the Sleeve) from a Ceiling Rail*

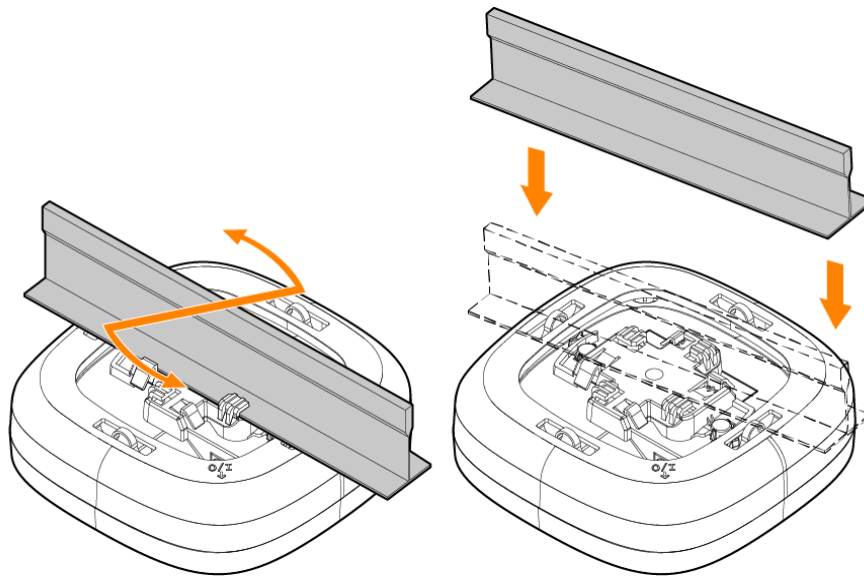

Installing the Access Point (with AP21 Flush Mount Sleeve) to a Wall

1. Install the mount bracket to the wall as per the installation instructions provided with the wall anchors.
2. Align the access point (with the sleeve) with the mount bracket, placing the access point so that its mounting tabs are at an angle of approximately 30 degrees to the mount bracket.
3. Pushing towards the wall, rotate the access point (with the sleeve) clockwise until it clicks into place.


Figure 4 *Installing the Access Point (with the Sleeve) to a Wall*

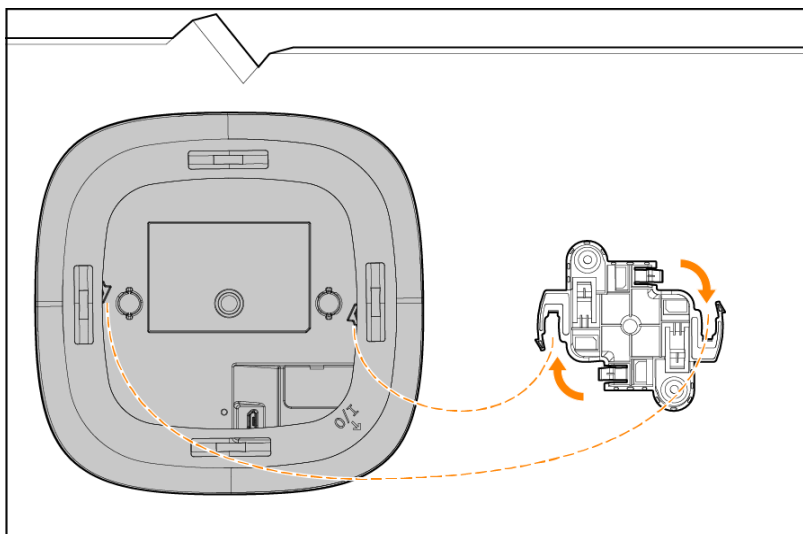

Removing the Access Point (with AP21 Flush Mount Sleeve) from a Wall

1. Turn the access point (with the sleeve) by hand counter-clockwise until the mounting tabs of the access point disengage from the mount bracket on the wall.
2. After the access point (with the sleeve) is removed from the wall, pull the sleeve off from the access point by hand.

Figure 5 *Removing the Access Point (with the Sleeve) from a Wall*

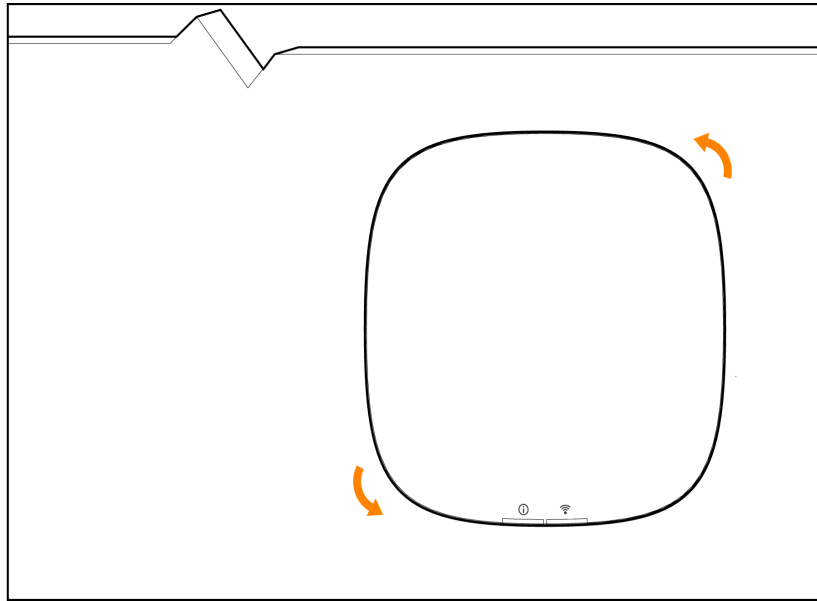

**Hewlett Packard
Enterprise**

© Copyright 2024 Hewlett Packard Enterprise Development LP.