



Product Overview

-The RL45B Ring Light features a lightweight yet durable design, featuring a plastic shell and a high-strength metal stand mount adapter.
-The detachable remote control is user-friendly, allowing you to easily power the light on and off, adjust the brightness level, and change the color temperature. Additionally, the light supports both APP and 2.4G wireless control for convenient and flexible lighting setups.
-Included with the device: a light stand, phone holder, and ball head adapter. The design also integrates cold shoe mounts into the light body for the attachment of additional accessories.

Package Contents

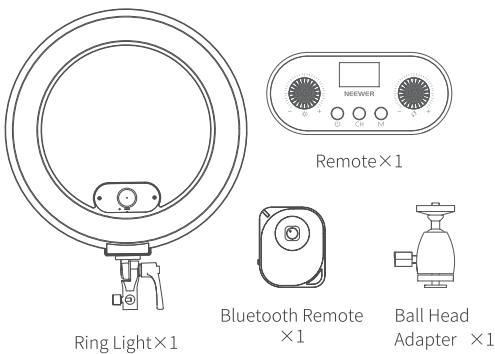


Package Contents

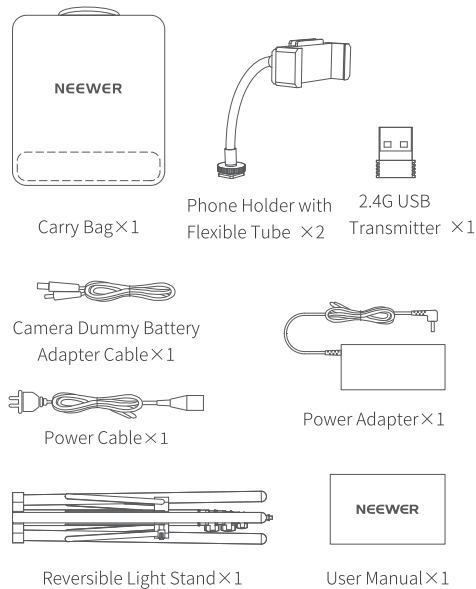


Product Display

1. Ring Light

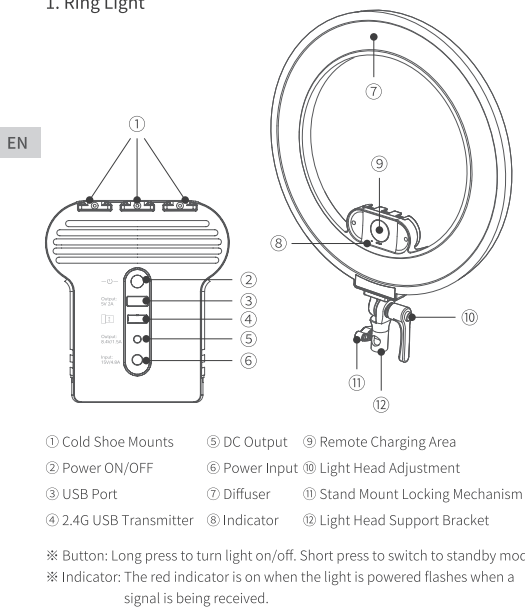


Product Display

2. Remote

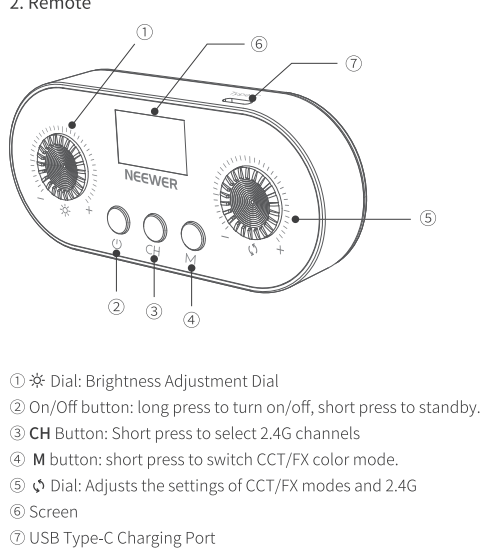


Installation Guide

1. Setting Up the Light Stand

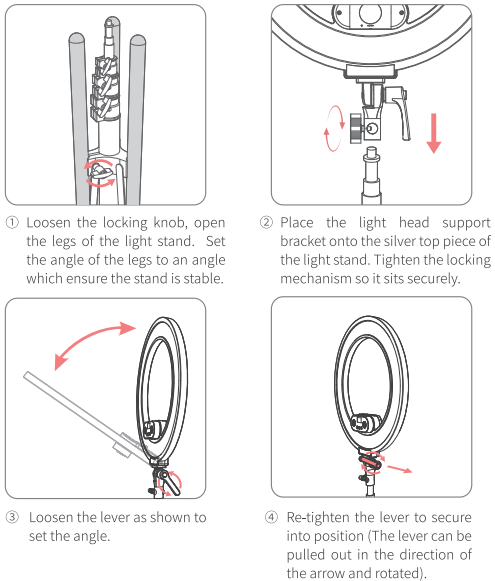

Installation Guide


2. Installing the Phone Holder

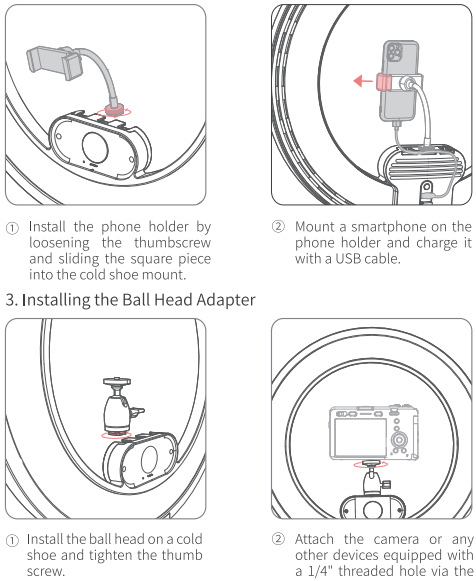

Operating Guide


1. Powering the Ring Light

Connect the power adapter to the power input of the ring light.

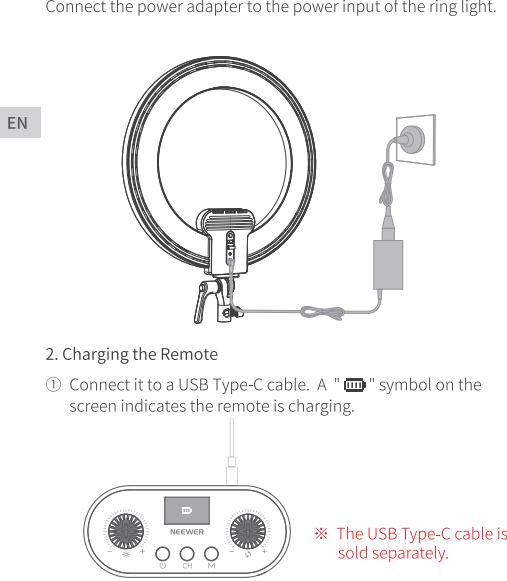


Operating Guide

Power on the ring light first, then place the remote on the charging area.

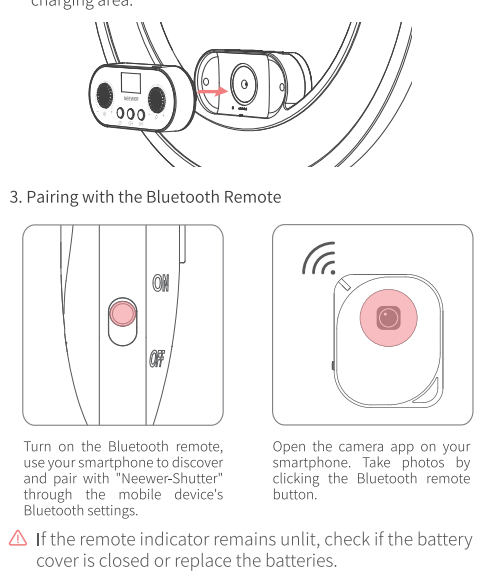

Remote Control


1. Introduction to Functions

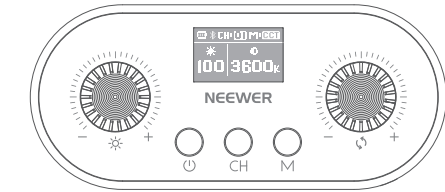

- Power On/Off & Standby**
When the remote is attached to the ring light, it can only switch the light to standby mode. To power off the light completely, please use the button on the ring light itself.
When the remote and ring light are separated, you can long-press the "ON" button for 1 second to turn the light on or off, and a short press will put the light into standby mode.
- Brightness Adjustment**
Turn the "*" dial left to decrease in 1% increments, turn it right to increase in 1% increments. Turn quickly to increase or decrease in 10% increments.
- Channel Selection**
Short press the CH button to select a channel. When the channel number displayed flashes, turn the "*" button to change channels, then short press the CH button to confirm the selection.

Remote Control

2. Bi-Color Mode

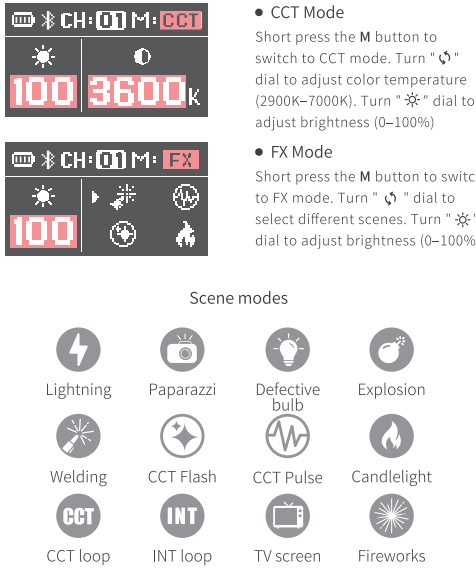

Remote Control

3. Pairing the Remote with Ring Light

When the ring light is powered on, the remote will automatically pair with the ring light when it is placed on the light body.

Note: The remote and the ring light are pre-set to the same channel and group when shipped.

The ring light can only receive wireless signals when it is powered on.

4. Using the remote to control Ring Light

- Controlling one Ring Light
Pair the remote with the ring light and use the remote for wireless control.
- Controlling multiple Ring Lights
-Pair the remote with the ring light(one remote for one ring light).
-Set multiple remotes in the same channel (for example, CH01).
-When operating one remote, other remotes set on the same channel will synchronize.

APP Control


1. APP Control



APP Control

2. 2.4G Control

The included 2.4G USB transmitter allows you to wirelessly control the ring light when Wi-Fi network is unavailable.

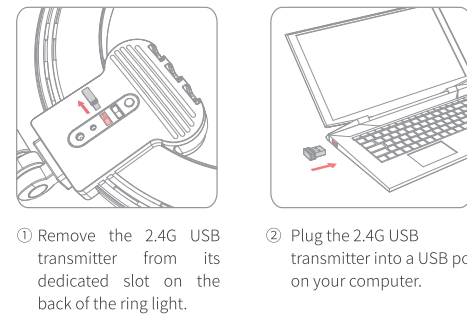

- Scan the QR code below to obtain instructions relating to 2.4G control.



Safety Advice

- Avoid dropping or subjecting the product to excessive force.
- Do not look directly into the lights as it may harm your vision.
- Keep the product away from flammable or explosive materials.
- Refrain from using the product in rainy or humid conditions.
- Disconnect the power when not in use.
- If the product will not be used for an extended period, store it in a dry, well-ventilated place, away from heat sources and magnetic fields.
- After the product has cooled down, store it inside a bag to prevent damage to the LEDs.

Specifications

Model	RL45B
Number of LEDs	288
Input Voltage	DC 15V
Maximum Power	45W
Maximum Illuminance	3300lx@0.5m
Color Rendering Index	CRI 97+
Dimming Range	0-100% (1% increments)
Color Temperature	2900K-7000K (100K increments)
Channels	00-10
FX Scenes	12
Control Modes	APP, 2.4G remote
Remote Battery Type	3.7V
Operating Temperature	-10°C-40°C
Dimensions	440x545x30mm
Weight	1.3kg