


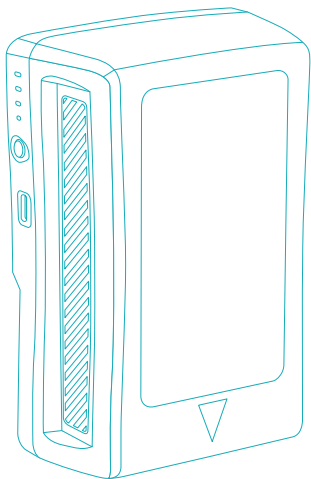

VM-150-PD

150WH V-MOUNT
BATTERY WITH
100W PD USB-C

User Manual

VM-150-PD


OVERVIEW

BATTERY

1. USB Type-C output and input charging port
2. Battery level check button
3. Battery level LED indicator-displays remaining battery capacity
4. USB-A output
5. D-Tap output and input charging port
6. V-mount interface

INCLUDED

- USB Type-C cable
- User Manual

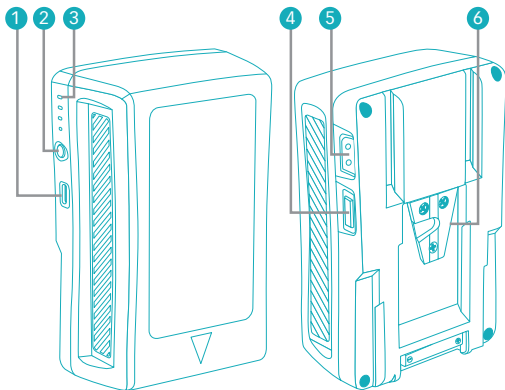

PRODUCT FEATURES

- USB Type-C port allows 100 W PD power with input/output charging.
- Max. 15 A continuous power for lights and other equipment.
- D-tap input/output connector powers your camera accessories.
- USB 2.0 Standard A connector provides 5 V / 2.4 A to power or charge USB devices.
- Four-segment battery level indicators allow for real-time monitoring of remaining battery capacity.
- Built-in control circuit provides protection against over-current, low voltage, overheating, and short circuits.

SAFETY PRECAUTIONS

- Make sure the battery is fully charged before use.
- When not in use, remove the battery from its device. Some electronic equipment will draw current, even when the switch is off.
- Do not short-circuit the terminals. Short circuits may cause severe damage to the battery.
- Do not attempt to open the battery case under any circumstances.
- Do not remove the battery from any equipment that is powered on. Always power off your equipment before removing the battery.

- Use the battery only under proper environmental conditions: 14°F to 122°F (-10°C to 50°C) and with a relative humidity (RH) less than 85%.
- Storage environment: short-term (one month) -4°F to 122°F (-20°C to 50°C) and RH 45% to 75%; medium-term (three months) -4°F to 104°F (-20°C to 40°C) and RH 45% to 75%; long-term (one year) 23°F to 86°F (-5°C to 30°C) and RH 45% to 75%.
- The battery may be warm during use or recharging. This is normal.
- The battery should be charged up to 50% for long-term storage. After four months of storage, the battery will require a recharge up to 50%.
- Keep the battery out of fire, heat, and high pressure.
- Do not expose the battery to rain or moisture.
- Do not drop the battery or expose it to strong shocks.
- Keep this unit away from any flammable gases or liquids.
- Clean the battery and terminals with a clean, soft, and dry cloth.
- When operation time has noticeably decreased, the battery may need to be replaced.
- Keep this product away from children.
- Store the battery in a cool, dry place.

SPECIFICATIONS

Mount Type: V-mount

Chemistry: Lithium-ion

Capacity: 10400 mAh / 150 Wh

Output Voltage: 14.8 V

Maximum Load: 15 A

Accessory Port:
USB Type-C
D-tap
USB Type-A

USB Type-C
Input/Output
(PD):
5 V / 3 A (15 W),
9 V / 3 A (27 W),
12 V / 3 A (36 W),
15 V / 3 A (45 W),
20 V / 5 A (100 W)

D-Tap Input/Output: 12 V / 15 A (max)

USB Type-A Output:
5 V / 2.4 A,
9 V / 2 A,
12 V / 1.5 A

Weight: 2.47 lb. (1.12 kg)

Dimensions
(H × W × D):
5.7 × 3.7 × 2.25 in.
(14.5 × 9.4 × 5.7 cm)

ONE-YEAR LIMITED WARRANTY

This Pawa product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of one (1) year from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function. This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Pawa Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Pawa along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.pawapower.com or call Customer Service at 212-594-2353.



Product warranty provided by the Gradus Group.

www.gradusgroup.com

Pawa is a registered trademark of the Gradus Group.

© 2025 Gradus Group LLC. All Rights Reserved.

GG1