


Product Overview


The Neewer RP19H ring light is designed with tactile buttons and is supplied with a 2.4G wireless remote control to easily adjust the light settings. The light's design is unique, allowing for three phone holders to be mounted at the same time, making it ideal for live video streaming on multiple social media platforms.

Package Contents

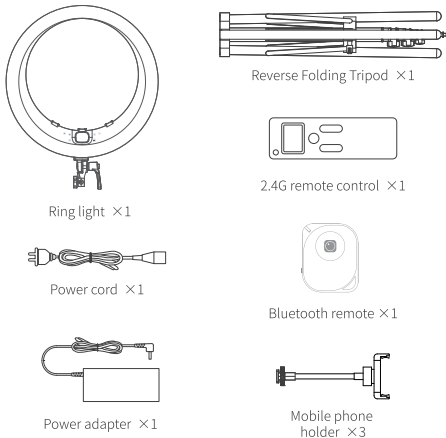

Product illustration


1. Ring light

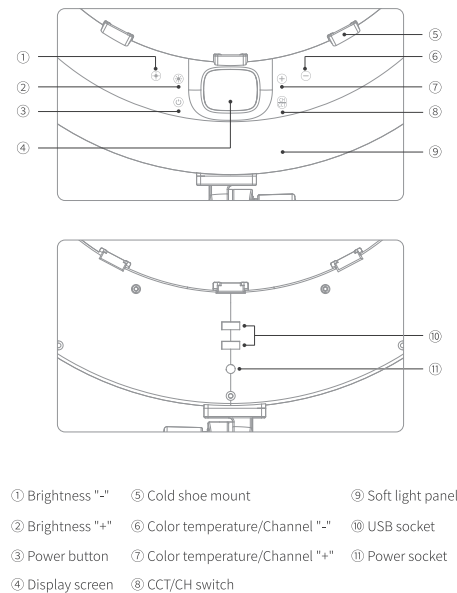

01


Product illustration

2. Remote control


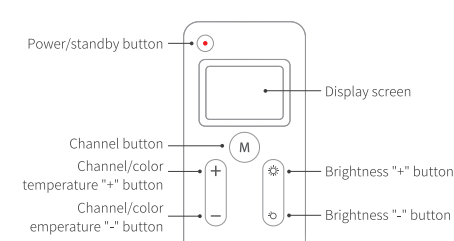


Installation Instructions

1. Mount the light on the tripod stand

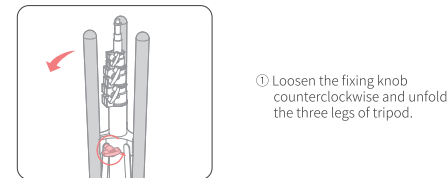


Installation Instructions

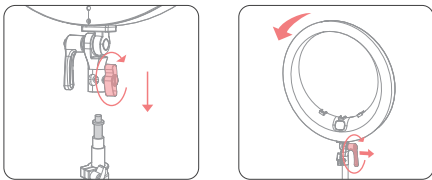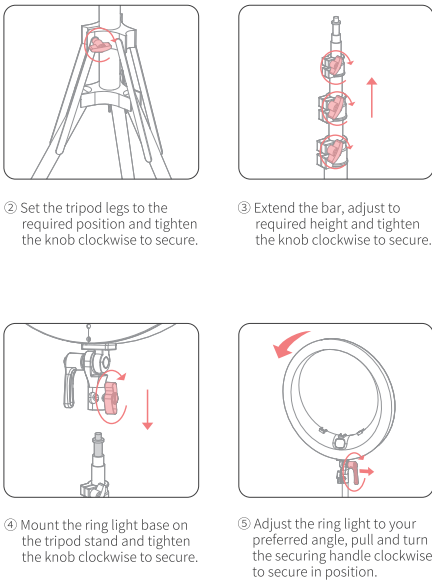

02

Installation Instructions


2. Install the phone holder

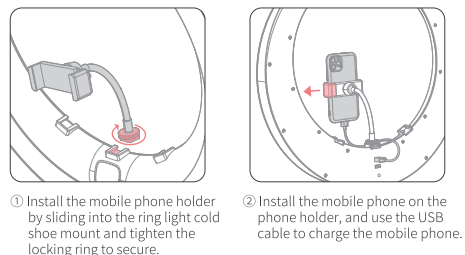

User instructions


1. Power up the ring light

Insert one end of the adapter into the power jack of the ring light. Plug the other end into a power outlet.

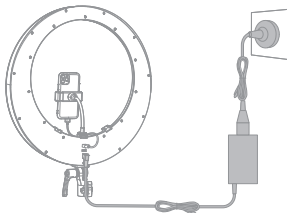

User instructions



2. Quickstart Guide

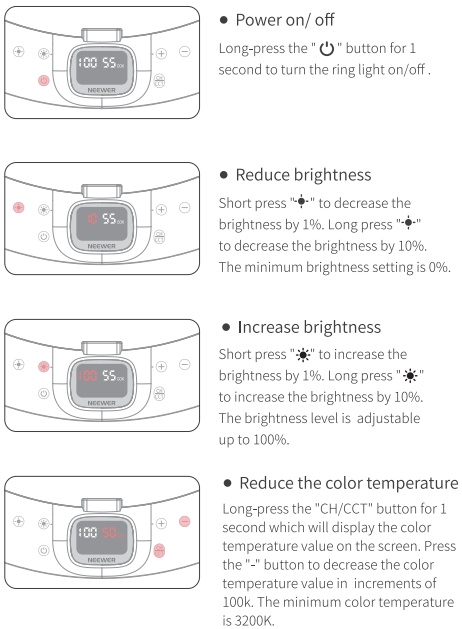

03


User instructions

EN

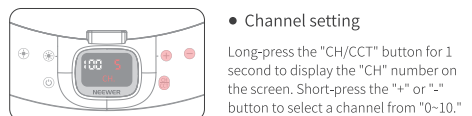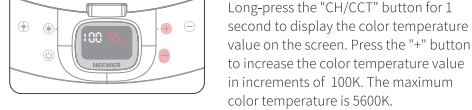

Tip: The channel CH:0 on the light is a backup channel, which only responds to the "88" channel setting on the remote control.


3. Bluetooth remote control for mobile phones

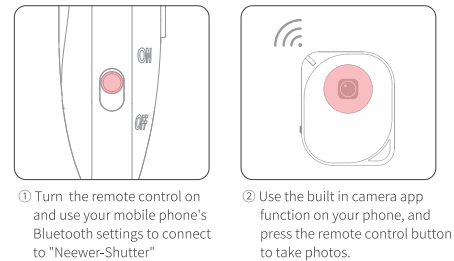

Basic functions of the remote control

1. Basic functions of the remote control

- Slide the battery cover downwards to remove. Insert two AAA batteries into the battery compartment respecting the positive and negative polarities. Replace the cover.
- Short-press the power button to turn the remote control on/off.

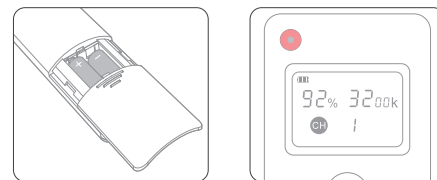

2. Adjust the remote control channel

- Turn on the remote control.
- Short press the remote control "M" key. The channel number will flash on the remote control's display.
- Short press the plus and minus buttons on the remote control to adjust the channels (1-10 and 88). There are 11 channels in total. After selecting, press the "M" button to confirm.



04

Remote control instructions


3. Using the remote control to control a single ring light

Set the ring light and the remote control to the same channel (for example, set both to channel "1") so that the remote control can control the ring light.



4. Using the remote to control multiple ring lights


Set the ring light unit channel to any number from 0-10. Set the remote control channel to "88". This allows the user to control multiple ring lights at the same time.

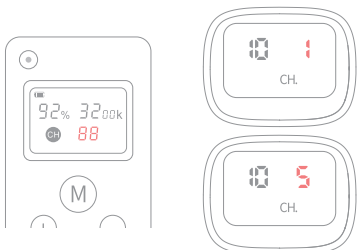

Remote control instructions

5. Using the remote control to control multiple groups of ring lights

- Set the first group of ring lights to the same channel (for example: channel "1"), and the second group of ring lights to the same channel (for example: channel "2"), and so forth in the case of further groups.
- When the remote control channel is set to "1", the first group of ring lights can be controlled. Likewise when the remote control channel is set to "2", the second group of ring lights can be controlled, and so on.
- If the remote control channel is set to "88", all ring lights are controlled together.

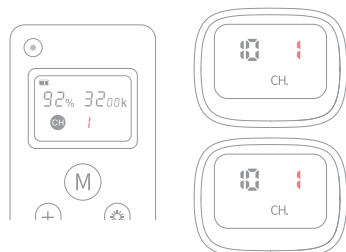

6. Using the remote control to adjust the brightness and color temperature


- Turn on the ring light and remote control. Set the ring light and remote control on the same channel.
- Press the plus button on the remote to increase the color temperature, and press the minus button to decrease.
- Press the sun icon button on the remote control to increase the brightness, and press the moon icon button to decrease.

05

Remote control instructions

EN

- Long-press the power button to enter or exit the standby mode.

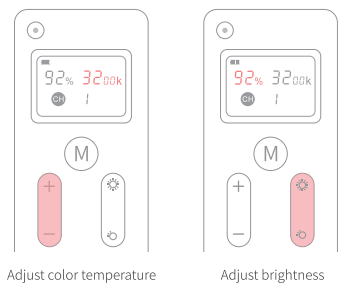

Safety Notes

- Please do not drop the product to prevent damage to the light or its components which could result from a strong impact.
- Please refrain from looking directly into the light which may result in eyesight damage.
- Please do not place the product in an environment containing flammable or volatile substances.
- Please do not use the product in the rain or a humid environment.
- Turn off at the power source when not in use.
- When not in use, please keep the product in a well-ventilated, dry place away from heat sources and magnetic fields.
- Wait for the product to cool down before putting it in a carry case to prevent any residual heat from causing damage to the LEDs.

Product Specifications

Product model	RP19H
Product size	480x480x52mm
Number of LEDs	512PCS
Input voltage	DC 15V
Maximum power	42W
Maximum illumination	2540Lx@0.5m; 907Lx@1m
Color rendering index	CRI 97+
Brightness adjustment range	0%-100%
Color temperature adjustment range	3200K-5600K
Available channels	0-10 channels
Remote control power	2 "AAA" batteries
Frequency Range	2410MHz
Maximum radio-frequency power	4.07dBm

06