



SIDETRAK SOLO PORTABLE MONITOR

START GUIDE



240 580 8725 | customerservice@siderak.com

WELCOME



Congratulations on your purchase! We are confident that you will be satisfied with your new portable monitor. The benefits of working on multiple screens will make your worklife easier!

WELCOME TO A MORE PRODUCTIVE YOU!



sidetrak.com



[@sidetrakmonitor](https://twitter.com/sidetrakmonitor)



facebook.com/sidetrakmonitor



[@sidetrak.monitor](https://instagram.com/sidetrak.monitor)

CONTENTS




- 1 Product Interface
- 2 What's In The Box
- 3-5 Operating Instructions
- 6 FAQ
- 7 Technical Specifications
- 8 Contact Us

PRODUCT INTERFACE



SideTrak Solo Portable Monitor

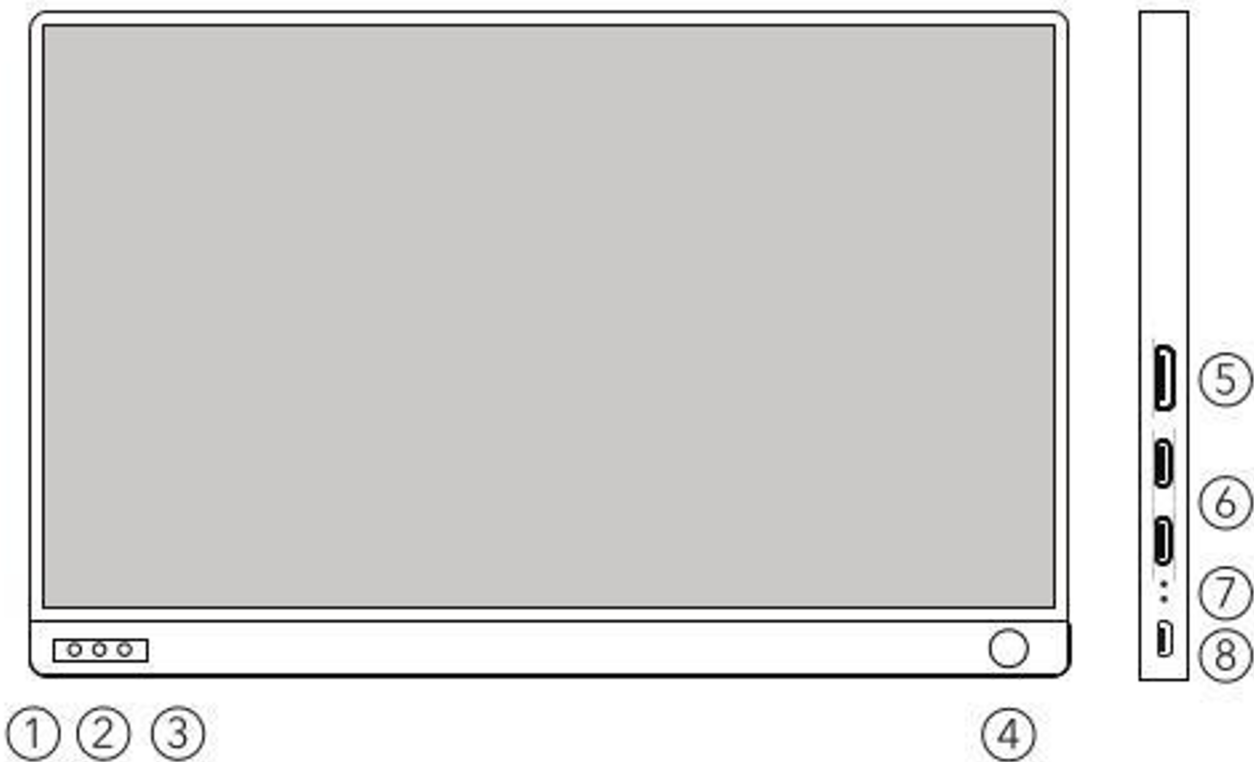

①		Menu Button	Menu and enter key
②		Adjust Button Up	Volume and brightness upward adjustment
③		Adjust Button Down	Volume and brightness downward adjustment
④		Pen Hole	Pen stand design
⑤		HDMI Mini Connector	Input for video signal
⑥		USB-C Port	USB-C type port
⑦		Indicator Lights	Power and signal indicators
⑧		Micro USB	Micro USB input for external keyboard, mouse, etc

WHAT'S IN THE BOX



Monitor Screen



USB-C Cable



USB-A to USB-C
Cable



Standard HDMI® to
HDMI® Mini Cable

OPERATING INSTRUCTIONS



Watch the installation video here

1. Plug In

If your laptop has a USB-C port, connect one end of the USB-C to USB-C cable to the laptop and the other end to the monitor. Some laptops may not provide enough power to the monitor. Check the USB-C port on your laptop for the symbols shown in the table below. If you have one of the green checked symbols, then your USB-C port will provide data and enough power to the monitor. Note, MacBook ports are compatible even if there are no symbols next to it.

	✓		✓		✗		✗
	✓		✓		✗		✗
	✓	All Mac laptops with C ports are compatible	✓		✗		✗

If the monitor won't turn on, connect the USB-A to USB-C cable along with the Standard HDMI® to HDMI® Mini Cable

OPERATING INSTRUCTIONS

If your laptop does not have a USB-C port, connect one end of the USB-A to USB-C cable to the laptop and the other end to the monitor. Then also connect the HDMI cable. Monitor must be plugged in to power on.



2. Using Your Kickstand

Flip the protective cover open and place the monitor behind one of the three monitor stoppers to set it to your preferred angle.



OPERATING INSTRUCTIONS

3. Adjust Settings

To bring up the main menu press the menu button. When inside the menu use the “+” and “-” buttons to move left and right. Use the menu button to select the highlighted option. Once the option is highlighted, use “+” and “-” buttons to adjust the values. Press and hold “-” button to return to the previous menu.

You can adjust the volume and brightness without bringing up the main menu by pressing the “+” and “-” buttons to adjust volume. Press and hold “+” and “-” buttons to adjust the brightness.

4. Indicator Light

The light indicates whether or not the monitor is receiving a signal. The blue light will always be on when the monitor is connected. If the blue light is not on, that means the monitor is not receiving a signal.

Menu Settings

You can adjust brightness, contrast, color temp, hue, saturation, DCR, sharpness, freesync in the menu settings of your monitor.

FAQ



Q: My monitor won't power on

A: If you are not using a USB-C to USB-C cord, make sure your monitor is connected to your laptop with both the Standard HDMI® to HDMI® Mini Cable and the USB-A to USB-C. Then, press and hold the on/off button to power up the monitor.

Q: Why do I have to plug in two cords if I don't have a USB-C port on my laptop?

A: The USB-C to USB-C cord is strong enough to communicate power and graphics through one cord. If you can't use the USB-C to USB-C cord you will have to use the Standard HDMI® to HDMI® Mini Cable along with the USB-A to USB-C cord so that it can communicate power through one cord and graphics on the other.

Q: How do I adjust brightness?

A: If you have the non-touch screen, push the wheel/menu button to bring up the menu, then move the wheel/menu button up and down to get to the brightness setting. Push the wheel/menu button to select the brightness setting. Then, move the wheel/menu button up or down to adjust brightness to your preference.

TECH SPECS



SideTrak Solo Portable Monitor

Size		15.6 inch
Model		STFRHDEC15BL
Touchscreen		No
Battery		No
LCD Panel	Display Type	LCD
	Brightness	250 cd/m2
	Contrast Ratio	600:1
	Active Area (inches)	13.55 x 7.63
	Pixel Pitch (mm)	0.48 x 1.44
	Resolution	1920 x 1080
	Aspect Ratio	16:9
	Response Time	30 ms
	View Angles	85/85/85/86
	Panel Surface	Anti-glare
	Refresh Rate	60 Hz
	PPI	176
Interface	Input 1	TYPE-C x 2 (USB-C)
	Input 2	HDMI® Mini Connector
	Input 3	Micro USB

Output Terminal	Earphone	3.5 mm
	Speaker	1W*2
Power	Power Consumption	4.5W
Physical	Dimensions (W*D*H)	0.88 x 14 x 0.35 in
	Weight	1 lbs
Controls	On Screen Display	Standard OSD format
	Preset Mode	Movie mode, gaming mode
Color	Color Bit Depth	8 bit
	Color Temp	9300, 6500, User Mode
	Color Gamut	50%
	Display Colors	16.7 M

CONTACT US



If you have any questions, we are here to help!

240.580.8725

customerservice@sidetrak.com

<https://sidetrak.com>

Follow us!

Stay updated on product launches, news, and tips.



@sidetrak.monitor



@sidetrakmonitor



facebook.com/sidetrakmonitor



SIDE TRAK