



SIDETRAK SOLO FREESTANDING FULL HD MONITOR

START GUIDE



240.580.8725 | customerservice@sidetrak.com

WELCOME



Congratulations on your purchase! We are confident that you will be satisfied with your new portable monitor. Our mission is to bring joy to people at work by offering the portability of a laptop with the productivity of working on two screens.

The benefits of a second screen will make your worklife easier!

WELCOME TO A MORE PRODUCTIVE YOU!

CONTENTS




- 1 Product Interface
- 2 What's In the Box
- 3-4 Operating Instructions
- 5 Frequently Asked Questions
- 6 Troubleshooting
- 7 Technical Specifications
- 8 Contact Us

PRODUCT INTERFACE




SideTrak Solo Full HD Portable Monitor

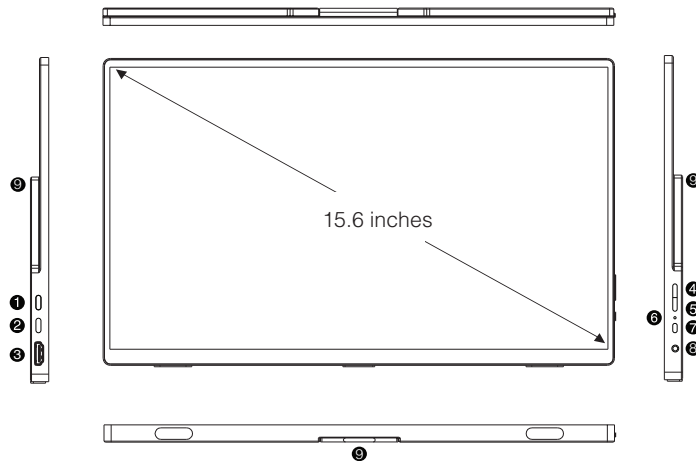

❶		Type-C USB Input	Full Function Type-C Port
❷		Type-C USB Input	Full Function Type-C Port
❸		HDMI® Connector	Input for video signal
❹		Volume / Menu Button	Increase (+) Brightness / Upward selection in the menu
❺		Volume / Menu Button	Decrease (-) Volume / Downward selection in the menu
❻		LED light indicator	Power light
❼		On / Off & Menu Button	Power on and off / Menu Button selection in the menu and return
❽		3.5mm Headphones Input	External audio connector, headset
❾		Support	180° Rotation Spindle

WHAT'S IN THE BOX



USB-C Cable



Standard HDMI®
Cable



USB-A to TYPE-C
Cable



Protective
Sleeve

OPERATING INSTRUCTIONS



1. Plug In

If your laptop has a USB-C port, connect one end of the USB-C to USB-C cable to the laptop and the other end to the monitor. Some laptops may not provide enough power to the monitor. Check the USB-C port on your laptop for the symbols shown in the table below. If you have one of the green checked symbols, then your USB-C port will provide data and enough power to the monitor. Note, MacBook ports are compatible even if there are no symbols next to it.

	✓		✓		✗		✗
	✓		✓		✗		✗
	✓	All Apple laptops are compatible	✓		✗		✗

If the monitor won't turn on, connect a USB-C to USB-A cable (or USB-A adapter) along with the HDMI cable.

OPERATING INSTRUCTIONS



If your laptop does not have a USB-C port, connect a USB-A to USB-C cable to the laptop and the other end to the monitor. Then also connect the Standard HDMI® Cable



If you are connecting to other devices, be sure to connect to an external power supply first by using the secondary USB-C port, then connect the Standard HDMI® Cable to ensure a smooth transition of signal.


Monitor must be plugged in to power on.

2. Turn On

Press and hold the On/Off button for 1 second to power on your monitor.

3. How to use the kickstand:

Open the stand from the bottom of the unit, adjust the stand to a 45 degree angle or any angle as you like to stand the monitor. You can also use the stand to hang up on the wall or anyway you want by adjust the stand to 180 degree.

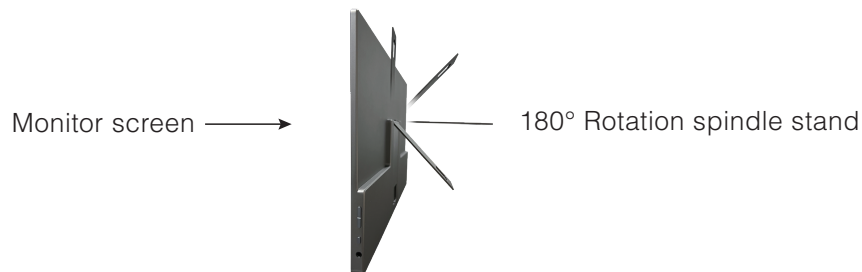

OPERATING INSTRUCTIONS



4. Adjust Settings

To bring up the main menu press the power button once. When inside the menu use the “+” and “-” buttons to highlight the desired option, and press the power button once to select the highlighted option. Once the option is highlighted, use “+” and “-” buttons to adjust the values. Press and hold “Menu Button” button to return to the previous menu.

You can adjust the volume and back-light without bringing up the main menu by pressing the “+” and “-” buttons to adjust volume. Press and hold “+” and “-” buttons to adjust the back-light.


To prevent any damage to the monitor, please turn off and unplug the monitor when left unattended for long periods of time.




Menu Settings




Brightness: Adjust from 1-100
Contrast: Adjust between 0-100
Eco: Choose between standard game, movie, photo, vivid, user
DCR (Dynamic Contrast): turn on or off
Sharpness: Adjust between 0-4




Color temp: Change between 9300K, 6500K, and SRGB
Hue: Adjust between 0-100
Saturation: Adjust between 0-100
Low blue light: Adjust between 0-10
Freesync: turn on or off



Volume: Adjust between 0-100
Mute: Turn sound on or off



Language: Change language of menu
HDR (High Dynamic Range): Change between off, auto, and 2084.
Save Backvol: turn on or off, when you select "ON", the unit will remember the brightness and volume as you set when connect the monitor w/o adaptor.
Reset: Reset all settings



Change input between auto, type-c1, type-c2, and HDMI®

FAQ



Q: Is my laptop compatible with SideTrak Solo?

A: Check the ports on your laptop. If you have a USB-C port with any of the symbols shown on page 3, then your laptop is compatible and you will only need to use one cord. If you don't have a compatible USB-C port, then you will need to plug in the Standard HDMI® Cable and the USB-C to USB-A cord. If your laptop doesn't have an HDMI® Connector, you may need to purchase an additional adapter, a hub, or a dongle.

Q: My monitor won't power on.

- A:
- If you are not using a USB-C to USB-C cord, then make sure your monitor is connected properly to your laptop with both the Standard HDMI® Cable and a USB-A to USB-C cord.
 - Try using a different port on your laptop or device. You can also try using a different cord.
 - Make sure you have turned the monitor on by pressing the power button for three (3) seconds.
 - Make sure the correct input source is selected through the input source menu.

Q: Why do I have to plug in two cords if I don't have a USB-C port on my laptop?

A: The USB-C to USB-C cord is strong enough to communicate power and graphics through one cord. If you can't use the USB-C to USB-C cord you will have to use the Standard HDMI® Cable along with a USB-A to USB-C cord so that it can communicate power through one cord and graphics on the other.

Q: How do I adjust brightness?

A: Press the power button once to bring up the main menu. Move up or down with the “+” and “-” buttons to find the brightness option. Select the brightness option by pressing on the power button. Once an option has been selected, use “+” to increase brightness or “-” to decrease brightness.

TECHNICAL SPECIFICATIONS

SideTrak Solo Full HD Portable Monitor

Size		15.6 inch
Model Name		156AS
PPI		141
LCD Panel	Display size	15.6" LED-Backlight
	Brightness (Typical)	250cd/m2
	NTSC	45%
	Contrast (Typical)	600:1
	Active Area (mm)	103.27 square inch
	Pixel Pitch (mm)	0.17925(H) x 0.17925(V)
	Resolution (H x V)	1920 x 1080
	Aspect Ratio	16:9
	Response Time (Typical)	25ms
	View Angles LR, UD(CR>10)	H 170°/ V 170°
	Panel Surface	TFT IPS
	Display Colors	262K colors (RGB 6-bit)
	Refresh Rate	60Hz
Interface	Input 1	TYPE-C x 2(USB-C)
	Input 2	HDMI® x 1

Output Terminal	Earphone	3.5mm Earphone x 1
	Speaker (Typical)	1W*2
Power	Consumption (Typical)	Typical 5W, Max 10W
	Power Mode Light	Power on: Blue (LED)
Physical	Dimensions (W*D*H)	355 x 213 x 12mm
	Net Weight	0.782 KG
	Gross Weight	1.56 KG
Controls	Front Control	Standard
	On Screen Display	Standard OSD format
	Color	9300K,6500K,User Mode
	Preset Mode	Standard,Game,Movie, Photo,Vivid,User

CONTACT US



If you have any questions, we are here to help!

240.580.8725

customerservice@sidetrak.com

<https://sidetrak.com>

Follow us!

Stay updated on product launches, news, and tips.



@sidetrak.monitor



@sidetrakmonitor



facebook.com/sidetrakmonitor



SIDE TRAK