

PB-22800LT 22,800mAh

POWER BANK

Laptop Power Bank with DC/USB Outlets

User Manual



Thank you for choosing Xcellon.

The Xcellon PB-22800LT is a powerful, portable, and easy-to-use power bank that is capable of simultaneously charging multiple devices such as laptops, notebooks, tablets, and smartphones.

The Power Bank features a powerful Li-polymer battery with a capacity of 22,800 mAh. The multivoltage DC output offers five settings (9, 12, 16, 19, and 20 V), and a variety of ten charging tips are included for compatibility with most laptops, notebooks, or digital cameras. The Power Bank is designed with two USB outputs; the 2.1 A output can be used to charge tablets at top speed, and the 1.0 A output is ideal for charging smartphones or similar devices. Anyone traveling with multiple devices can use all three outputs simultaneously without a drop in power to any of the outputs.

The stylish brushed aluminum exterior helps dissipate heat to ensure that the power bank won't get too hot when charging. An LCD shows the status of the Power Bank's battery capacity and voltage output, and which output ports are in operation. A universal AC input power adapter is included with the Power Bank for international use.

Precautions

- » Set the proper voltage on the Power Bank before connecting your laptop computer. Failing to do this may cause damage to your computer or device.
- » Do not use this unit around water or any flammable gases or liquids.
- » Please read and follow these instructions, and keep this manual in a safe place.
- » Make sure that this product is intact and that there are no missing parts.
- » Keep this product away from children.
- » Use only the correct, recommended voltage.
- » All images are for illustrative purposes only.

Overview

Top



- 1 LCD
- 2 Power/voltage select button

Side

- 3 AC adapter input port
- 4 1.0 A USB charging port
- 5 2.1 A USB charging port
- 6 DC output port

Also Included

- » Universal AC power adapter and cable
- » DC output cable
- » USB cable
- » Charging tips (×10)
- » User manual

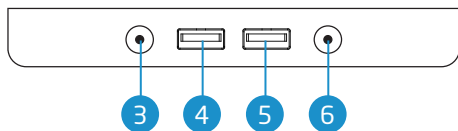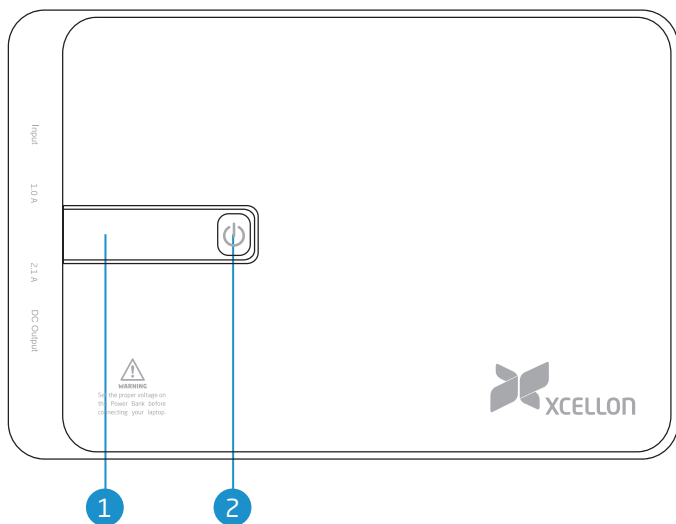

Charging the Power Bank

The PB-22800LT includes a universal AC power adapter. To charge the Power Bank, follow these steps:

1. Plug the AC power cable into the input port of the Power Bank.
2. Plug the power adapter into an AC outlet. The LCD will illuminate to show the battery capacity percentage, and the battery indicator will flash to show that the battery is charging.
3. When the Power Bank is fully charged, remove the AC cable. If not in use, the Power Bank will automatically shut off after a few seconds.

Charging a Laptop Computer

1. Select the appropriate charging tip that is compatible with your computer or device and slide it over the DC cable.



Note! Some laptops are already compatible with the charging tip at the end of the DC output cable.

2. Press and hold the power button for approximately 3 seconds. The voltage number will appear, and the voltage indicator will blink.
3. Set the proper voltage by repeatedly pressing the power button to scroll through the available settings.



Important! Make sure to select the correct output voltage on the Power Bank before connecting your laptop. Look for the output voltage on your laptop's power adapter.

4. Once the correct voltage setting is selected, insert the DC output cable. The voltage indicator will stop blinking to indicate that the Power Bank is ready to charge your device.
5. Plug the DC output cable into the input port of your laptop or device.



Note! The voltage setting cannot be changed once the DC output cable has been inserted into the Power Bank. To change the voltage setting, remove the DC output cable, and repeat steps 2 through 5 above.

Charging USB Devices

The Power Bank is equipped with two USB Charging ports.

- » Use the 2.1 A USB port for iPads and other tablets.
- » Use the 1.0 A USB port for charging smartphones.

Connect the USB charging cable to your device and plug the other end into the appropriate USB port of the Power Bank.

The LCD screen will automatically illuminate, and the USB icon will be displayed, indicating that your device is properly connected.

Charging Multiple Devices

The Power Bank is designed with the capability to simultaneously charge multiple devices. Devices can be added to or removed from the power bank at any time during the charging process.

If USB devices are in the process of charging, a laptop or notebook can be added to the Power Bank by following the instructions for *Charging a Laptop Computer* above.

When a device is fully charged, unplug it from the Power Bank. When the last device is disconnected, the Power Bank will automatically shut off.



Note! If the Power Bank is charging multiple devices and the battery indicator shows that the capacity is running low, attach the AC Power Adapter and plug it into a wall outlet. It will recharge the battery as the Power Bank charges your devices.

Troubleshooting

Problem	Solution
The Power Bank won't charge	• Make sure the Power Bank is securely connected to the wall outlet. • Make sure you have properly connected the AC plug and power adapter to the Power Bank.
A USB device is plugged into the Power Bank but isn't charging.	• Make sure the device is securely connected to the USB output. • Make sure that the battery has enough capacity remaining to charge the device. • The battery capacity of the power Bank may be too low. Recharge the Power Bank.
The Power Bank suddenly shut down.	• The battery is low and the Power Bank needs to be recharged.

Specifications

Dimensions (H × W × D)	0.8" × 4.9" × 7.3" (2.0 × 12.4 × 18.5 cm)
Weight	581 g, ±30 g
Capacity	22,800 mAh
Battery Type	Lithium polymer
DC Input	20 V / 2.0 A
DC Output (Max.)	9 V, 4.0 A 12 V, 4.0 A 16 V, 4.0 A 19 V, 3.5 A 20 V, 3.0 A
USB Output 1	2.1 A
USB Output 2	1.0 A
USB Cable Connectors	Standard-A to Micro-B
Operating Temperature	Charging: 32°F to 113°F (0°C to 45°C) Discharging: -4°F to 131°F (-20°C to 55°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)
Operating/Relative Humidity	<75% RH

One-Year Limited Warranty

This Xcellon product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of one (1) year from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function.

This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Xcellon Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Xcellon along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.xcellongear.com or call Customer Service at 212-594-2353.



Product warranty provided by the Gradus Group.

www.gradusgroup.com

Xcellon is a registered trademark of the Gradus Group.

© 2016 Gradus Group LLC. All Rights Reserved.

