



Angled Wall Mount 70-Volt Speaker


SYSTEM 2 is a complete loudspeaker system consisting of an 8" O.D., dual cone loudspeaker and a 5W, 25/70V transformer mounted on a square, screw mount, steel baffle with a slanted, steel, vandal resistant, surface mount enclosure with four (4) 8-32 threaded inserts, a single 1/2" conduit entrance on the back, and two (2) Wiremold knockouts and a white, powder coat finish.



Specifications

6400-00155

Dimensions (hwxwd)	29.53 x 29.53 x 13.65 cm / 11.625 x 11.625 x 5.375 in
Weight	4.54 kg / 10 lbs
Loudspeaker	8C5PAX
Transformer	TBLU: 5W, 25/70V, with 5 taps (0.31W, 0.63W, 1.25W, 2.5W, 5.0W)
Baffle	BS8W
Backbox	SE2WVP with four (4) 8-32 threaded inserts
Finish	White powder coat
Average Sensitivity	92dB SPL, 1W/1M
Loudspeaker Power Rating	12W RMS, EIA 426A Standard
Maximum Output	15W @ 8 Ohms
Calculated Output	99dB SPL, 5W/1M
Magnet Type & Weight	BeFe Ceramic, 5 oz. Nominal
Frequency Response	65Hz - 17kHz EIA, 426A Standard
Nominal Coverage Angle	100° Included Angle, -6dB/2kHz, Half Space
Audio Connection	7in / 17.78cm Color-coded, Pre-tinned Leads
Intended Use	Indoor environment
Program Material	Signal tones, voice and music
Installation	Horizontal or vertical surface mount

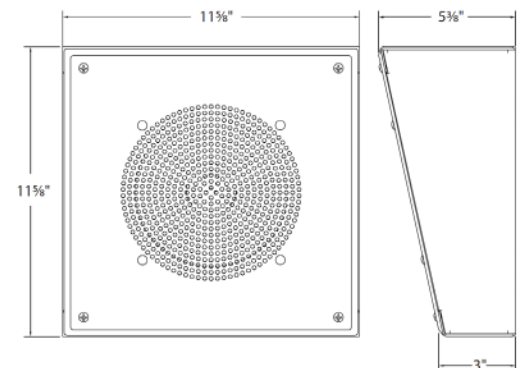

Learn more at [boxlight.com](https://www.boxlight.com)