




Compact Dual Gooseneck Floor Stand for Phone and 7-13-Inch Tablets

PAD-CGS2P


INSTRUCTION - MANUAL

CONTENTS:

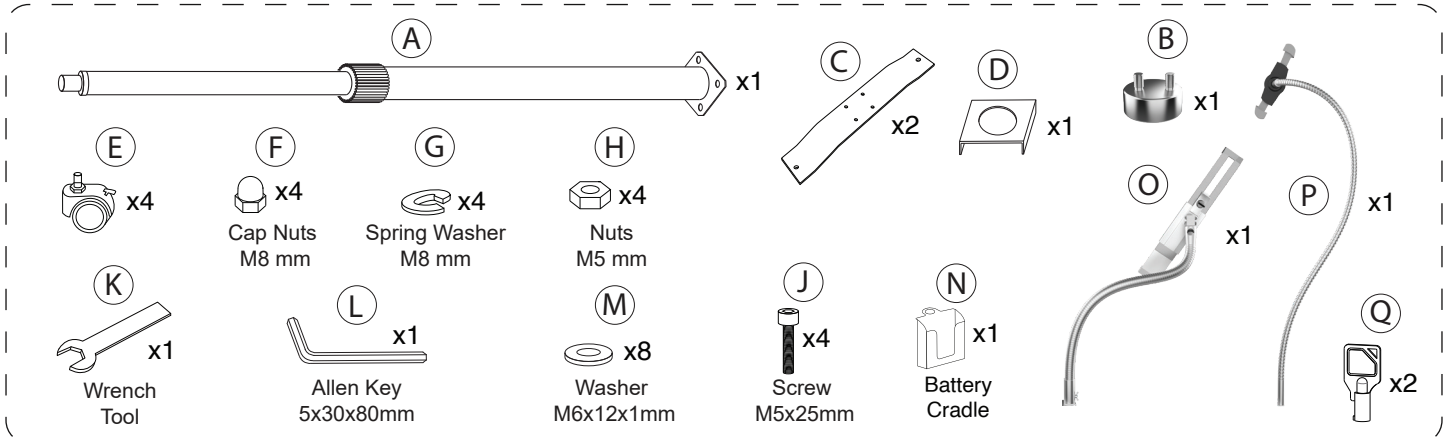


INSTRUCTIONS:


1. Assembling the Wheels

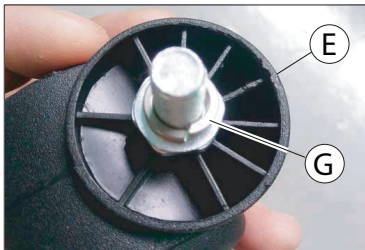

1A. Place spring washer (G) over the screw bolt on the wheel (E).

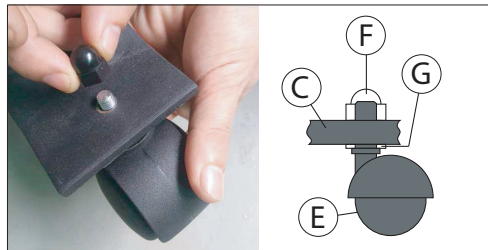


1B. Place the screw of the wheel (E) through the metal base (C). Place nut cover (F) over the top. Turn in cap nut (F) to wheel using hand.

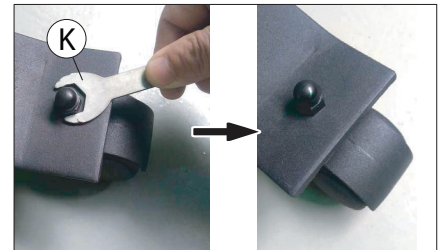


1C. Follow up by using provided wrench tool (K) to securely tighten as seen above.

2. Assembling the base stand

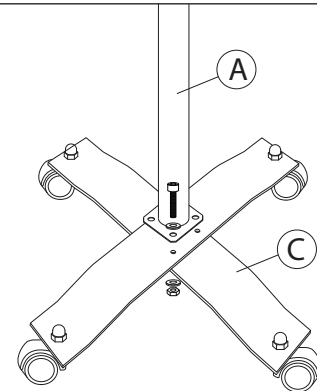


2A. Place the metal base pieces (C) in a cross position and align the holes on the base pole (B). One of the metal pieces will be slightly higher at the middle, so that piece will be on top.

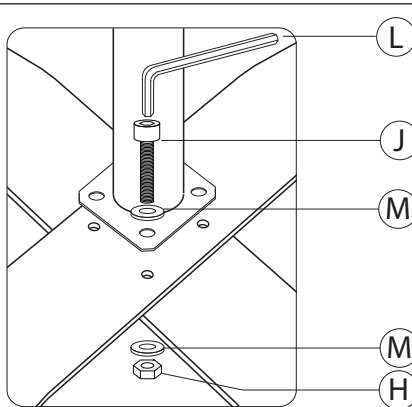


2B. Insert the screw bolt (J) through all of them in the corresponding order as shown. Using your hand to initially rotate in the screw while your other hand is holding the hex nut (H). Afterwards, use the provided allen key tool (L) to securely tighten. Repeat for all (4) holes in the same manner.

3. Locking casters



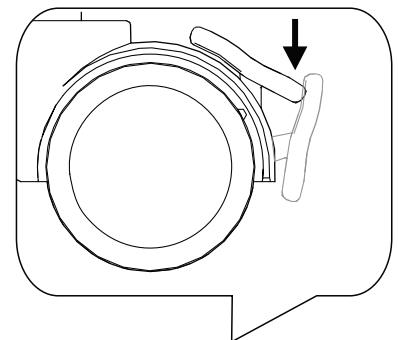


3A. Press the wheel lever up or down to place wheels in locked or unlocked mode depending if you want to be in a mobile or stationary setup. Make sure you adjust all (4) wheels at the same time or it won't properly be setup.



4. Assembling Base Stand with Dual Gooseneck, Holder and Battery Cradle

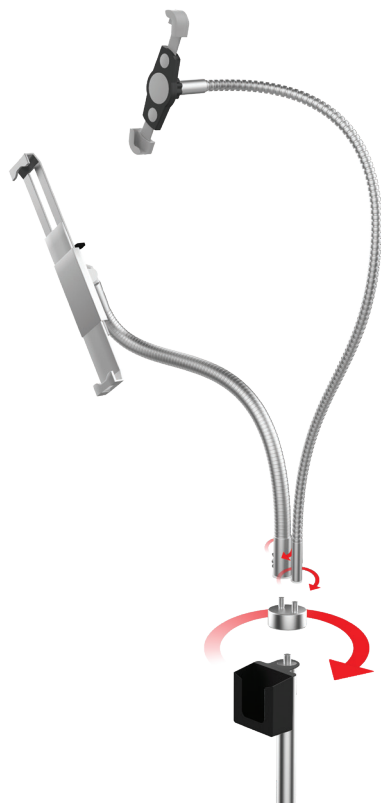


4A. Hook the battery cradle (N) onto the base stand metal adapter. Then, take the dual joint component (B) and using your hands rotate it onto the very top of the main body pole where the male adapter is until securely attached. Then, take either of the goosenecks (O, P) and rotate it onto the dual joint component (B), then turn the Y screw to securely fasten the gooseneck to the base stand. Repeat for both goosenecks as illustrated above.

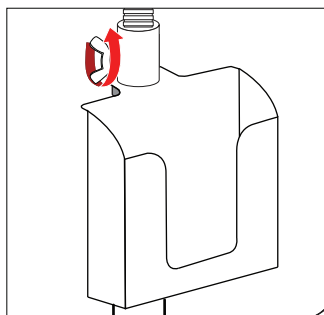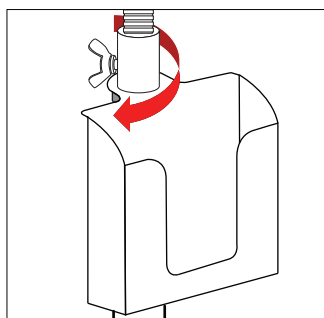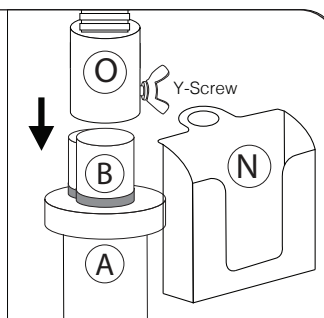

5. Placing Device into Security Holder

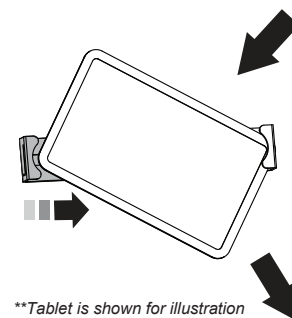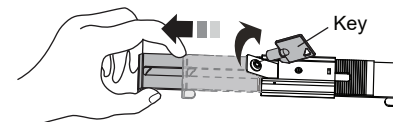


****Tablet is shown for illustration purposes only. Not Included.**

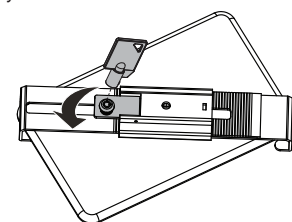


5A. Insert key (Q) into lock at the back of the holder. Rotate counter clockwise to unlock, pull back the key and keylock so the holder becomes free. Extend arms to open to fit tablet at corners. Insert tablet into holder, retract holder arms around corners until snug fit. Push forward key with key lock back into the holder. Then rotate key clockwise to tighten.

Adjusting Pole Height

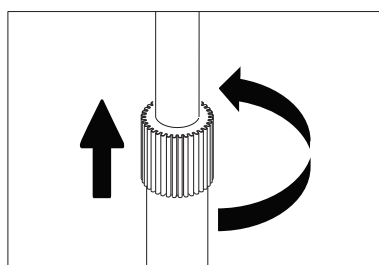

Rotate to loosen

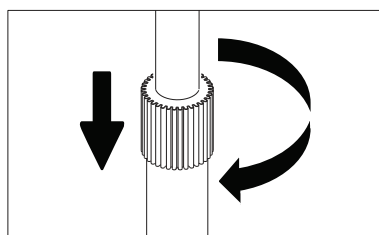


Raise or lower metal pole to desired height. Rotate opposite direction to tighten and secure height.

Setting Up Phone Holder



****Phone is shown for illustration purposes only. Not Included.**

1. Attach phone holder to the end of the ball joint. Apply some force and it should snap onto each other.

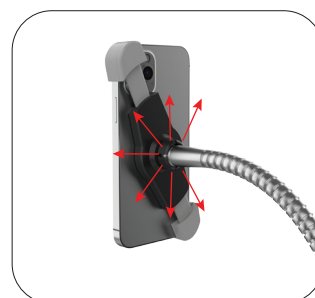

2. Adjust the tilt to preferred angle.



3. Slide the ring through the gooseneck as illustrated above, until it meets the back of the phone holder.



4. Rotate clockwise until securely tightened.