



H1090 Heckler Express Install Tabletop Stand

[In the box](#)

[Install the column to the base](#)

[Install the storage box to the column](#)

[Install the display](#)

[Install the video conference gear](#)

[Organize gear and cables](#)


[Install the felt panel](#)


[Your H1090 Heckler Express Install Tabletop Stand is now assembled.](#)

In the box

- 1 x Base (R1040)
- 1 x Column (R1039)
- 1 x Device Panel (R1038)
- 1 x Felt panel (FXXX)
- 2 x Cable trim (P218)
- 3 x M8 thumbscrew ((P119+FXXX)


- g. 1 x M10 thumbscrew (P221+**FXXX**)
- h. 4 x M8 set screw (**FXXX**)
- i. 4 x M6 set screw (**FXXX**)
- j. 4 x M8 thumbnut (P231)
- k. 4 x M6 thumbnut (P232)
- l. 4 x Display spacer (P215)
- m. 4 x M4 thumbnut (F838)
- n. 4 x M4 thumbscrew (F839)
- o. 1 x Velcro (F856)

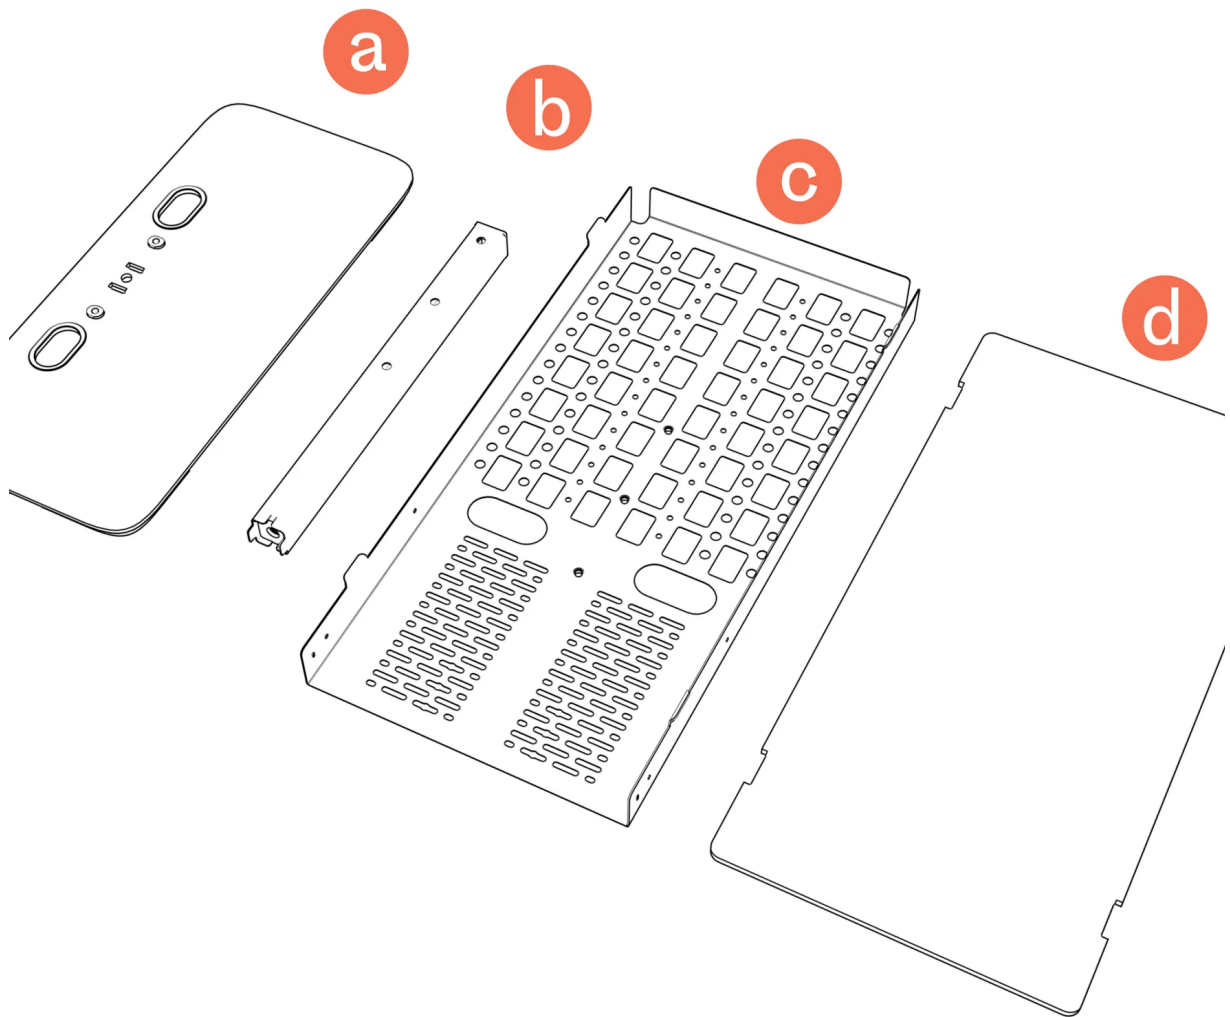


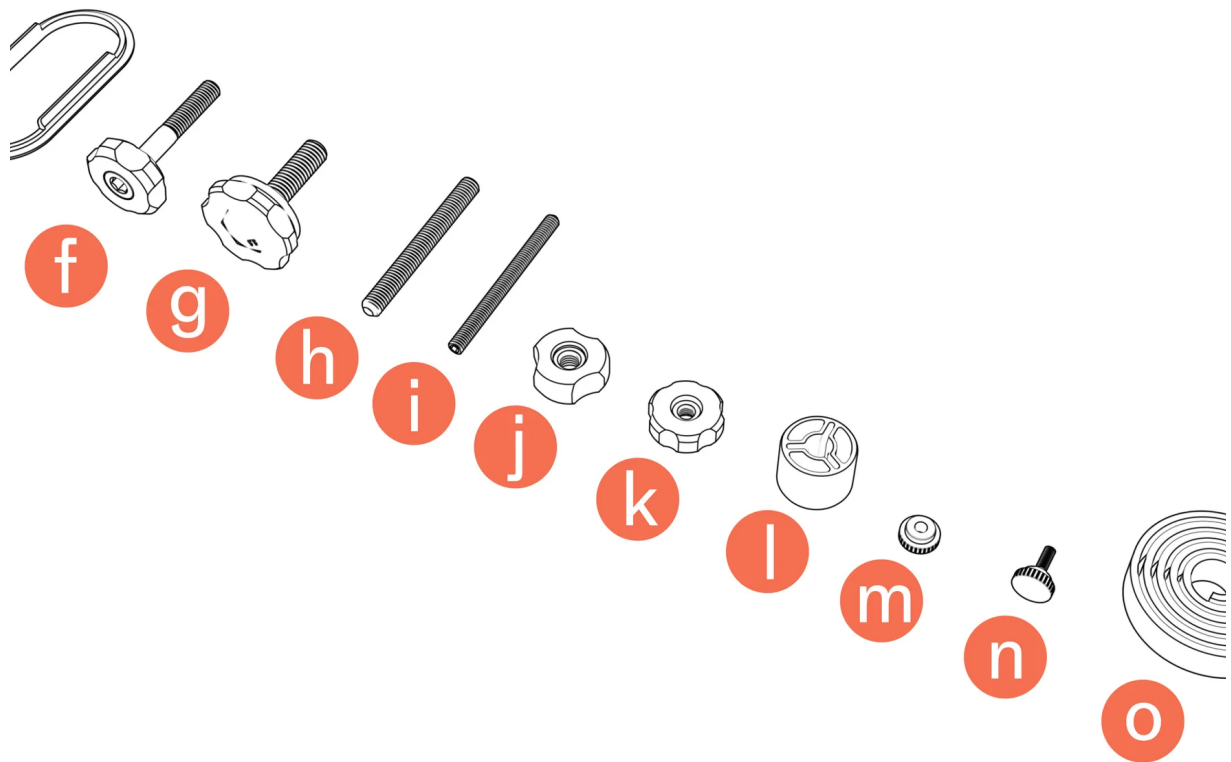


Install the column to the base

Align two tabs on the bottom of the column to the slots on the base. Use the M10 thumbscrew provide to fully fasten the column to the base.

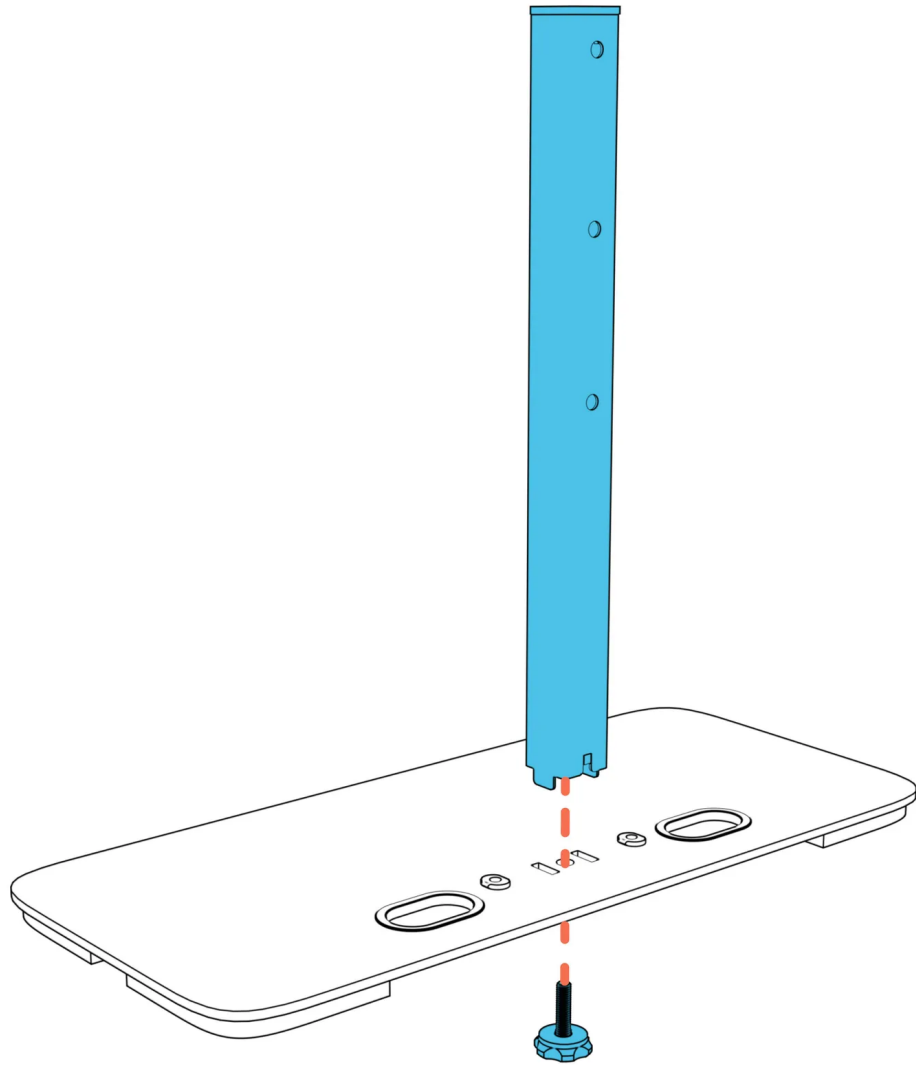


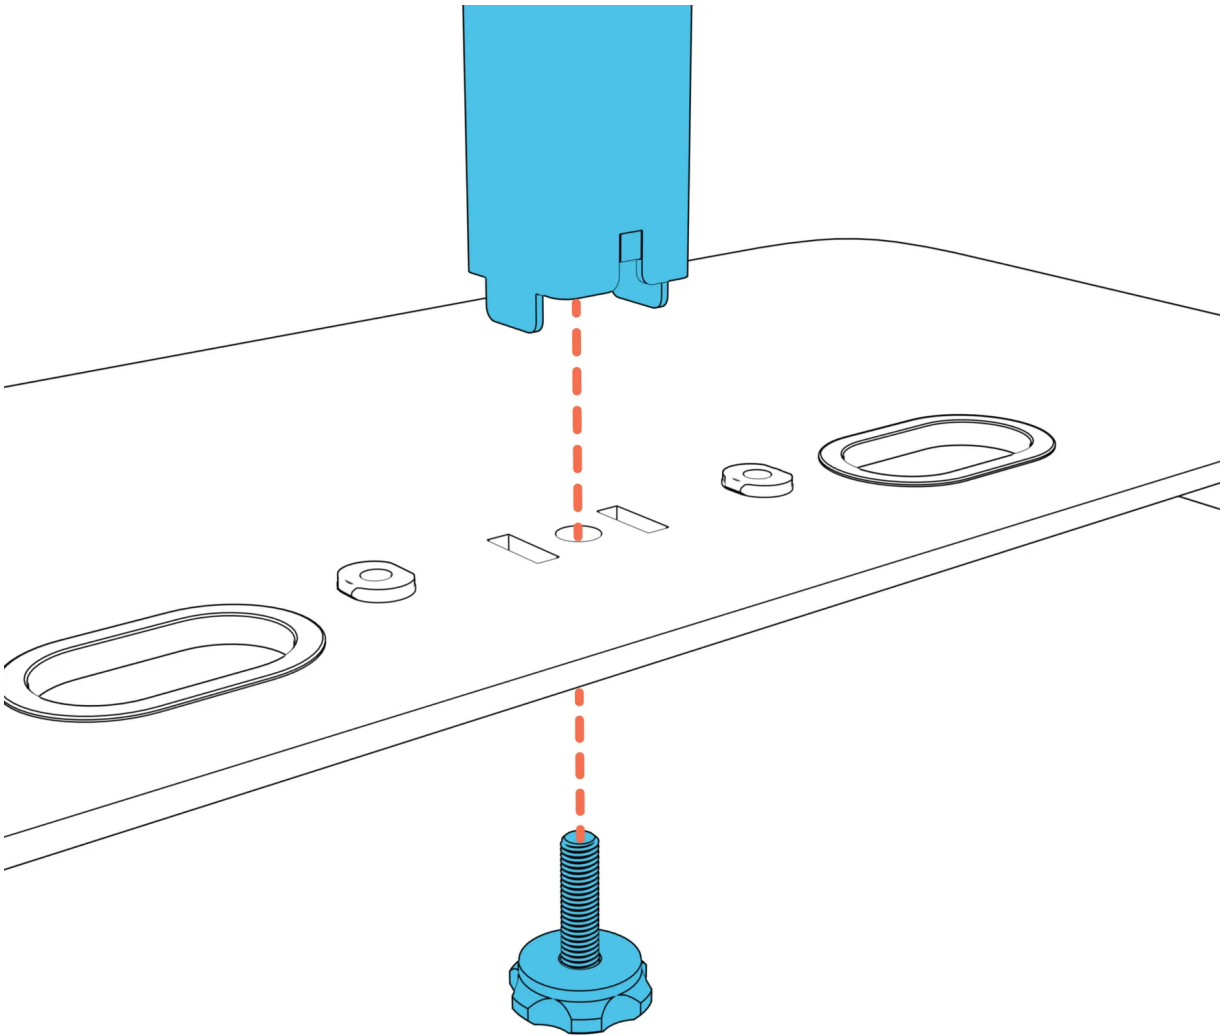


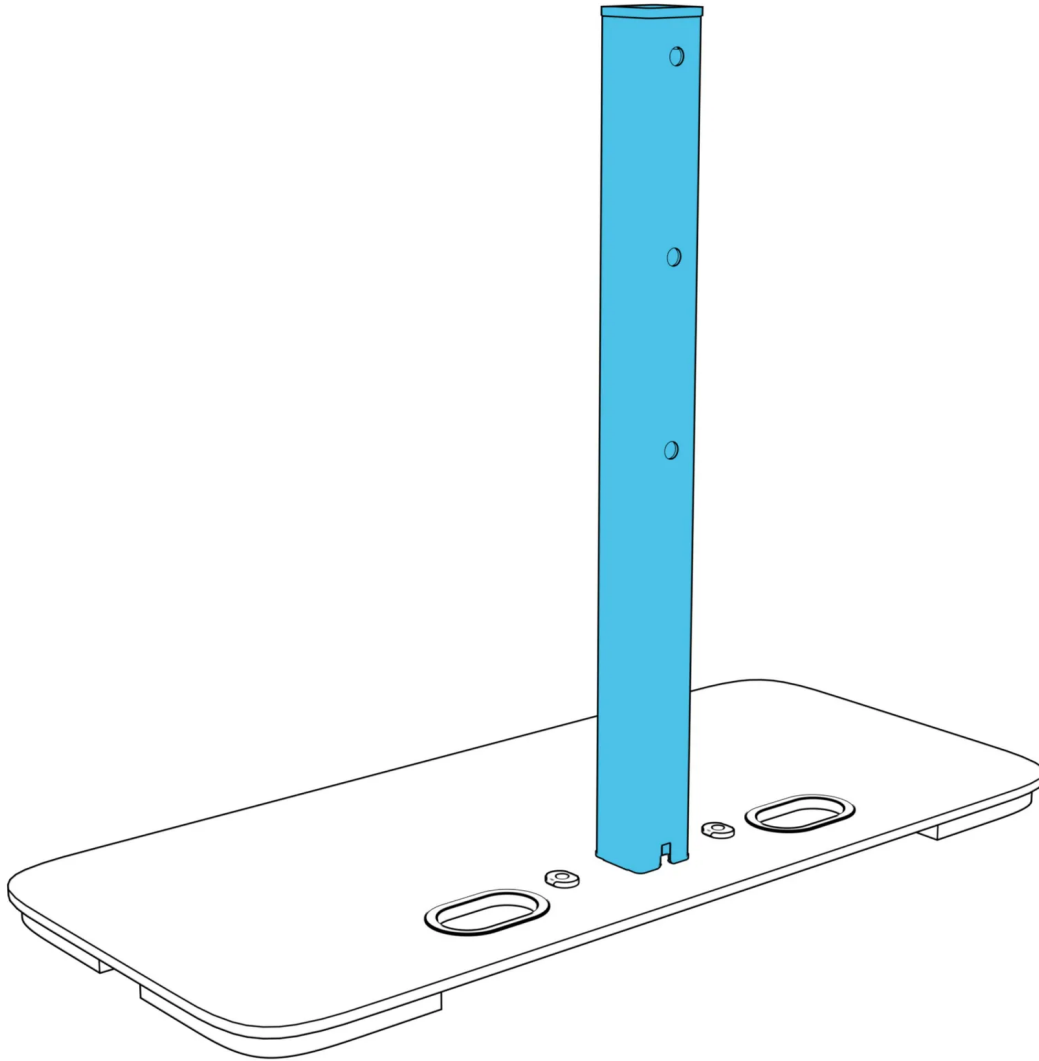

Install the storage box to the column

Install the cable trims to the storage box as shown.

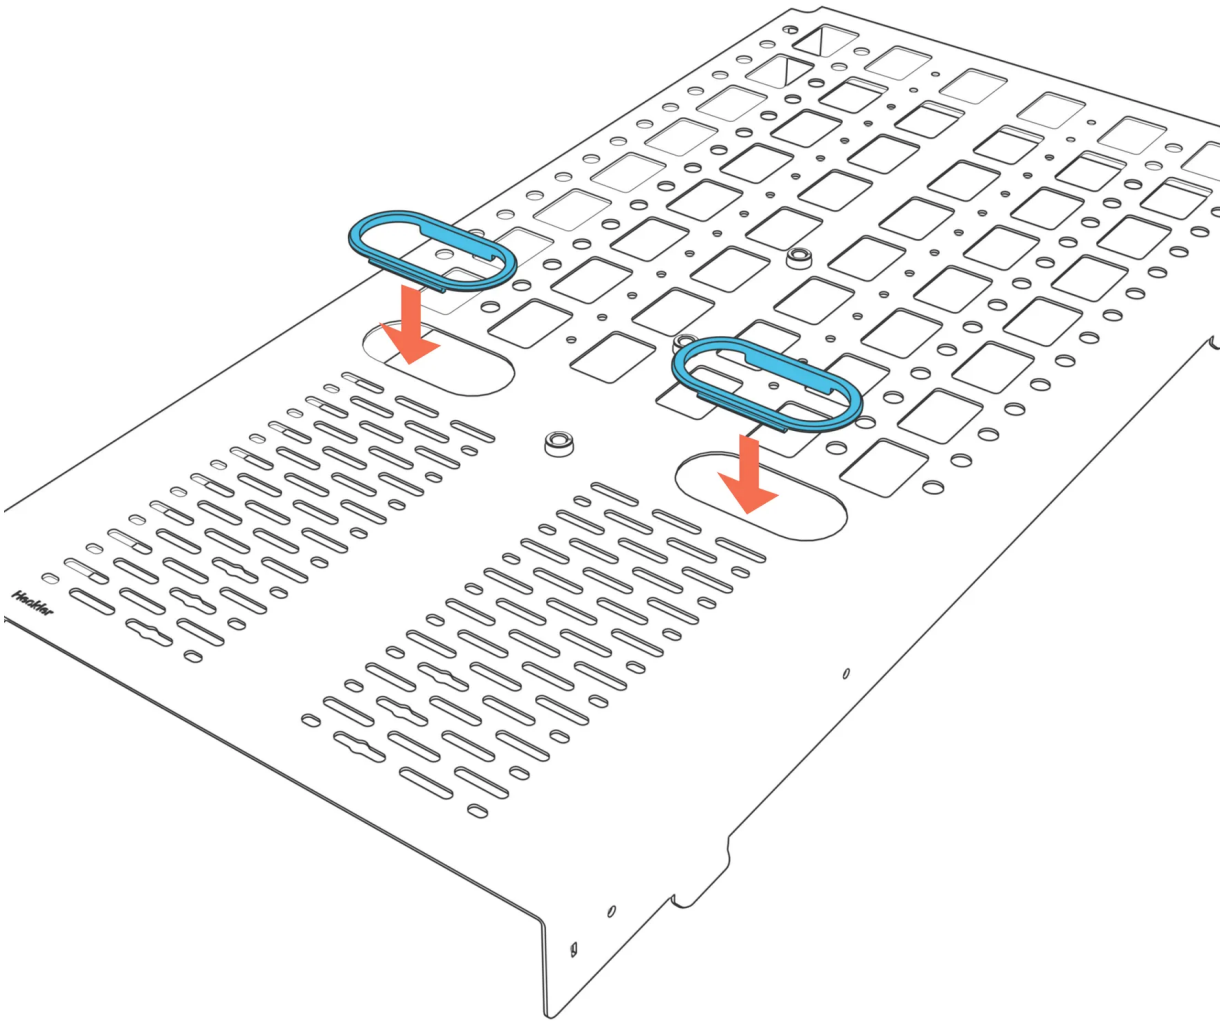

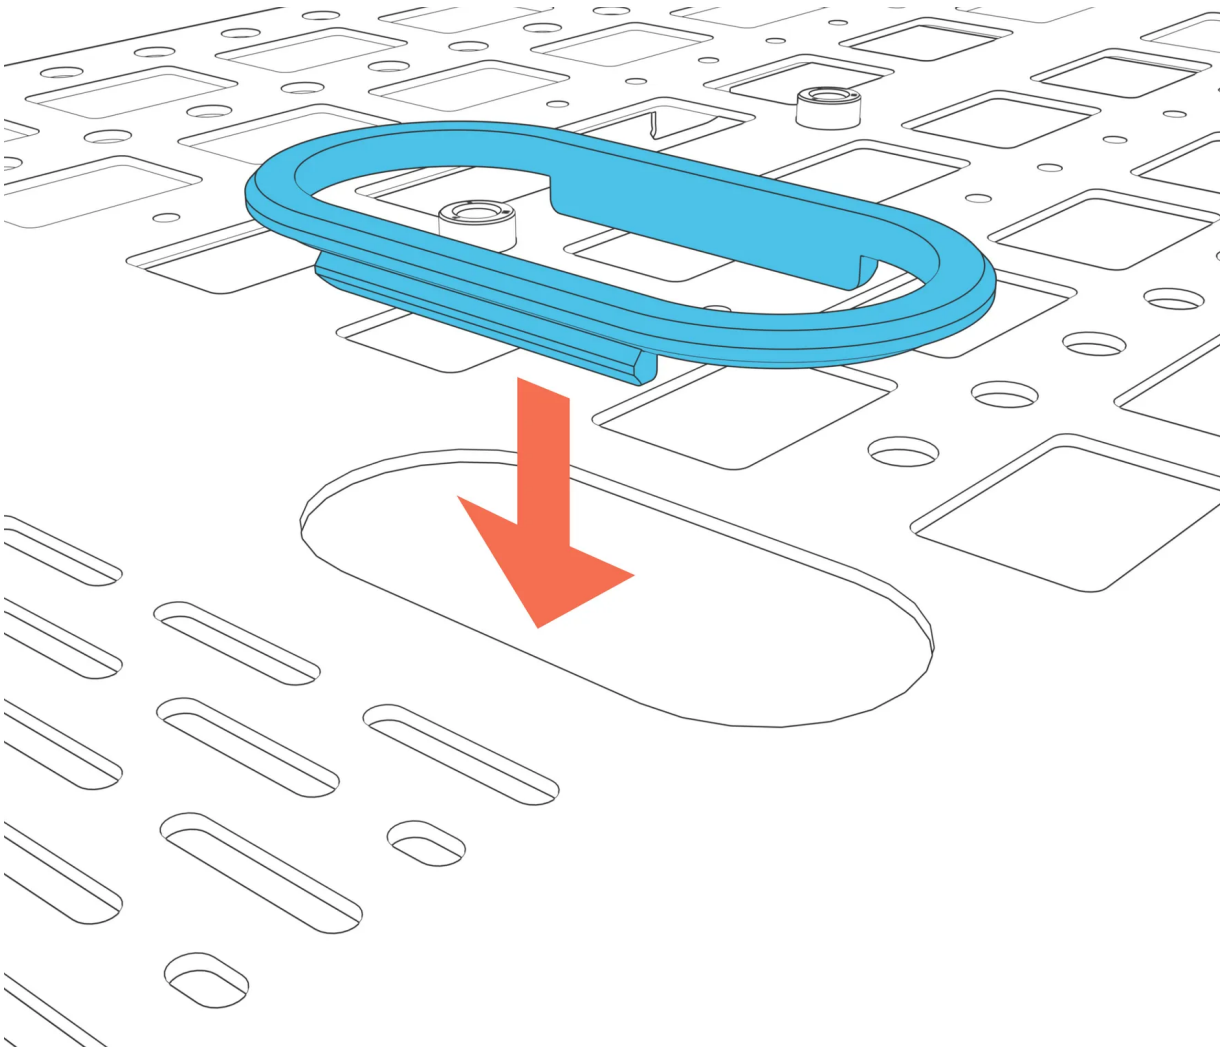





Use three M8 thumbscrews provided to install the storage box to the column as shown.



To prevent scratching the top surface of the base during this step, please the felt cover over the front two-thirds of the base.

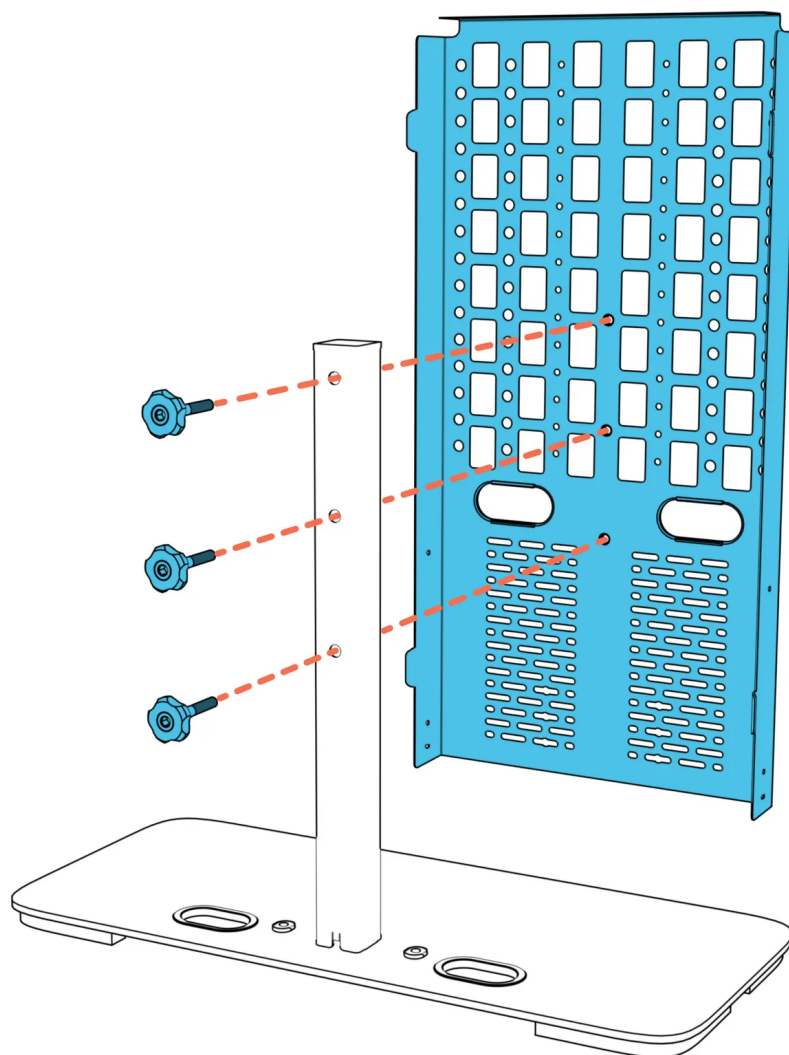

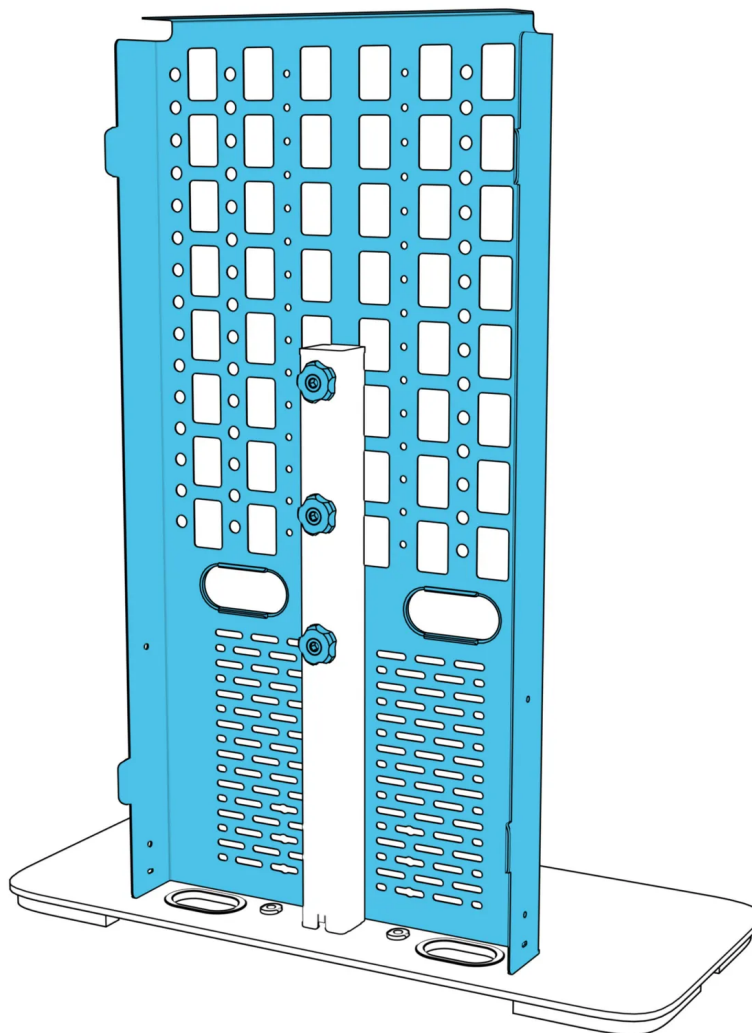

Install the display


! This stand is designed to safely mount displays with screen sizes of 55-inch or smaller, with VESA 200 and VESA 300 horizontal mounting patterns. VESA 400 mounting patterns are intentionally not supported.

Determine if your display has M6 or M8 size mounting holes.


Fasten the supplied display-mounting screws into the four VESA mounting positions on your display.



In most cases, no tools are needed for this step. Fasten by hand. If you used a tool (not included) to fasten the set screws, do not over tighten.

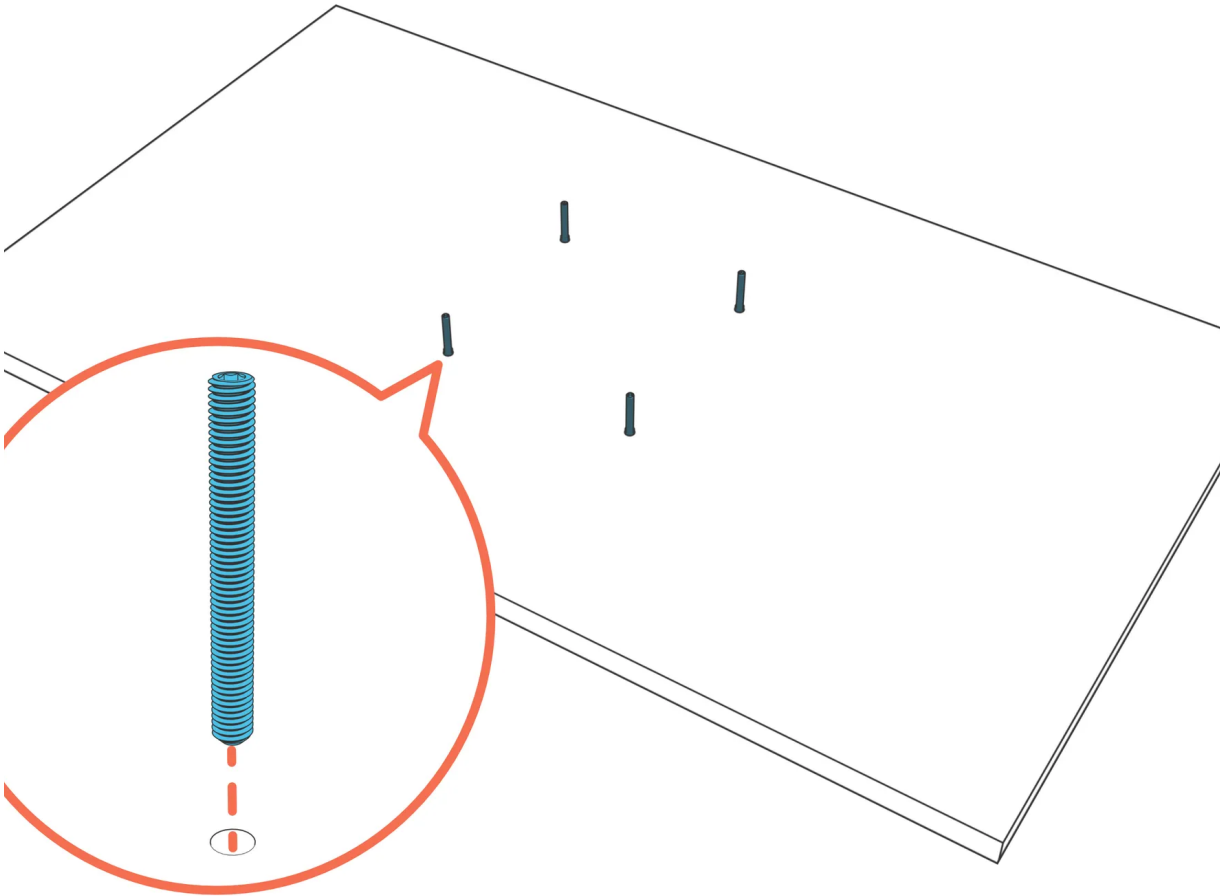


Slide down the display spacers to the set screws.

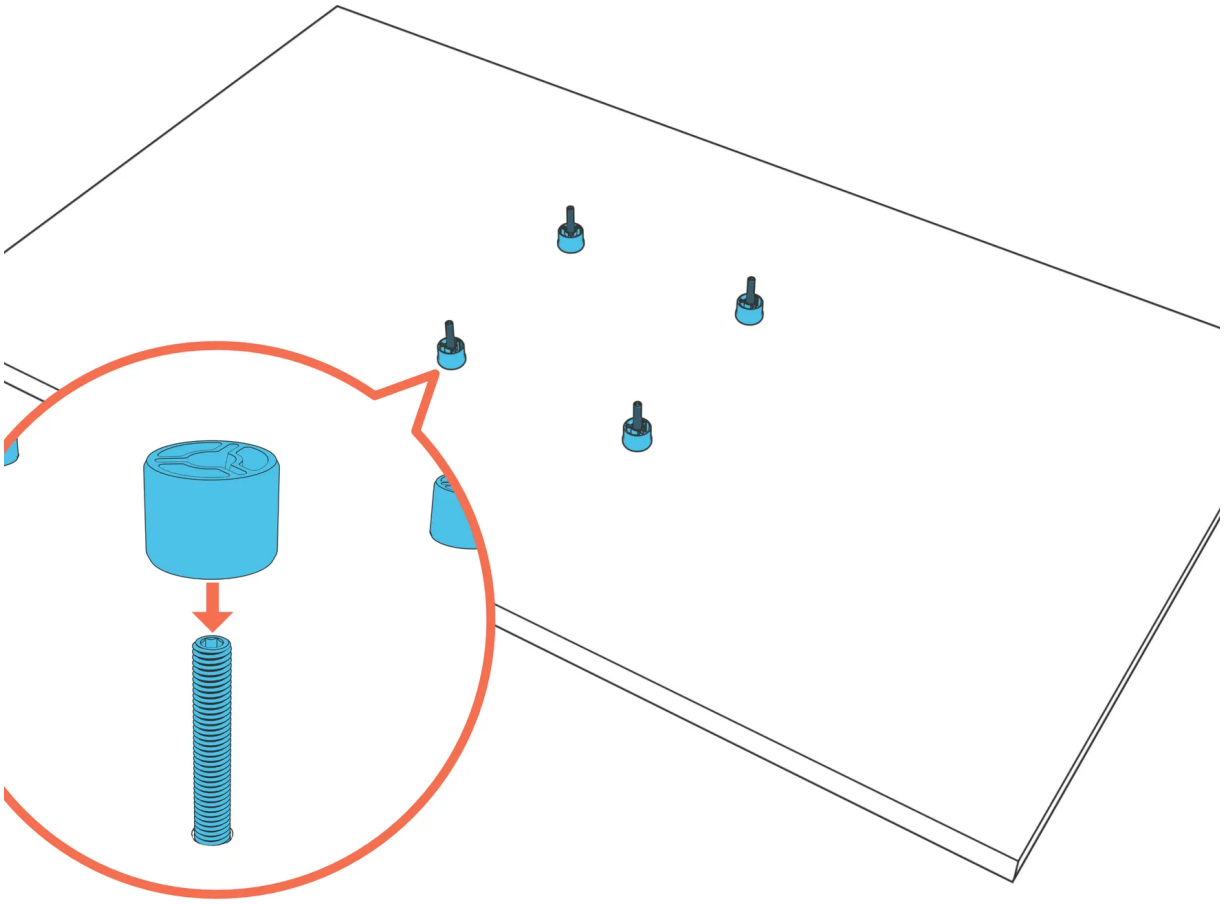


Choose the mounting position on the Device Panel based on the preferred display mounting height. Fasten the corresponding M6/M8 thumbnuts from the inside of the Device Panel.




To prevent damage to your display, once set screws are resting on the Device Panel, hold the display to the device panel with one hand while fastening the thumb nuts with your other hand.

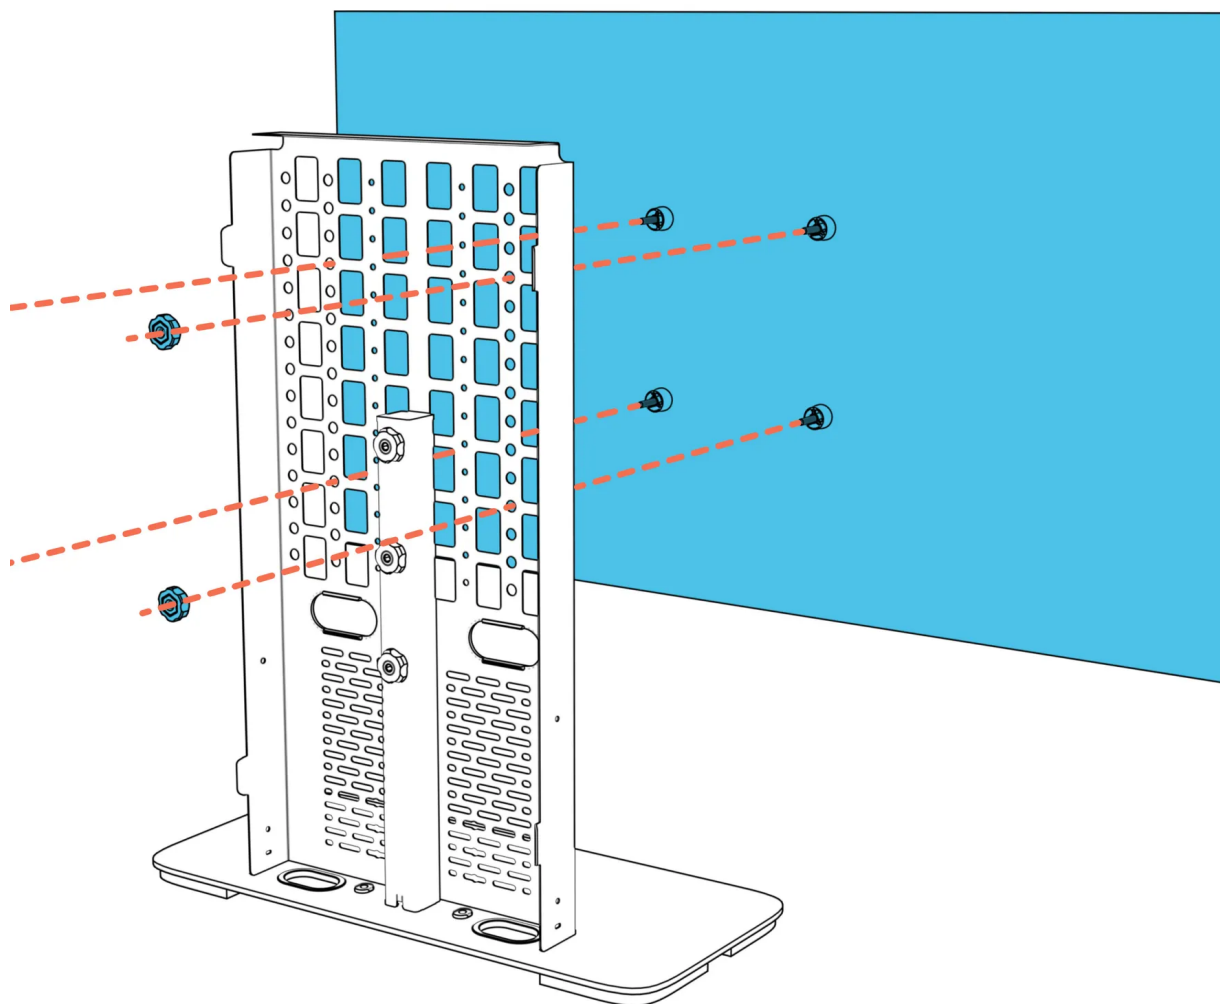


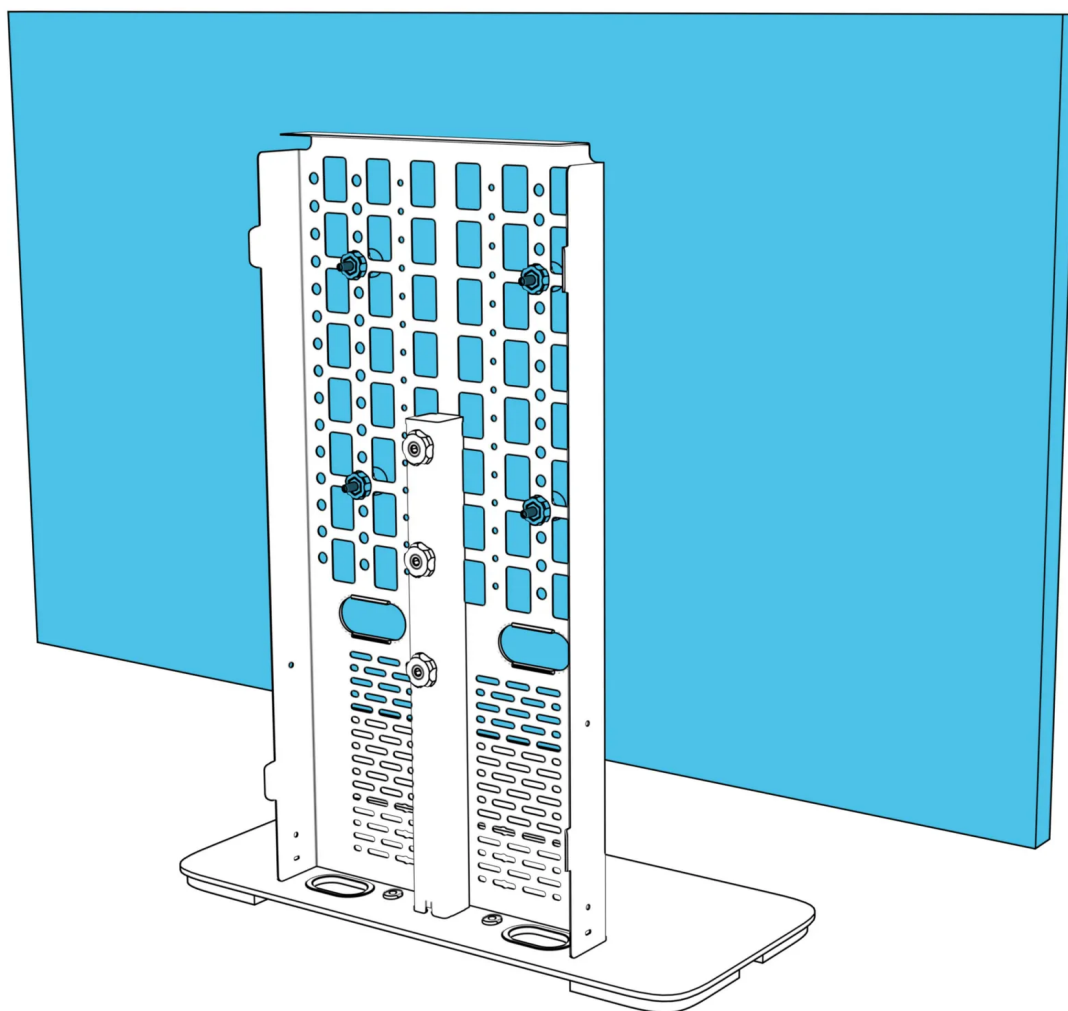

Install the video conference gear

Use the M4 thumbscrews and thumbnuts to install the wall mount of the video conference equipment (not included) as shown.

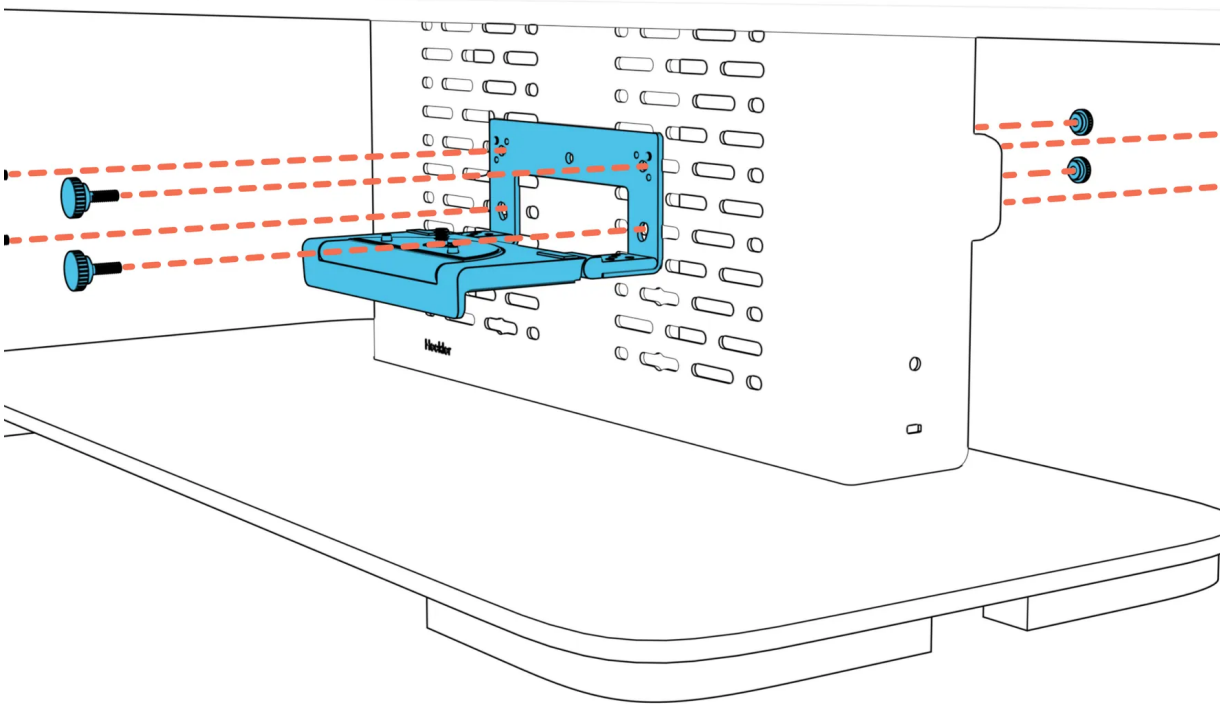

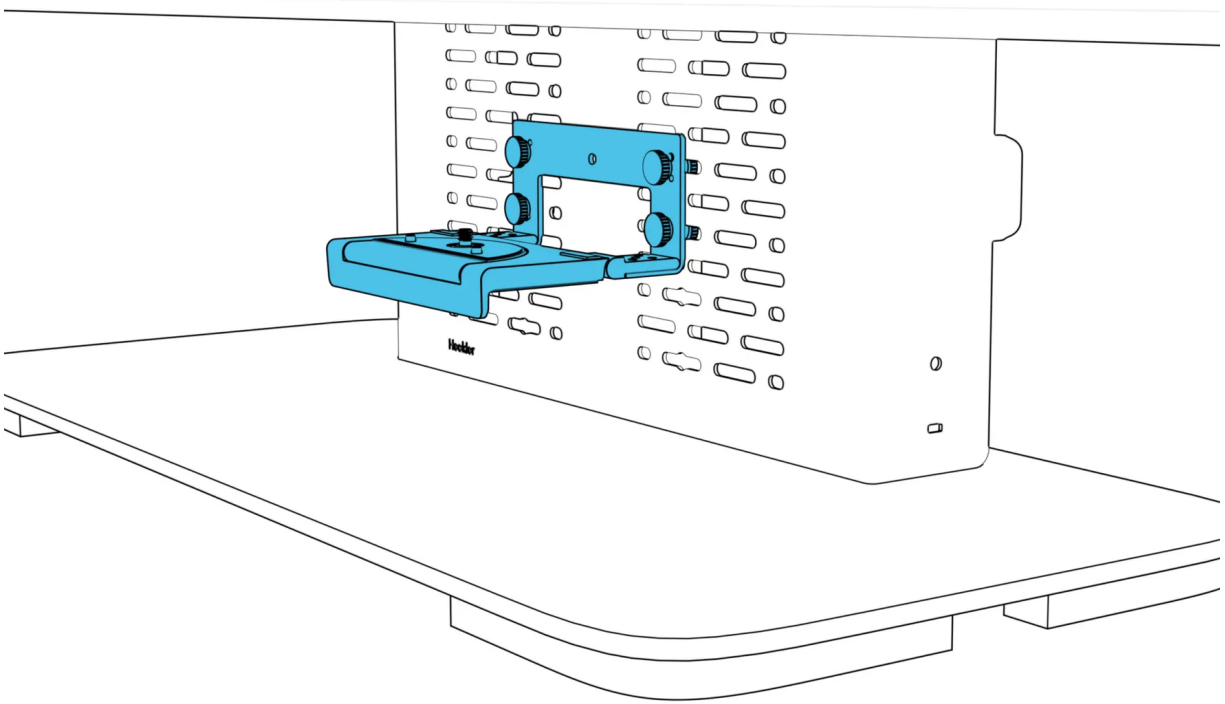

Install the video bar to its wall mount.

