



WIRELESS VIDEO EXTENDER



User manual

Model:P400

support@lemorele.com


Product Introduction

The P400 Point-to-Point Wireless Presentation System is a screencasting device that enables wireless connection between media devices and displays without relying on a Wi-Fi network. It is widely suitable for various scenarios such as conference presentations and home entertainment. Supporting high-definition wireless transmission of up to 50 meters, it offers advantages including stable connectivity, low latency, plug-and-play operation, and a compact portable design, making it an ideal wireless presentation solution for both office and entertainment use.

Specifications

	TX	RX
Resolution	1080P@60Hz	
WiFi frequency band	5GHz	
Power supply parameters	5V/2A	
Transmission distance	50m	
Housing material	ABS	
Operating temperature	0~50°C	
Power supply interface	USB-C	


Product Buttons/Ports

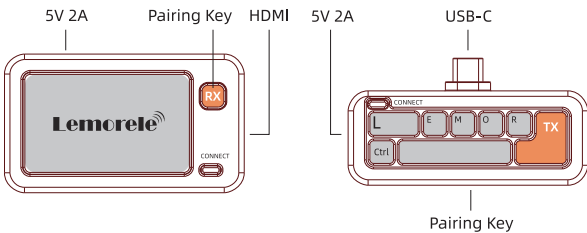

Usage Instructions

- 1.Receiver Connection and Power Supply**
Connect the receiver's HDMI port to the HDMI input port of a display device (e.g., monitor, TV) using an HDMI cable. Power the receiver using the included USB-C cable connected to a power source (5V/2A).
- 2.Switch Signal Source**
Switch the HDMI signal source of the display device to the HDMI input port where the receiver is currently connected until the device displays the startup screen, indicating the receiver has successfully started.
- 3.Connect the transmitter to a computer or other device with HDMI/USB-C video output functionality.** Wait for the transmitter and receiver to automatically complete pairing, then begin screen mirroring.

Connection Diagram

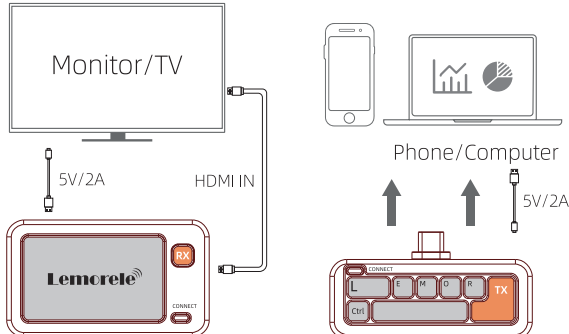

Pairing Instructions

- The devices are pre-paired at the factory and do not require re-pairing for normal use. If pairing fails due to improper operation or other reasons during use, follow these steps to re-pair:
1. Connect the receiver to the display device's HDMI port and power it on. Press and hold the pairing button on the front for 5 seconds until the indicator light flashes rapidly. The interface will display: "Pairing Timeout: 90S." The receiver enters pairing mode. Release the button.
 2. Connect the transmitter to a computer and power it on. Press and hold the pairing button on the front for 5 seconds until the indicator light flashes rapidly. Release the button. The transmitter and receiver will begin pairing.
 3. Wait until the indicator lights of both the receiver and transmitter turn solid, indicating successful pairing. Screen mirroring can now be used.

Q & A

- Q1: Can devices without HDMI ports be used?**
A: Yes. Use a converter with the corresponding interface to convert to HDMI, then connect to the screen mirroring device.
- Q2: What should I do if there is lag or stuttering during screen mirroring?**
A: Ensure there are no obstacles between the transmitter and receiver, and that they are within the connection range to improve performance.
- Q3: How to restore factory settings?**
A: If the product malfunctions, press and hold the function button on the transmitter or receiver for 20 seconds until the indicator light turns off. Then disconnect the power and restart the device to restore factory settings.

Customer Service Support

- If you need assistance, you can contact us at any time by following these steps:
1. Log in to your account and go to "Your Orders."
 2. Select "Order Issues" next to the problematic order.
 3. Send us a message via "Contact Seller."
 4. If you encounter issues during use, please contact technical support at support@lemorele.com for further assistance.