

VM-99-T
VM-150-T


V-MOUNT BATTERY
WITH D-TAP CHARGER
(99 WH, 150 WH)

User Manual

VM-99-T / VM-150-T

OVERVIEW

1. Battery level check button
2. Battery level LED indicator
Shows the remaining battery capacity.
3. USB-A output
Press the battery level check button to start charging or to power your device.
14.8 V, 10 A max output.
Connect the charger, and plug the power cord into an outlet to charge the battery.
4. D-Tap output and charging port
5. V-mount interface

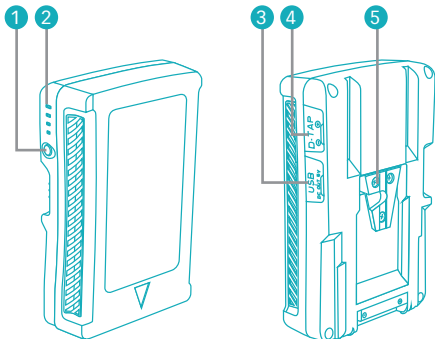

PRODUCT FEATURES

- Four-segment battery level indicators for real-time monitoring of remaining battery capacity.
- D-tap input/output connector powers your camera accessories and connects to the included charger to recharge the battery.
- USB 2.0 Standard-A connector provides 5 V / 2 A to power and charge USB devices.
- Built-in control circuit for protection against over-current, low voltage, overheating, and short circuits.

SAFETY INSTRUCTIONS

- Make sure the battery is fully charged before use.
- When the battery is not in use, remove it from any equipment. Some electronic equipment will draw current, even when the switch is off.
- Do not short-circuit the terminals. Short circuits may cause severe damage to the battery.
- Do not attempt to open the battery case under any circumstances.
- Do not remove the battery from any equipment that is powered on. Always power off your equipment before removing the battery.

- Use the battery only under proper environmental conditions: 14°F to 122°F (-10°C to 50°C) and with a relative humidity (RH) less than 85%.
- Storage environment: short-term (one month) -4°F to 122°F (-20°C to 50°C) and RH 45% to 75%; medium-term (three months) -4°F to 104°F (-20°C to 40°C) and RH 45% to 75%; long-term (one year) 23°F to 86°F (-5°C to 30°C) and RH 45% to 75%.
- The battery may be warm during use or recharging. This is normal.
- The battery should be charged up to 50% for long-term storage. After 4 months of storage, the battery will require a recharge up to 50%.
- Keep the battery out of fire, heat, and high pressure.
- Do not expose the battery to rain or moisture.
- Do not drop the battery or expose it to strong shocks.
- Keep this unit away from water and any flammable gases or liquids.
- Clean the battery and terminals with a clean, soft, and dry cloth.
- When operation time has noticeably decreased, the battery may need to be replaced.
- Keep this product away from children.
- Store the battery in a cool, dry place.

SPECIFICATIONS

	VM-99-T	VM-150-T
Mount Type	V-mount	V-mount
Chemistry	Lithium-ion	Lithium-ion
Capacity	6700 mAh / 99 Wh	10,400 mAh / 150 Wh
Output Voltage	14.8 V	14.8 V
Maximum Load	12 A	12 A
Average Runtime	4 hr. at 25 W	6 hr. at 25 W
Accessory Port	D-tap USB Standard-A	D-tap USB Standard-A
D-Tap Output	14.8 V / 10 A (max)	14.8 V / 10 A (max)
USB Output	5 V / 2 A	5 V / 2 A
Dimensions (H × W × D)	5.8 × 3.7 × 1.6 in. (14.7 × 9.4 × 4.1 cm)	5.8 × 3.7 × 2.25 in. (14.7 × 9.4 × 5.7 cm)
Weight	1.4 lb. (625 g)	2.2 lb. (975 g)

INCLUDED

- D-tap charger
- User manual

ONE-YEAR LIMITED WARRANTY

This Pawa product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of one (1) year from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function. This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Pawa Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Pawa along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.pawapower.com or call Customer Service at 212-594-2353.



Product warranty provided by the Gradus Group.

www.gradusgroup.com

Pawa is a registered trademark of the Gradus Group.

© 2023 Gradus Group LLC. All Rights Reserved.

GG3