


ZENIKO

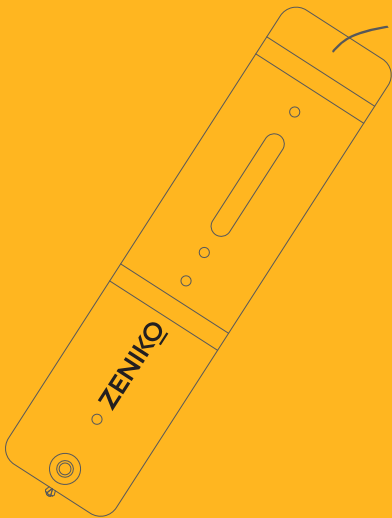

AC30C

30W Inflatable Column RGB Light

Foreword


Thank you for purchasing!

Zeniko's 30W inflatable column RGB light AC30C comes with the following features: lightweight and portable to be rolled up for easy storage, fast inflatable design to achieve large luminous surface, professional high CRI light beads to restore the true colors, 5 levels of CCT, 6 FX modes, 7 colors and 10 levels of brightness, magnets on the back to be attached on any iron surface for flexible filling light, making them perfect for shooting, live streaming and outdoor camping.

Warning

-  **Please furl the light body around the air pump in deflated status and do not press the light body hardly when storing them.**
-  **When using or storing, make sure to keep the light body away from high-temperature sources, sharp objects, highly corrosive objects, etc.**
-  Keep out of reach of children. Close supervision is necessary when any appliance is used by or near children. Do not leave appliance unattended while in use.
-  If the light beads are damaged or deformed by heat, stop using and contact the manufacturer, service agent or qualified maintenance in time to replace.
-  This appliance is not waterproof device. Keep it dry, do not immerse this appliance in water or other liquids. Do not use this appliance in rainy, humid, dusty in overheated environments.
-  Unauthorized service will void the warranty.
-  Changes made to the specifications or designs may not be reflected in this manual.

Name of Parts

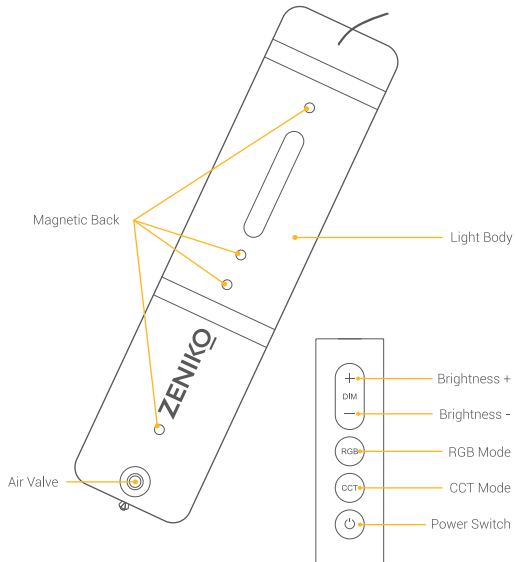

What's Inside



Light Body

*1



USB Adapter

*1



Storage Bag

*1



Instruction Manual


*1

Note: Due to continuous updates and upgrades of the products, there may be differences between the actual products and the pictures. Therefore, the pictures are for reference only, products to prevail in kind.

Instruction for Inflation

Open the air valve lid in power off status, inflate the light body with manual or electric air pump, then close the lid.

Instruction for Deflation



Open the air valve lid in power off status, press the deflating device in the middle of the air valve to deflate the light body gradually.

Power Switch

This light has two power-on modes: power switch button and plug-and-play (no need to press the power switch button). The factory default is to press the power switch button to start, i.e., connect the light to DC power source with USB-C male plug, then press the power switch button to turn on/off. Press and hold the power switch button for 1.5s in the power off state, you can switch between the two power-on modes.

Brightness Adjustment

Short press the + button in power on status to increase the brightness, while short press the – button to decrease the brightness. The brightness is adjustable in 10 levels among: 10%, 20%, 30%, 40%, 50%, 60%, 70%, 80%, 90% and 100%.

RGB Mode

After powering on, short press the RGB button to switch among the 7 colors: red, orange, yellow, green, blue, pink, purple in turn.

Press and hold the RGB button to enter the FX mode (RGB cycle, flash, party, fire, firework, and police car), short press the RGB button to switch among those effects in turn, press and hold again to exit the FX mode.

CCT Mode

Short press the CCT button in power on status to adjust CCT in 5 levels in turn: 3000K, 3800K, 4600K, 5600K and 6500K.

Input Identification

1. When the light cannot be turned on with the last memorized power due to insufficient input power, short press the power switch button three times (do not press continuously), it will boot up at the lowest brightness and the last saved CCT level.
2. When the input voltage is 5V, the maximum power is no more than 10W. When the input voltage is 9V, the maximum power is no more than 18W. Brightness and color temperature settings can still be adjusted at limited power, but there will be fewer adjustable brightness levels.

Factory Reset

Press and hold the +/- button for 1.5 seconds at the same time, and the light body will boot up at the lowest brightness and lowest color temperature.

Illuminance Data

CCT	Comdition	Unit	0.3m	0.5m	1m	2m
3000K	Bare Light	lux	2750	1520	507	143
		fc	256	141	47	13
3800K		lux	2950	1630	545	154
		fc	274	152	51	14
4600K		lux	3080	1700	566	160
		fc	286	158	53	15
5600K		lux	3170	1760	583	165
		fc	294	163	54	15
6500K		lux	3290	1820	603	170
		fc	305	169	56	16
Red		lux	1290	720	237	67
		fc	119	67	22	6
Orange		lux	1420	785	259	73
		fc	132	73	24	7
Yellow		lux	1600	885	292	83
		fc	149	82	27	8
Green		lux	2130	1170	387	109
		fc	198	108	36	10
Blue		lux	426	235	77	22
		fc	40	22	7	2
Pink		lux	879	487	161	46
		fc	82	45	15	4
Purple		lux	531	294	97	28
		fc	49	27	9	3

Note: All the data are average values instead of absolute values. All the above tests are based on the condition of 100% brightness.

Technical Data

Model	AC30C
Power Supply	12V $\overline{\text{---}}$ 2.5A/15V $\overline{\text{---}}$ 2A
Output Power	Max. $\approx$ 30W
RGB	7 Colors: red, orange, yellow, green, blue, pink, purple
	6 Effects: RGB cycle, flash, party, fire, firework, police car
CCT	5 levels: 3000K, 3800K, 4600K, 5600K, 6500K
Brightness	10 levels: 10%, 20%, 30%, 40%, 50%, 60%, 70%, 80%, 90%, 100%
CRI	Average $\geq$ 96
TLCI	Average $\geq$ 98
Working Environment Temperature	-10°C~+40°C
Light Body Dimension (excluding power cord)	31.50* 7.48*
Net Weight (including power cord) $\approx$	334g

Specifications and data may subject to changes without notice.

Declaration of Conformity

Zeniko Technology Co., LTD hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/35/EU, 2014/30/EU. They are allowed to be used in all EU member states.

For more information of DoC, Please click this web link:

WWW.ZENIKO.COM/EU/AC30C.PDF

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product Information	Model	Product Code Number
Customer Information	Name	Contact Number
	Address	
Seller Information	Name	
	Contact Number	
	Address	
	Date of Sale	
Note		

Note: This form shall be sealed by the seller.

Applicable Products

The document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items,giveaways and additional accessories attached,etc.) are not included in this warranty scope.

Warranty Period

The warranty period of products and accessories isimplemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day(purchase date) when the product is bought for the first time,And the purchase date is considered as the date registered onthe warranty card when buying the product.

How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases: **① The product or accessory has expired its warranty period; ② Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc; ③ Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alternation, addition and detachment; ④ The original identifying information of product or accessory is modified, alternated, or removed; ⑤ No valid warranty card; ⑥ Breakage or damage caused by using illegally authorized, nonstandard or non-public released software; ⑦ Breakage or damage caused by force majeure or accident; ⑧ Breakage or damage that could not be attributed to the product itself.** Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following Product Maintenance Information:

Product Type	Name	Maintenance Period(month)	Warranty Service Type
Parts	Circuit Board	12	Customer sends the product to designated site
	Electrical parts e.g.battery charger, etc.	12	Customer sends the product to designated site
Other Items	Lamp body, lamp cover, locking device, package, etc.	No	Without warranty

Zeniko After-sale Service Call: +86-755-25106331

Follow us to explore the fun of filling light.



REDnote



WeChat

Zeniko Technology Co., LTD

Add.: 1208 Room, Jinshan Building, No.5033, Shennan East Road, Xinwei Community,
Guiyuan Street, Luohu District, Shenzhen City
Tel: +86-755-25106331

www.zeniko.com

Made in China | 705-AC30C0-00

合格证
QC PASS

UK
CA

FC

C

€

