




Premium Graphic Sign Floor Stand With Security Enclosure

PAD-PARFGRA


INSTRUCTION - MANUAL

CONTENTS:

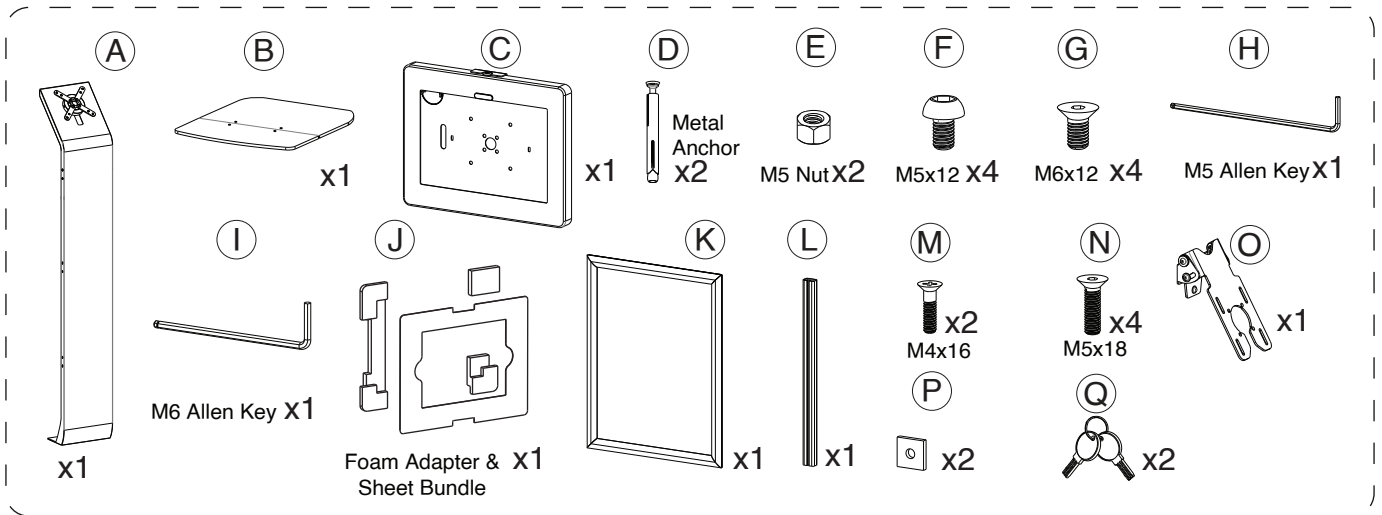


INSTRUCTIONS:

1. Assembling floorstand base

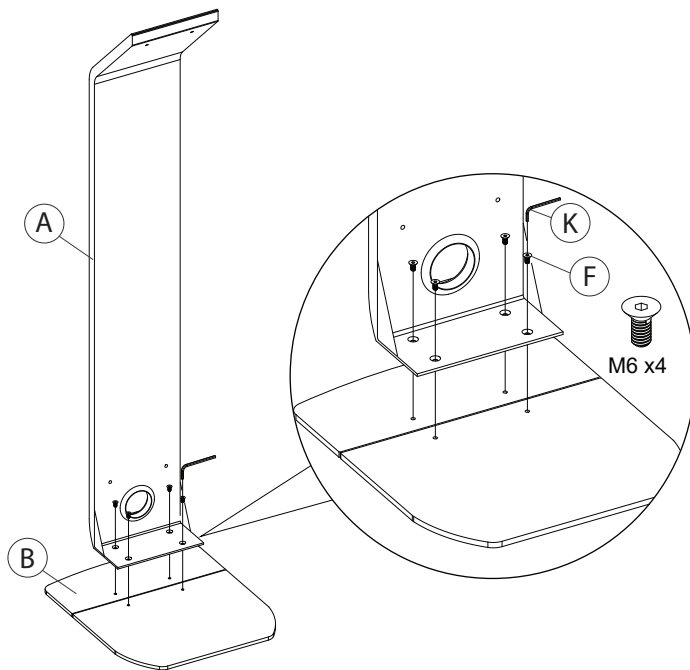

1A. Align the holes at the bottom of the body (A) with holes on the base (B) and rotate in screws (F) with provided allen tool (K) until securely tightened. Shown above.


2. Cable routing

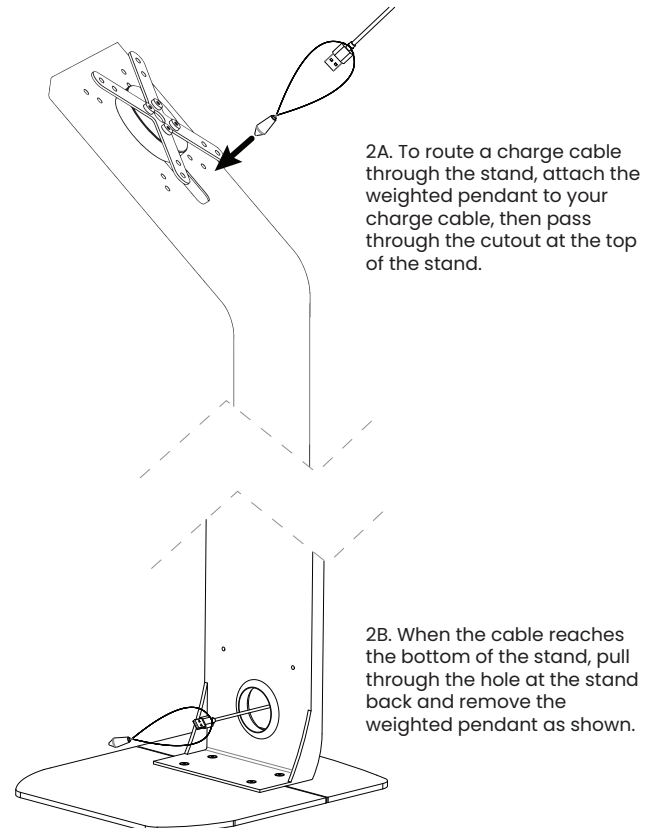


2A. To route a charge cable through the stand, attach the weighted pendant to your charge cable, then pass through the cutout at the top of the stand.

2B. When the cable reaches the bottom of the stand, pull through the hole at the stand back and remove the weighted pendant as shown.


3. Attaching bracket to graphic panel

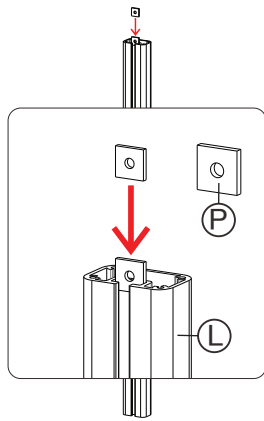


3A. Grab both mounting component (P) and slide it through the bracket (L) as illustrated.

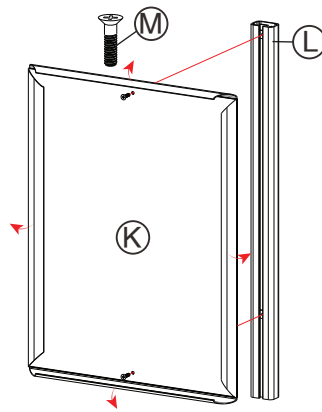


3B. Align mounting component (L) with the holes of graphic panel (K). Rotate in two screws (M) with screwdriver (not included) until securely fastened.

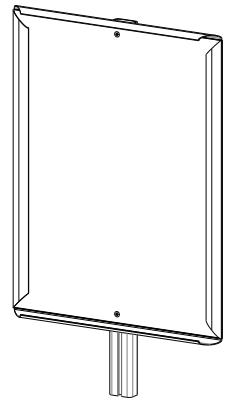


4. Attaching VESA component

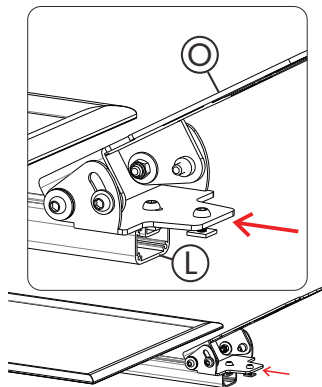


4A. Identify the VESA component (O) and slide the back side screw grooves to the U-shape of the front of the center bracket (L) as illustrated above.

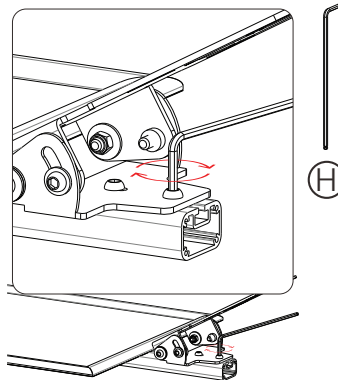



4B. When desired location is located, use provided tool (H) and rotate in front of screws as illustrated above until securely fastened.

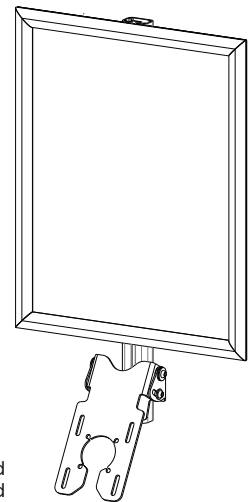

5. Attaching enclosure and ADD-GRAPHIC to VESA plate on base

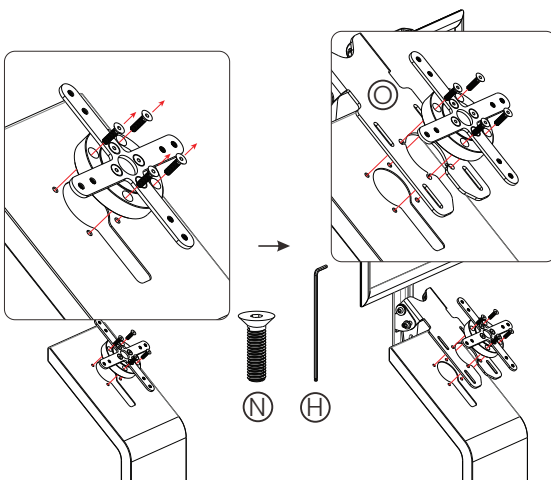


5A. Remove floorstand VESA component unscrewing the screws (N) using provided tool (H). Insert VESA bracket of graphic add-on (C). Align VESA holes of both components. Rotate back screws (F) using provided tool (H) until securely fastened. Then align VESA holes of enclosure with the threaded VESA holes in base and rotate in screws until securely fastened.

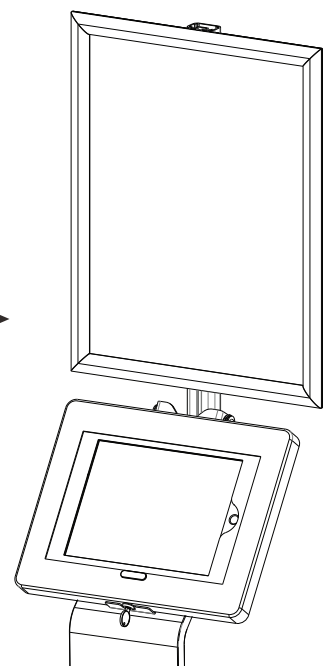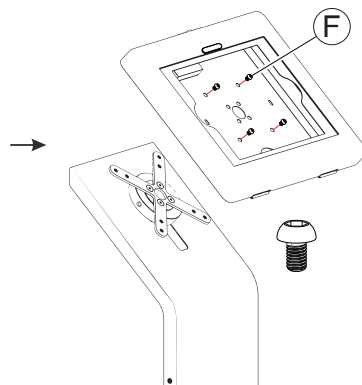

6. Setting up device & enclosure

****Tablet shown for illustration and NOT INCLUDED.**

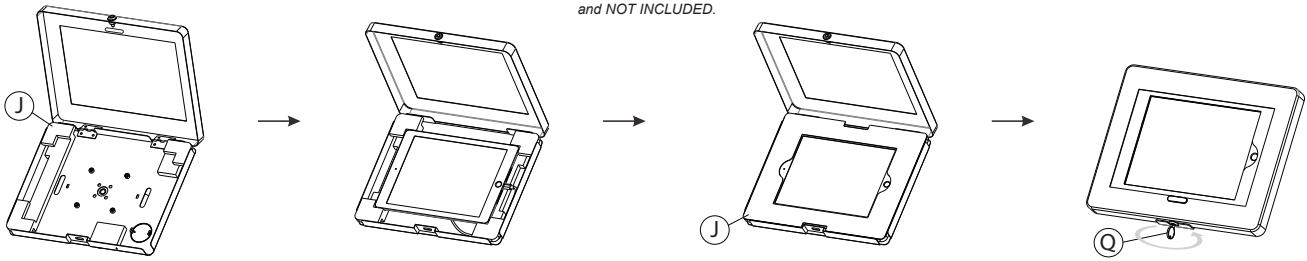


6A. Insert the appropriate foam piece (J) that is compatible with your tablet.

6B. Insert tablet as shown. Plug in power cable to tablet and cable route through the back.

6C. Place the appropriate provided tablet cover (J) to match your tablet.


6D. Close the enclosure and lock it with the included set of keys (Q).

7. Attaching Graphic Decal

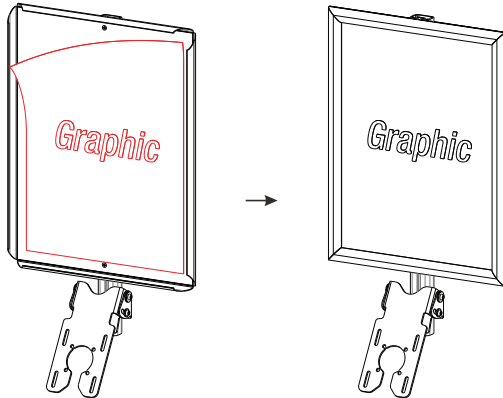


7A. Using your hands, open the edges of the frame. Place adhesive graphic onto surface as illustrated. Then close the edges of the frame when finished.

8. Adjusting Tilt Angle

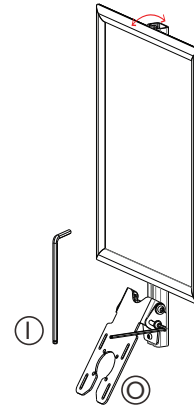

8A. Using provided tool (I), rotate side screws of VESA component (O) to loosen. Adjust to preferred tilt angle. Then rotate opposite way to tighten until securely fastened.


9. Removing Plastic Covers

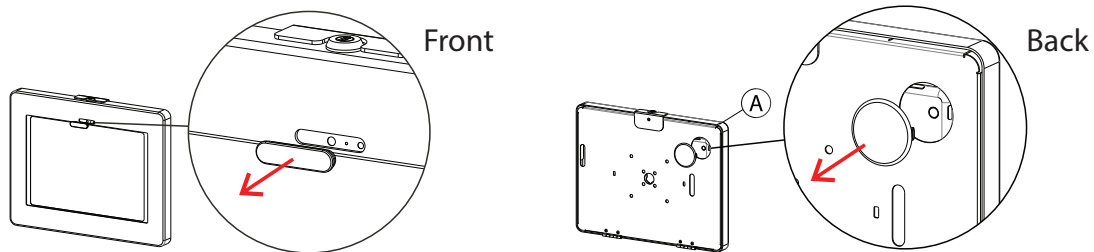

9A. Please remove the rubber front cover if you want to use iPad 10th with front camera exposed as well back cover to expose rear camera.

10. (Optional). Bolting floor stand down

****Screwdriver for Illustration Purposes Only and Not Included**

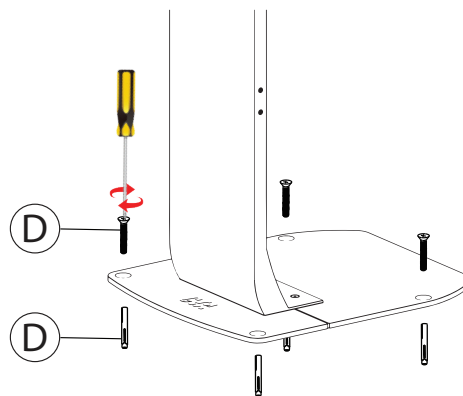

10A. Using a power drill or similar (note provided) that is the same size as your metal anchor - create a cavity in the floor. Insert the base part of the metal anchor (D), and screw in the nail component of the metal anchor (D) from above with a screwdriver (not provided) until securely tightened. Repeat for all holes.