


Product Overview

This RGB key light features multiple ways to connect, supporting Bluetooth pairing for smartphones, WiFi pairing for computers, and remote control using a Stream Deck. It comes with a 2.4G USB wireless transmitter for convenient 2.4G control. The included desktop stand makes it ideal for live gaming setups.

Package Contents



Gaming key light ×1



Power Adapter ×1



Power Cord ×1




Desktop Stand ×1



Screw Adapter ×1

Product Illustration

EN

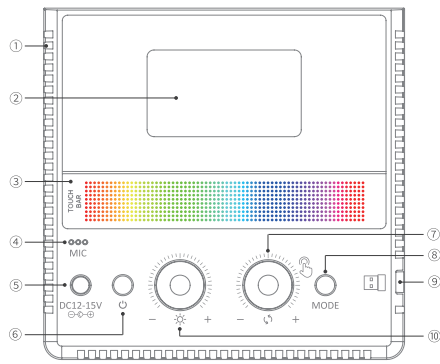


- ① Thermal Ventilation Opening
- ② Display screen
- ③ Touch bar
- ④ Microphone Input Hole
- ⑤ Power input port
- ⑥ Power On/Off
- ⑦ Settings selection (short press) / Settings adjustment (rotate)
- ⑧ Mode switch (short press) / WiFi reset (long press)
- ⑨ USB transmitter
- ⑩ Brightness adjustment

Long press "MODE" button for 5s to reset WiFi


01

EN


Installation Instructions




- ① Loosen knobs to adjust the desk mount clamp opening.



- ② Fit the clamp to a desk / table edge and rotate the lever counterclockwise until secure.




- ③ Attach the ball head to the desk mount, then attach the light to the ball head adapter.



- ④ Turn the knobs of the desktop stand and ball head adapter to adjust the height and angle.


02

How to Use

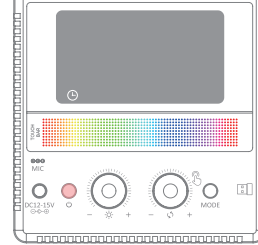

• Power On/Off and Standby


- ① Long press the " " button to turn the key light on/off.
- ② Short press the " " button to enter/exit standby mode



• Brightness Adjustment

Turn the " " knob to adjust the brightness from 0% to 100% in any mode.


How to Use

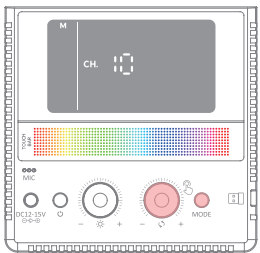

• Channel Adjustment

Short press the "MODE" button to switch to channel mode.

Then rotate the " " knob to adjust the channel from 0 to 10.

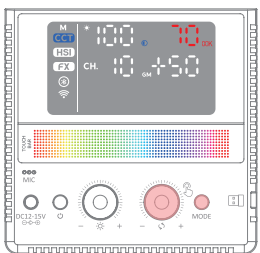

• Color Temperature Adjustment


Short press the "MODE" button to switch to CCT mode.

Short press the " " knob again and select " ".

Then rotate the " " knob to adjust the color temperature from 2900K to 7000K.

How to Use

EN

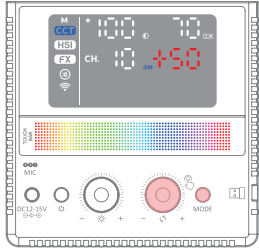


• Hue Compensation Value Adjustment

Short press the "MODE" button to switch to CCT mode.

Short press the " " knob again and select "GM".

Then rotate the " " knob to adjust the hue compensation value from -50 to +50.



• Saturation Adjustment

Short press the "MODE" button to switch to HSI mode.


Short press the " " knob again and select "S".

Then rotate the " " knob to adjust the saturation from 0 to 100.

03

EN

How to Use

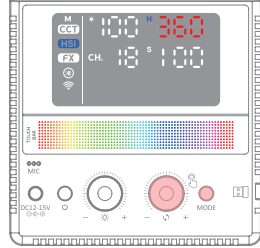


• Color Tone Adjustment (Button)

Short press the "MODE" button to switch to HSI mode.

Short press the " " knob again and select "H".


Then rotate the " " knob to adjust the hue from 0 to 360.



• Tone Adjustment (Touch Bar)

Slide the touch bar in any mode to adjust the hue.

How to Use

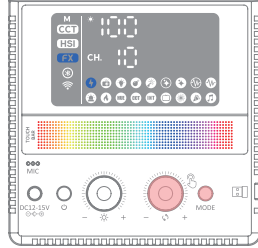


• Special Effects

Short press the "MODE" button to switch to FX mode.

Turn the " " knob to select different special effects.

Scene modes

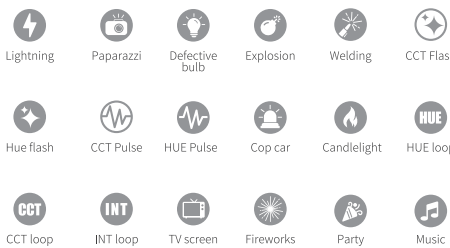

04

APP Control

1. Pairing with smartphones via Bluetooth

Suitable for PCs without WiFi adapters and devices without WiFi hotspots.

- ① Scan the following QR codes to download " NEEWER " app and sign in.



Android



iOS

⚠ For Android users, please enable the location permissions in your phone settings.

- ② Scan the following QR code to access the Bluetooth pairing instructions.



APP Control

EN

2. PC WiFi pairing

Suitable for WiFi-enabled PCs or PCs equipped with WiFi adapters / dongles.

Scan the following QR code to access the PC pairing instructions.



⚠ Before pairing, please reset WiFi connection. Press and hold "MODE" button for 5s to reset.

3. Stream Deck control

We have now developed a plugin for the Elgato Stream Deck. Download the plugin and install it in your Stream Deck to control the NEEWER light.

Scan the following QR code to access the instructions for Stream Deck control.




05

EN


APP Control

4. 2.4G Control

This light is built with a 2.4G USB wireless transmitter to control the lighting if the WiFi network is unavailable.



- ① Remove the 2.4G USB wireless transmitter from the card slot on the side of the key light.



- ② Plug the wireless transmitter into a USB port on your PC.
- ※ The wireless transmitter has an USB A type connector.

- ③ Scan the following QR code to obtain the 2.4G control instructions.



06

Safety Warnings

- 1. To avoid visual impairment, do not look directly at the light during use.
- 2. To ensure efficient heat dissipation, do not cover the vents with materials of any kind or other objects.
- 3. For Android smartphone users, please enable your location services before using the " NEEWER " app.
- 4. Do not touch the device with wet hands. Doing so will damage the circuit.
- 5. Do not disassemble the product or alter the circuit board.
- 6. Do not expose the product to direct sunlight for long periods of time.
- 7. Do not use the product in the rain or in humid environments.
- 8. Turn off the power when not in use.

Specifications

Model	GL1 C
LED quantity	144PCS
Input Voltage	DC 12 ~ 15V
Max. power	48w
Maximum Illumination	4300lux@0.5m
Color rendering index	CRI 97+
Brightness Adjustment	0 ~ 100
Color Temperature Adjustment	2900 ~ 7000K
GM value	-50~+50
Saturation	0~100
Color Tone	0~360
Channel	0~10