
Functions

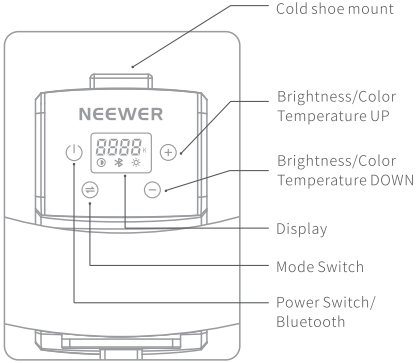

Short press "⏻" to turn the light on.

Modes

EN

Color Temperature




Short press the Mode Switch "⇌" until the color temperature icon icon "◑" appears on the display.




Short press the UP "⊕" or Down "⊖" button to adjust the color temperature from 3200K to 5600K. Long-press the "⊕" and "⊖" buttons to quickly adjust the color temperature.

Brightness



Short press the Mode Switch" ⇌ " until the brightness icon " ☼ " appears on the display.




Short press the UP "⊕" or Down "⊖" button to adjust the brightness level from 0% to 100%. Long-press the "⊕" and "⊖" buttons to quickly adjust the brightness levels.

EN


Modes

Bluetooth



Long-press the Power Switch/ Bluetooth button "⏻" for three seconds until the Bluetooth icon "✱" starts flickering on the display.


Control The LED Light Via APP



The "NEEWER" APP can be used to control the light through the Bluetooth feature of your mobile. Scan the <APP Guide> QR code on the APP cue card for more details.


When "✱" stops flashing, it indicates that the Bluetooth connection has been established.

Install the ring light




1 Light Adjusting Knob


2 Stand Fixing Knob



Mount the converter base onto the stand, then rotate the 2 Stand Fixing Knob clockwise until it's locked.




Loosening off the 1 light adjustment knob will allow you to adjust the angle of the ring light head as required.




Finally, rotate the 1 Light Fixing Knob clockwise until the light is secure.

Install the ring light


Install the converter base




1 Fixing Knob
2 Angle adjuster
3 Base Fixing Knob



Insert the 1 Fixing Knob into the socket on your camera, then rotate it clockwise until your camera is secured on the base.




Rotate the 2 Angle adjuster clockwise until the camera is completely locked in.




Mount the converter base onto the cold shoe mount on the light, and rotate the 3 Base Fixing Knob clockwise until it's locked.

Install the ring light


Install the phone holder




1 Fixing Knob
2 Angle adjuster
3 Base Fixing Knob



Insert the 1 Fixing Knob into the socket on phone holder, then rotate it clockwise until the phone holder is secured on the base.



Mount the converter base onto the cold shoe mount on the light, and rotate the 3 Base Fixing Knob clockwise until it's locked.




Finally, rotate the 2 Angle adjusterclockwise until it's locked and put your cell phone onto the holder.


EN

EN

Connect with the bluetooth remote control



Turn on the bluetooth remote control.



Activate the bluetooth on your phone.



Then find a bluetooth device called “AB Shutter3” and connect it to your cell phone.



Finally, enter the camera app on your phone to take pictures.

⚠ If the indicator on the remote doesn't light up, please check if the battery cover is loose or batteries need to be replaced.

Caution

- Please do not look directly at the light to avoid visual impairment.
- For your Android cellphone, the GPS is required to be turned on first.
- Please do not dismantle or modify the circuit of the item (unless professionally certified).
- Please use the power adapter included in the package or other cerfified power adapter.
- Please do not subject the light to any form of physical shock.
- Exposure to foreign objects may lead to the malfunction of the touch panel. Should this happen, Please switch off the light and restart,then it will resume its original setting.
- When not in use,please switch off the ON/OFF button on the power cord or unplug the light.
- For Bluetooth connection,please keep the product within 5 metres of your cellphone.

Product Specifications

Model	SRP18
LED quantity	272
CRI	97+
Lumen	0.5M 2150Lux 1M 880Lux
Color Temperature	3200-5600K(±200)
Input Voltage	DC IN 12-15V
Power	42W
Size	480*480*96mm