Package Contents

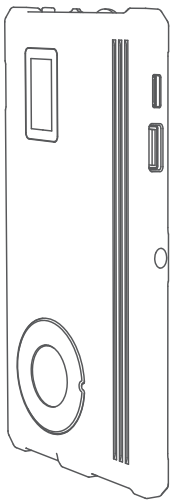

Fill Light ×1

USB-C Charging Cable ×1

User Manual ×1



Cold Shoe Adapter ×1

EN

Product Illustration

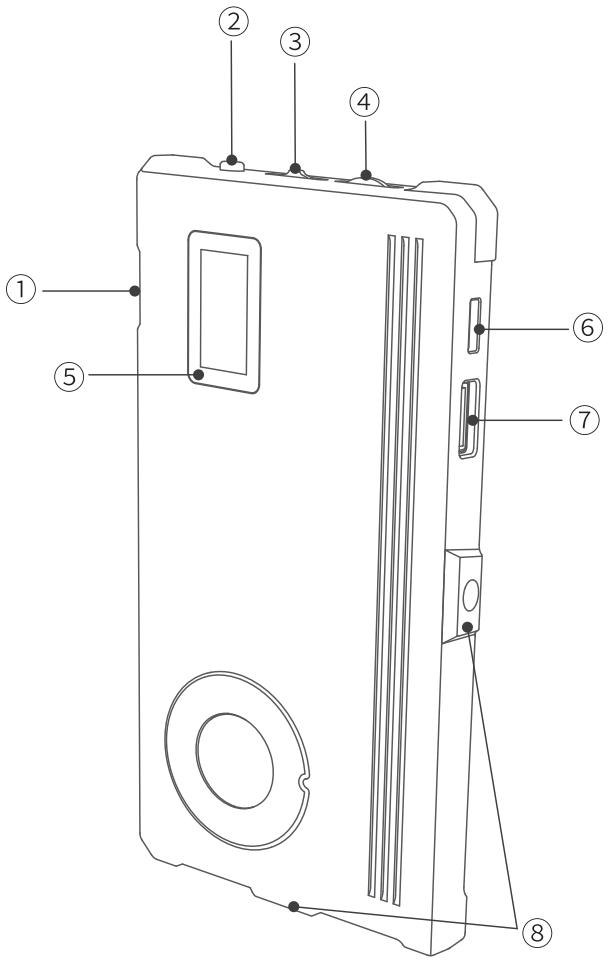

① Power Switch
② Mode Switch Button
③ Color Temperature Dial
④ Brightness Dial
⑤ Screen
⑥ USB-C Charging Port
⑦ USB-A Output
⑧ 1/4" Thread

Functions

Power On/Off	Slide the Power Switch to ON to power the light on; OFF to power it off.
CCT Mode	1: In CCT mode, turn the Color Temperature Dial to adjust the color temperature from 2700K to 7500K in 100K increments. Hold the dial for continuous adjustment. 2: Turn the Brightness Dial upward to increase the brightness Turn the Brightness Dial downward to decrease the brightness Range: 0-100%
HSI Mode	1: Turn the Color Temperature Dial to adjust the hue angles from 0° to 360° by 1° increments. Hold the dial for continuous adjustment.
	2: Turn the Brightness Dial upward to increase the brightness Turn the Brightness Dial downward to decrease the brightness Range: 0-100%
Mode Switch Button	Short press to switch between HSI, CCT, and FX modes.
FX Mode	1: Turn the Color Temperature Dial to select among 17 effects: Lightning, Paparazzi, Faulty Bulb, Explosion, Welding, CCT Flash, Hue Flash, CCT Pulse, HUE Pulse, Cop Car, Candle, HUE Loop, CCT Loop, INT Loop, TV Screen, Fireworks, Party
	2: Turn the Brightness Dial upward to increase the intensity Turn the Brightness Dial downward to decrease the i ntensity Range: 0-100%

EN

Specifications

Name: RGB LED CAMERA VIDEO LIGHT
Model: SL90C
Input: DC5V/2A
Power: 9W
Color Temperature: 2700K-7500K
Illuminance: 1090lux/0.5m
CRI/TLCI: 97/98+
Number of LEDs: 138
Discharging Time: 113min
Battery Capacity: 3.7V 4000mAh 14.8Wh