


Product Overview



- The SRP18C Slim Ring Light features a plastic light body and a metal stand mount adapter for portability and durability.
- Suitable for live streaming, vlogging, medical and cosmetic environments, and more.
- The light can be controlled using your phone or computer via Bluetooth.
- A light stand and a phone mount are included. Integrated cold shoe design to add extra accessories.

Package Contents

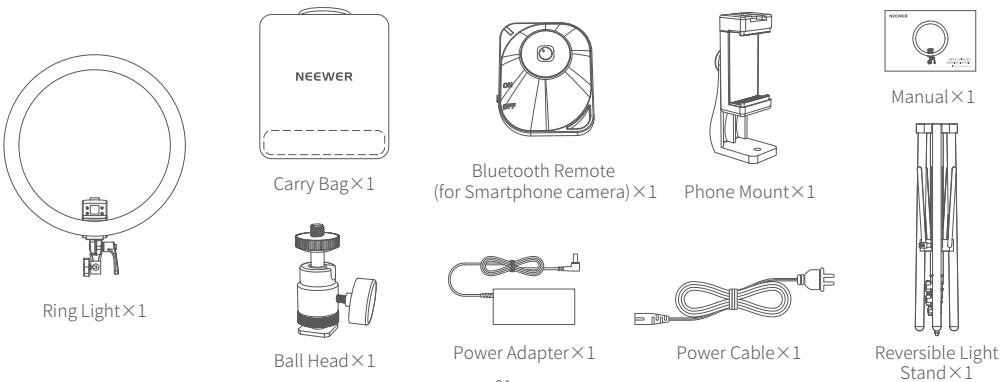


- 01 -

Product Illustration

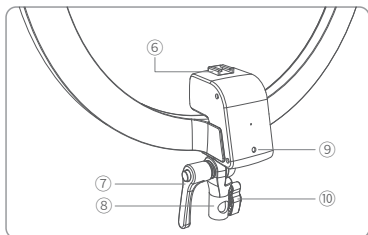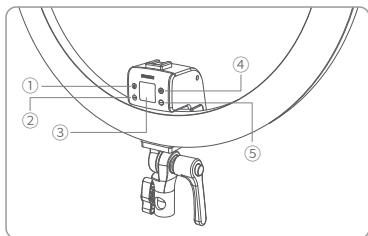

- ① ON/OFF, Sleep, Mode Selection
- ② Sub-Mode Selection
- ③ LCD Screen
- ④ Value +
- ⑤ Value -
- ⑥ Cold Shoe
- ⑦ Tilt Lock Handle
- ⑧ Stand Mount
- ⑨ Power Input
- ⑩ Support Bracket Tightening Screw


Control Panel

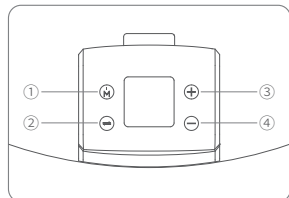


- ① On/Off & Mode Selection:**
Long Press "Ⓜ" Button: powers device on and off.
Short Press "Ⓜ" Button: selects modes.
 - ② Sub-Mode Selection:**
Short Press "Ⓜ" button: selects sub-modes in the current mode.
 - ③ Value +:**
Short press "⊕" button: Increases values by "1" in the current mode.
Long press "⊕" button: Increase values by "10" in the current mode.
 - ④ Value -:**
Short press "⊖" button: decrease values by "1" in the current mode.
Long press "⊖" button: decrease values by "10" in the current mode.
- Note: Should the ring light enter sleep mode when using the app, short press any button to wake up the device.**

- 02 -


Setting-up the Ring Light

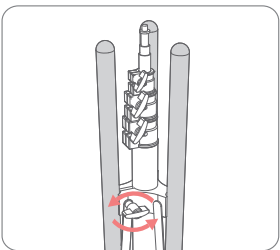


1. Loosen off the screw knob in order to spread out the light stand's legs. The legs should be positioned at an appropriate angle to ensure the stability of the stand before re-tightening the screw knob.

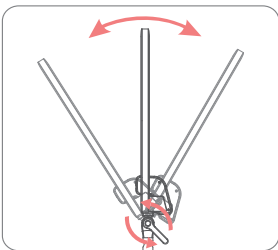

3. Loosen the tilt lock handle by pressing its button, then rotate it counterclockwise for angle adjustment.

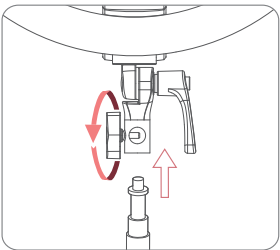


2. Mount the ring light on the top piece of the stand and tighten the stand mount lock. The black protective cap should be removed.

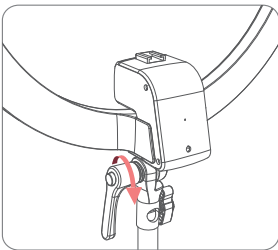


4. Set the angle, return the tilt lock handle to its original position to secure it in place.

- 03 -


Installing the mini ball head adapter

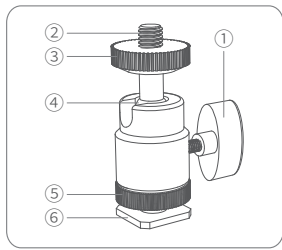


- ① Ball Head Lock
- ② 1/4" Screw
- ③ Locking ring
- ④ Metal Ball
- ⑤ Cold Shoe Lock
- ⑥ Cold Shoe

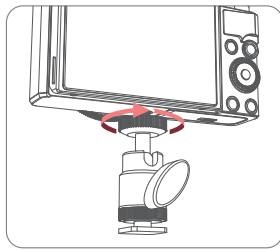

2. Align the 1/4" screw with the 1/4" hole of the device you wish to use, then turn the locking ring to secure the device.

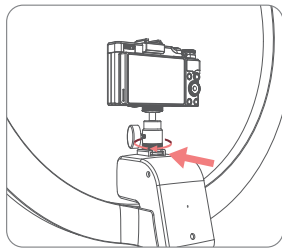


1. Slide the square base piece (cold shoe) into the groove, then turn the locking ring until it is firmly secured.

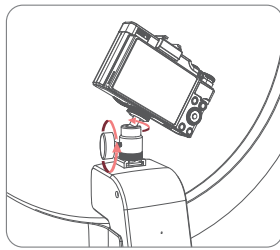


3. Loosen the ball head lock to rotate the ball head at 360°.

- 04 -


Installing the Phone Mount

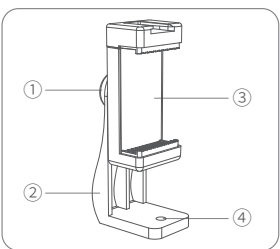


- ① Clamp Lock
- ② Base
- ③ Phone Clamp
- ④ 1/4" Thread

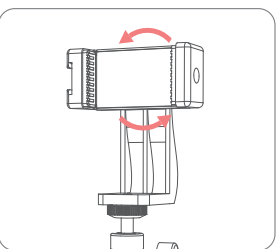

2. Loosen the clamp lock to rotate the phone mount by 360°.

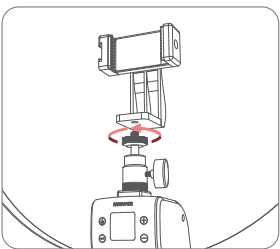

1. Ensure the mini ball head adapter has been mounted.
Align the 1/4" threaded hole of the phone mount with the mini ball head screw, then rotate the phone mount clockwise to tighten.

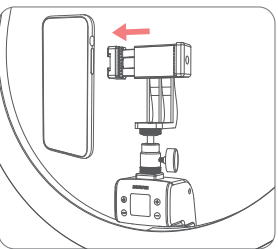


3. Expand the phone clamp to accommodate mobile phones of various sizes.


- 05 -

Power Supply

Connect the power cable and the power adapter. Plug the power cable into a wall socket and the connector into the ring light's power input jack.

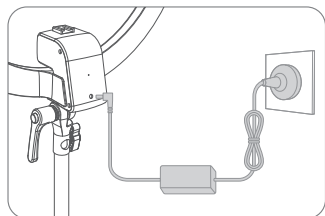


App Control

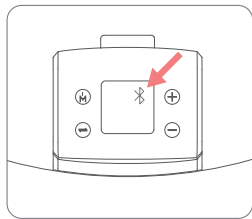


After pairing the ring light with your phone via Bluetooth, you can use the "NEEWER APP" for lighting control. (For detailed instructions, please scan the QR code from the "APP Prompt".)
The "Ⓜ" icon will remain dim when Bluetooth is disconnected and lit when Bluetooth is connected.

Pairing with Bluetooth Remote

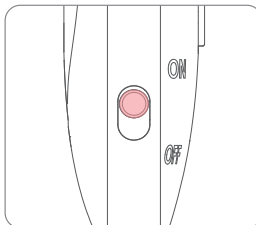

Turn on the remote, then go to the Bluetooth settings on your phone to discover and connect to the device name "NEEWER Shutter".

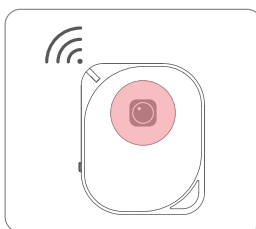


Open your phone's camera app and press the shutter release button to take photos.


⚠ If the indicator doesn't light up, please check if the battery cover is loose or replace the battery

- 06 -


Light Modes

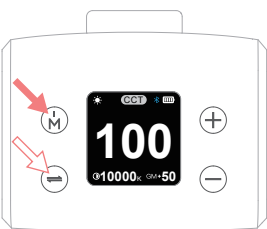

CCT Mode:
Long press "Ⓜ" button to turn on the ring light. Then short press "Ⓜ" button to select CCT mode.
Short press "Ⓜ" button to cycle through "Brightness/Color Temperature/GM" sub-modes.
Short press "⊕/⊖" buttons to adjust values.

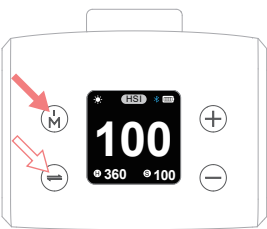


HSI Mode:
Short press "Ⓜ" button to select HSI mode.
Short press "Ⓜ" button to cycle through "Hue/Saturation/Intensity" sub-modes.
Short press "⊕/⊖" buttons to adjust values.

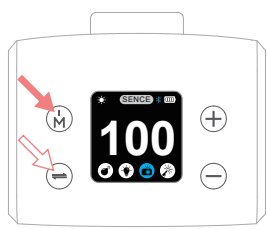

SCENE Mode:
Short press "Ⓜ" button to select SCENE mode.
Short press "Ⓜ" button to cycle through 18 scenes.
Short press "⊕/⊖" buttons to adjust values.

List of Scenes:

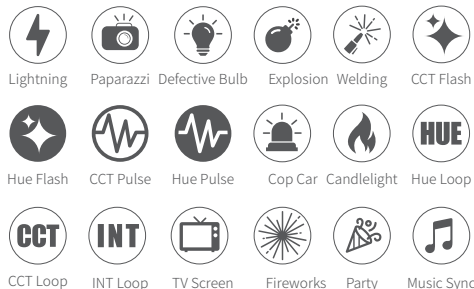

- 07 -

Safety Guidance

1. Avoid direct eye contact with the light to prevent damage to vision..
2. Never attempt to disassemble or repair the product yourself as it may result in personal injury.
3. Always use the provided or certified power cables and power adapters.
4. Do not clean with alcohol or liquid.
5. Handle with care. Avoid hitting, colliding, and dropping the product.
6. Do not exposure to direct sunlight for long periods of time.
7. Unplug the power cable when not in use.
8. Clean with a soft, dry cloth.
9. Not adhering to the above will automatically invalidate the warranty.

Battery warning

1. Do not attempt to detach, modify, and repair the battery by yourself. Any unauthorized operation may cause battery leakage, overheating, burning, and other hazards.
2. Be sure to use the provided or certified chargers to prevent overcharging and shortcuts.
3. If unusual charging speed and indicator flashing occur, please stop charging and contact our customer service immediately.
4. Keep away from inflammable and explosive items.

Specifications

Model	SRP18C
CRI	95+
TLCI	97
Number of White LEDs	288 pcs
Number of Yellow LEDs	288 pcs
Number of RGB LEDs	288 pcs
Color Temperature	2500-10000 K
Input Voltage	DC 15V/4.8A
Power	55W
Maximum Illuminance	3700 lux / 0.5m
Bluetooth Range	20 m
Dimensions	18.9"x22.8"x3.8"/480x580x95.5mm

- 08 -