



Oben®

MTTAC-13

Granite Series
Mini Tripod with Ballhead



You're on steady ground®

Thank you for choosing Oben

The MTTAC-13 is a substantial mini tripod and dual-action ballhead that provides a sturdy and secure tabletop platform for cameras and accessories.

Robust aluminum construction delivers a 13-pound weight capacity. The included ballhead features an Arca-style quick-release plate for rapid camera mounting and swapping. Adjustable two-section legs with three preset leg locking angles provide a nine-inch height range for precise positioning; and the integrated bubble level ensures the camera will be parallel with the horizon.


The ballhead features two 90-degree notches to instantly switch from landscape to portrait orientation. The 360° pan base includes degrees etched into the aluminum for shooting accurate panoramic shots.

**Warnings:**

- *Do not exceed the tripod's maximum load capacity (see Specifications).*
- *Ensure that all appropriate locks are engaged when necessary.*
- *This tripod should be used only in temperatures between -22°F and 140°F (-30°C and 60°C).*
- *Dry the tripod off if it becomes wet.*
- *Remove the camera from the tripod during transport.*
- *Always support your device or camera with one hand when loosening the ballhead lock or adjusting the height.*
- *All images are for illustrative purposes only.*

Visit our website at **ObenSupports.com**
for more Oben products.

OVERVIEW

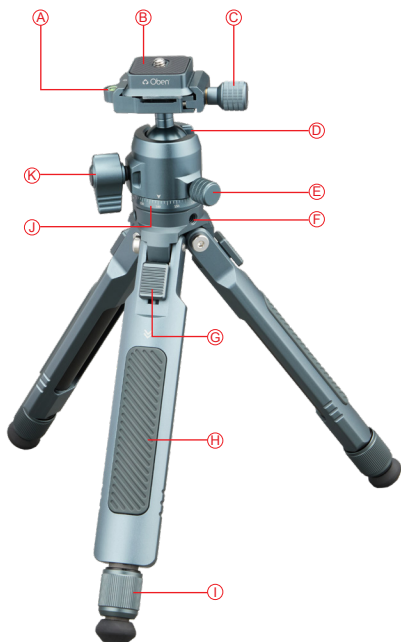

- Ⓐ Bubble level
- Ⓑ Quick-release plate
- Ⓒ Quick-release knob
- Ⓓ 90° notch (×2)
- Ⓔ Pan lock
- Ⓕ 1/4-20 accessory socket (×3)
- Ⓖ Three-angle leg lock
- Ⓗ Textured hand grip
- Ⓘ Leg twist lock
- ⓵ 360° panoramic base
- Ⓚ Ballhead Locking knob

Mounting a Camera to the MTTAC-13



1. Turn the quick-release knob counterclockwise to open the clamp and remove the quick-release plate.



2. Screw the quick-release plate into the bottom of the camera.



3. Tighten the screw into the camera's socket.



4. Mount the camera to the ballhead by sliding one edge of the quick-release plate into the clamp. Then lower the other side until the quick-release plate is lying flat in the clamp.

5. Turn the quick-release knob clockwise to lock the plate in place.

Warning! Some manufacturers' plates do not meet our specifications and may not lock your equipment securely in the Oben quick-release clamp. Test any camera and lens plates made by manufacturers other than Oben to ensure compatibility before use.

Ballhead Operation

The locking knob locks and unlocks the ballhead and allows for rapidly changing camera position.

If the attached camera or device prevents the locking knob from turning, pull the ratchet style knob out to reposition, then release it so it reengages with the lock.

Use the 90° notches to quickly switch between landscape and portrait orientations.

Important! Always use one hand to secure the camera while adjusting the ballhead and be sure the lock is engaged before letting go of the camera.



Panoramic Base



1. Twist the pan lock counterclockwise to loosen the base and turn the base to the desired position.
2. Twist the pan lock clockwise to tighten until secure.

Leg Length Adjustment



1. Turn the twist lock counterclockwise to loosen the leg segment and adjust the leg to the desired length.
2. Turn the twist lock clockwise to lock the leg.

Leg Angle Adjustment

Each leg can be adjusted to three preset angles.

1. Press the leg lock down to unlock the leg angle.
2. Spread or close the legs to the desired angle. Make sure the lock clicks into place to prevent slipping or wobbling.



Handheld Operation

Fold the legs to use the tripod as a handheld mount for devices like cameras, LED lights, or microphones. For extra reach, extend the legs to the desired length.



Removing the Ballhead from the Tripod



Use the tripod as a stationary stand for cameras, lights, and accessories like recorders, monitors, or wireless transmitters.

1. Turn the pan lock clockwise to secure the pan base.



2. Unscrew the ballhead from the tripod.

SPECIFICATIONS

Maximum Load	13 lb. (5.9 kg)
Maximum Height	14.3 in. (36.3 cm)
Minimum Height	5.5 in. (14 cm)
Folded Length	12.3 in. (31.2 cm)
Weight	1.5 lb. (680 g)
Leg Sections	2
Leg Angles	3
Ballhead	Dual-action
Quick-Release Plate	Arca compatible
Material	Aluminum, Carbon fiber

Five-Year Limited Warranty

This Oben product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of five (5) years from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function. This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state. To obtain warranty coverage, contact the Oben Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Oben along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.obensupports.com or call Customer Service at 212-594-2353.



Product warranty provided by the Gradus Group.
www.gradusgroup.com



Oben is a registered trademark of the Gradus Group.
© 2026 Gradus Group LLC. All Rights Reserved.