M MOUSE

PS01 User Manual

INFTYLAB

V1.0

Copyright and disclaimer

Copyright

Copyright 2026 BenQ Corporation. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of BenQ Corporation.

All other logos, products, or company names mentioned in this manual may be the registered trademarks or copyrights of their respective companies, and are used for informational purposes only.

Disclaimer

BenQ Corporation makes no representations or warranties, either expressed or implied, with respect to the contents of this document. BenQ Corporation reserves the right to revise this publication and to make changes from time to time in the contents thereof without obligation to notify any person of such revision or changes.

It is the sole responsibility of the user if problems (such as data loss and system failure) occurred due to non-factory installed software, parts, and/or non-original accessories.

The screenshots and illustrations in this document are for reference only and may differ from the actual design.

This document aims to provide the most updated and accurate information to customers, and thus all contents may be modified from time to time without prior notice. Please visit the website for the latest version of this document.

Servicing

Should you have any queries about the product after reading the document, visit the local website from INFTYLABSupport.BenQ.com for more support and local customer service.

INFTYLAB Support

Table of contents

Copyright and disclaimer 2
Package contents 6
Product overview 8
  Front 8
  Rear 9
Quick start 10
  Power on the mouse 10
  Connect to your computer 10
    Connect with the Wireless Receiver PS01R .. 10
    Connect with Bluetooth 11
  Customize your mouse 11
Connections 12
  Wireless connections 12
    Connect with the Wireless Receiver PS01R .. 12
    Connect with Bluetooth 13
    Switch between connected devices 14
  Wired connection 14
    Connect with USB-C cable 14
Check battery status 15
Charge your mouse 16
  Charge with the USB-C cable 16
  Charging time and battery time 16
Care and maintenance 17
  Cleaning 17
  Storage 17

Specifications.....18
Status Lights 20
Front status light.....20
Connection lights.....21
Bluetooth.....21
Wireless Receiver 22

Package contents

Before you get started, make sure your package includes everything listed below. If anything is missing or damaged, please contact your point of purchase for assistance.



1



2



3



4



5

No.	Descriptions
1.	Mouse
2.	USB-C to USB-A adapter
3.	Wireless Receiver PS01R (USB-C dongle)
4.	USB-C cable
5.	User documents • Quick start guide • Regulatory statements • Warranty card

Note

- Save the original box and packaging materials in case you need to transport your mouse in the future.
- Keep your mouse and its accessories away from small children.
- For USB-A ports, use the included USB-C to USB-A adapter to connect the Wireless Receiver PS01R.


Product overview

Front



No.	Descriptions
1.	Front status light
2.	Top button
3.	Scroll wheel
4.	Right click
5.	Back button
6.	Thumb wheel / Forward button
7.	Left click
8.	USB-C port • For charging • For connection with USB cable in wired operation


Rear

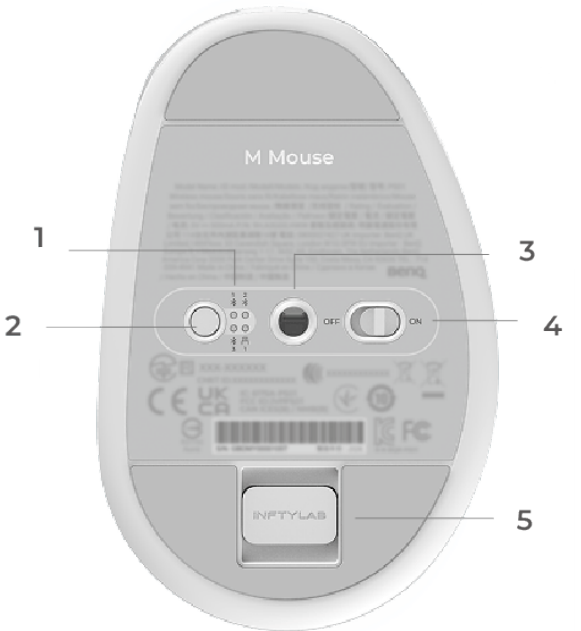

No.	Descriptions
1.	Connection lights
2.	Pairing button
3.	Sensor
4.	Power switch
5.	Wireless Receiver PS01R (USB-C dongle)

Quick start

You can also visit INFTYLAB Glide for the online guided setup.

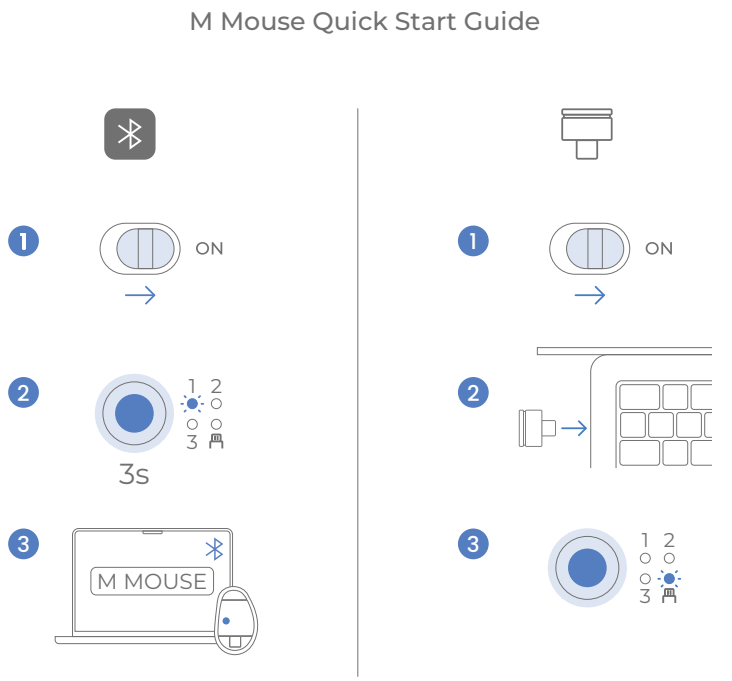

Power on the mouse

1. Slide the power switch to turn on your mouse.
2. The front status light glows solid blue for 5 seconds.

Connect to your computer

Choose how you want to connect your mouse:

Connect with the Wireless Receiver PS01R

1. Plug the Wireless Receiver PS01R into a USB port on your computer.
2. Press the pairing button to select the wireless receiver connection light.

3. The light glows solid blue for 5 seconds when successfully connected.

Connect with Bluetooth

1. Press and hold the pairing button for 3 seconds until the connection light blinks rapidly.
2. Open Bluetooth settings on your computer and select M Mouse PS01.
3. The light glows solid blue for 5 seconds when successfully connected.

Customize your mouse

Go to inftylab-glide.benq.com/tutorial in your web browser to configure your initial settings.

To unlock more advanced customization, including button remapping and advanced tracking, follow the on-screen prompts to download the **INFTYLAB Glide** app for macOS and Windows.

Connections

Connect the mouse wirelessly or with the supplied USB cable.

Wireless connections

Choose your preferred wireless connection method and check the lights on the rear of the mouse for connection status. (See Connection lights for details).



Connect with the Wireless Receiver PS01R



1. Plug the Wireless Receiver PS01R into a USB port on your computer.
2. Press the pairing button to select the wireless receiver connection light.
3. The light glows solid blue for 5 seconds when successfully connected.

ⓘ Tips

- For optimal performance, use the mouse within 1 meter of the USB receiver (maximum effective range is 10 meters).
- Keep the Wireless Receiver PS01R at least 2 meters away from other signal interference such as wireless routers.

Connect with Bluetooth



1. Press and hold the pairing button for 3 seconds until the connection light blinks rapidly.
2. Open Bluetooth settings on your computer and select M Mouse PS01.
3. The light glows solid blue for 5 seconds when successfully connected.


Switch between connected devices

Short press the pairing button on the rear of the mouse to switch between your connected devices. You can connect up to 3 devices via Bluetooth, and 1 device via the Wireless Receiver PS01R.

The switch order is: Bluetooth 1 > Bluetooth 2 > Bluetooth 3 > Wireless Receiver PS01R > Bluetooth 1.

Wired connection

Connect with USB-C cable

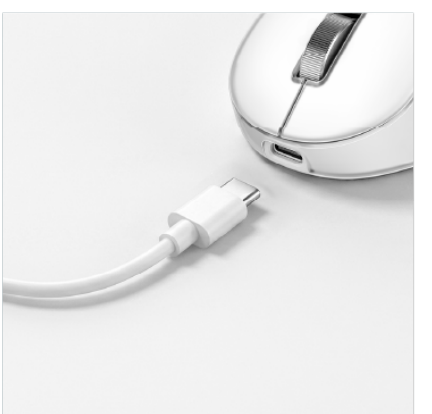

Connect the mouse to your computer using the supplied USB cable.

Note

Connecting the mouse to a PC via USB automatically switches it to wired mode and begins charging, overriding the bottom mode switch.

Check battery status

You can check the battery level by looking at the status light on the front of the mouse.



Icon	Light	Status
	Solid red	Low battery (15% or less)
	Breathing blue	Charging
	Solid blue	Fully charged

Note

The status light remains off during normal operation and will only illuminate when the battery is low.

Charge your mouse

Charge with the USB-C cable

Use the supplied USB-C cable to charge the mouse. During charging, refer to the status light on the front of the mouse.



Charging time and battery time

It takes approximately 3 hours to fully charge the mouse.

Polling rate	Battery time (with constant movement wirelessly)
125 Hz	Up to 2 months

Note

Actual battery life varies depending on polling rate and usage conditions.

Care and maintenance

Cleaning

- Dust or debris on the sensor can affect tracking performance. Gently clear the area using a clean, dry brush.
- To clean the exterior of your mouse, wipe it with a soft, lint-free cloth. Avoid getting moisture in any openings, as liquid on the sensor can cause tracking issues.

Storage

If you are traveling with your mouse or storing it for a long period, pack it carefully to prevent damage to the components:

1. **Power down**: Fully charge the mouse, then slide the power switch to off to preserve battery life.
2. **Disconnect**: Unplug the USB cable from both your computer and the mouse.
3. **Secure the cable**: Use a cable tie to wrap the cord loosely, avoiding tight bends that could damage the connectors.

Specifications

Item	Description
Product name	INFTYLAB M Mouse PS01
MSRP	$99.99
Ergonomics (size)	Comfortable for small to medium hand sizes
Weight	85 g
Buttons	**Front** • Left click • Right click • Thumb wheel / Forward button • Back button • Top button **Rear** • Pairing button • Power switch
Click response time	Normal (20 ms)
Scroll wheel	Hybrid: Clicky / Smooth automatic switching
Battery	Rechargeable lithium battery, 500mAh (USB-C charging)

Item	Description
Connectivity	• Wireless: 2.4G, Bluetooth • Wired: USB **Note:** The mouse is switched to wired operation when it is connected to PC via the USB cable.
Cable	Cable USB-C to USB-C (1.5 meters/4.9 feet)
Sensor	Suitable for glass surfaces
Polling rate	• Wired/2.4G: 125Hz / 500Hz / 1000Hz • Bluetooth: 125Hz
DPI range	400 to 6000 • Bluetooth: deault 1100 • Wireless Receiver: default 1600
Max connected devices	5
Mouse function settings	• Online software: Basic settings • Offline software: Advanced settings (for macOS & Windows)
Battery life	2 months when polling rate is 125 Hz **Note:** Actual battery life varies depending on polling rate and usage conditions.
Battery charging	Approximately 3 hours to reach a full charge

Status Lights

Refer to the following guide to understand your mouse's battery, charging, and connection signals.

Front status light

The front status light indicates the mouse's power, battery, and charging status.



Icon	Light	Status
	Solid red	Low battery (15% or less)
	Breathing blue	Charging
	Solid blue	Fully charged

Connection lights

The connection lights on the bottom of the mouse show your wireless connection status.



Bluetooth

The three connection lights next to the Bluetooth icon ᛒ indicate the status of your assigned Bluetooth channels (1, 2, and 3).

	Light	Status
	Fast blinking blue	Entered pairing mode
10s	Blinking blue for up to 10 seconds	Reconnecting or waking up
5s	Solid blue for 5 seconds	Connected
x5	Blinks blue 5 times	Not paired

Wireless Receiver

The connection light next to the receiver icon indicates your Wireless Receiver PS01R connection status.

Icon	Light	Status
	Solid blue for 5 seconds	Connected
	Blinks blue 6 times	Not paired

Note

When the mouse is connected directly via a USB-C wired connection, the connection lights remain off.

© 2026 BenQ Corporation.
All rights reserved.
Rights of modification reserved.