



Overview

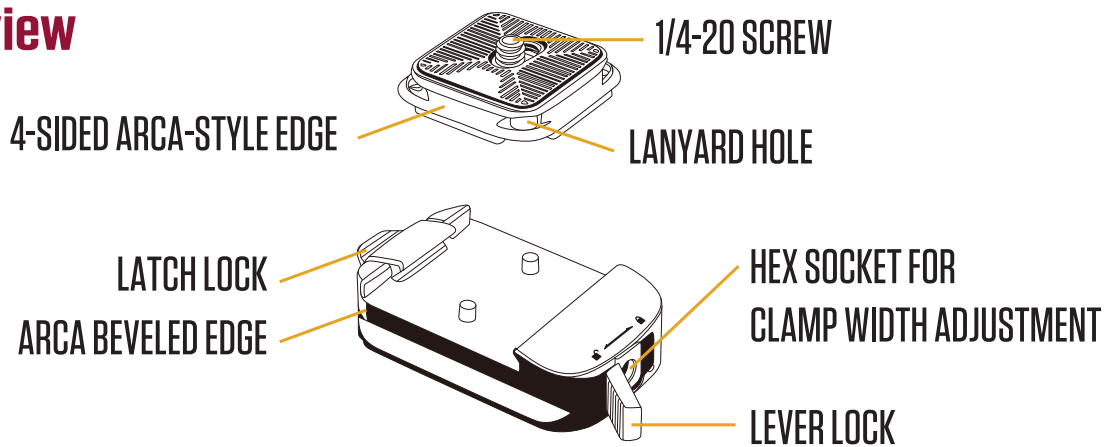


Instructions

1.




Attach the base to an arca-style head.

2.

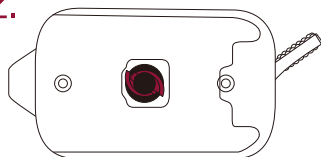


To attach the base to a 3/8-16 screw, remove the 1/4-20 reducer bushing.

3.

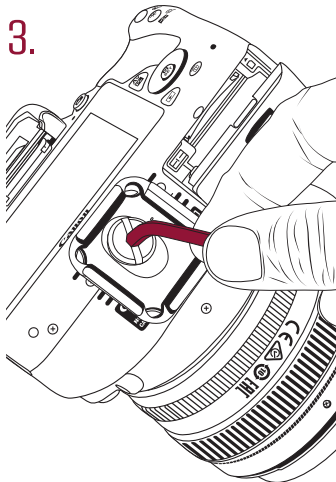


Use the hex key or the included tool to tighten the plate onto the camera base.

4.

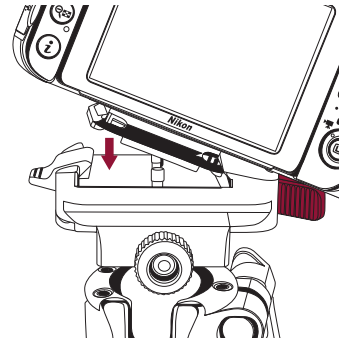

Slide the plate into the lever lock side, and press down until the latch locks into place. Close the lever lock.

5.

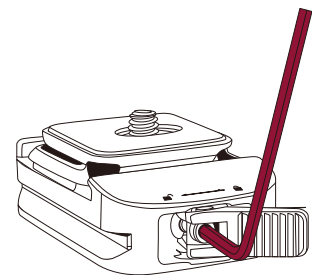

Use the hex key to adjust the locking width.