




Oben®

DMCA-11

Granite Series
Desk Mount Camera Arm

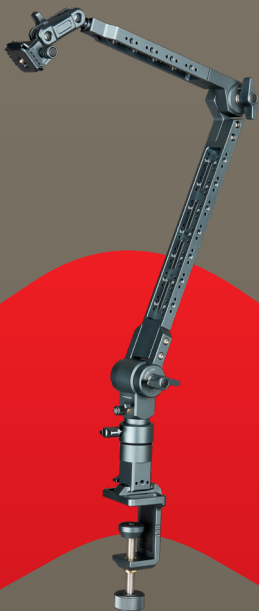

You're on steady ground®

Thank you for choosing Oben's Granite Series of camera and lighting accessories

The DMCA-11 Desk Mount Camera Arm is a versatile and rugged photo and camera accessory that will complement practically every studio or location camera setup. This arm is designed to carry many times its weight and is ideal for a wide range of uses, including shooting and lighting from overhead angles. Five articulating joints provide aiming and location options that can't be achieved with traditional desktop tripods, boom arms, or light stands.


The arm is constructed with lightweight aluminum but is rugged enough to support loads of up to 11 pounds. A thick C-clamp provides multiple mounting options including NATO rails and a baby pin. Each section of the base is removable, so you can mount the arm directly onto a light stand or C-stand. And when the arm isn't in use, the base sections can be used separately to mount lights and other accessories.

**Warnings:**

- *Please read and follow these instructions and keep this manual in a safe place.*
- *Clean the unit with only a soft, dry cloth.*
- *Make sure that this product is intact and that there are no missing parts.*
- *Do not exceed the maximum load capacity of 11 pounds.*
- *Remove the camera from the arm during setup and transport.*
- *Make sure all locks are securely engaged when the arm is in use.*
- *All images are for illustrative purposes only.*

Visit our website at **ObenSupports.com**
for more Oben products.

OVERVIEW

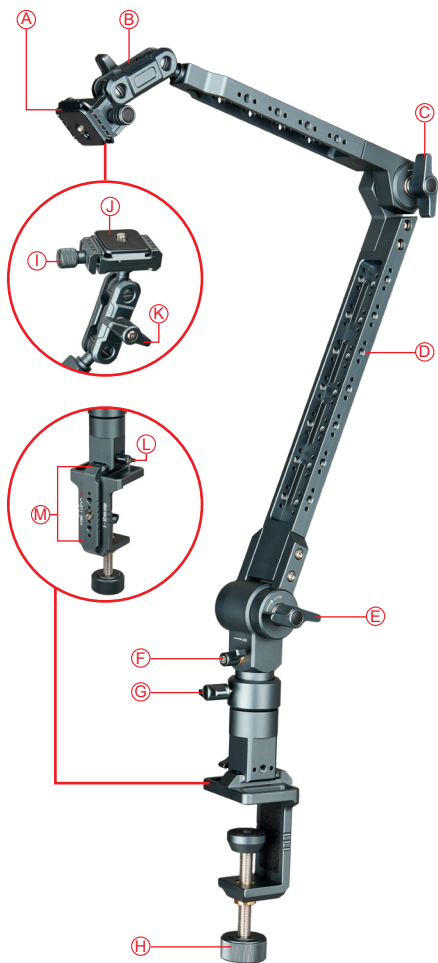

CAMERA ARM

- Ⓐ Arca-style clamp and quick-release plate
- Ⓑ Magic arm
- Ⓒ Top angle lock
- Ⓓ 1/4-20 accessory holes
- Ⓔ Bottom angle lock
- Ⓕ Pan lock
- Ⓖ 5/8 receiver locking knob
- Ⓗ C-clamp locking knob

MAGIC ARM

- Ⓘ Quick-release locking knob
- Ⓙ Quick-release plate
- Ⓚ Magic arm locking knob


BASE ASSEMBLY

- Ⓛ NATO lock
- Ⓜ Top and Side NATO rails

C-Clamp

Attach the C-clamp to almost any surface like a desktop, shelf, or door from 0.2 to 1.9 inches thick to position your camera in an ideal spot for your exposure.

The C-clamp can be used as a convenient stand-alone desktop mount to add accessories to the 1/4-20 and 3/8-16 sockets.

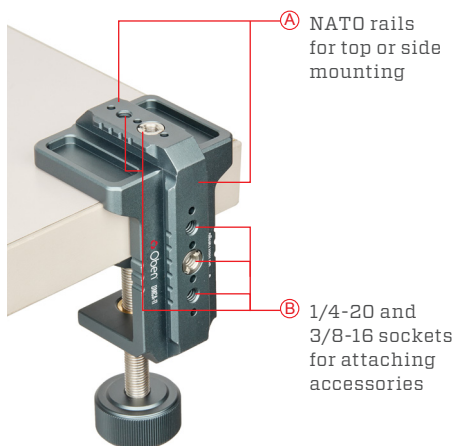


Mounting the Arm on the NATO rails



1. Loosen the NATO lock and slide the baby pin base onto the NATO rails. Tighten the lock until secure.

The removable baby pin base slides onto the NATO rails and provides a solid and nonslip mount for the arm.

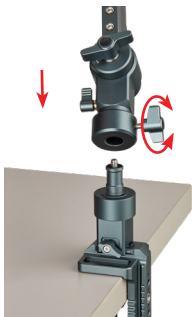

2. Loosen the baby pin locking knob and mount the arm onto the baby pin. Tighten the lock so the baby pin base is secure.

3. Place the arm onto the baby pin and tighten the baby pin locking knob until secure.

Baby Pin Mounting




Mount the arm onto a light stand, wall plate, or boom arm with a 5/8-inch baby pin. Loosen the baby receiver locking knob and remove the baby pin accessory from the base of the arm to expose the 5/8-inch receiver. Place the arm onto the baby pin and tighten the locking knob until secure.

Adjusting the Arm

Loosen the locking knob for each arm section, move the arm to the desired angle, and securely tighten the locking knob so the arm doesn't slip or move under the weight of the attached gear.

Important! Always use one hand to support attached cameras, lights, or accessories when loosening the top or bottom angle locks.

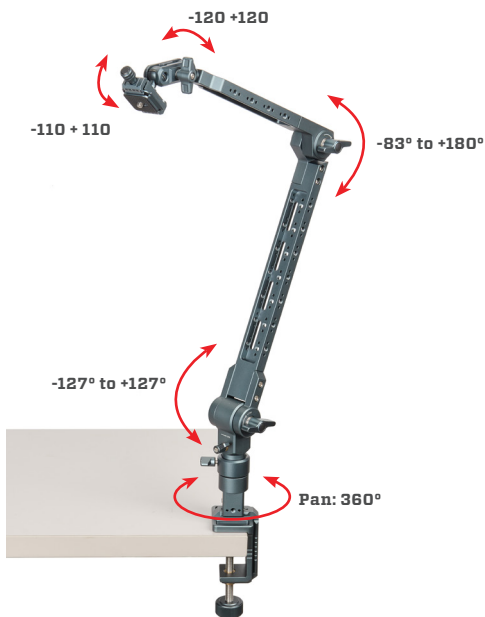

The Magic Arm

The DMCA-11 features a magic arm with an Arca-style clamp and a quick-release plate with a 1/4-20 mounting screw.

1. Loosen the quick-release locking knob and remove the plate from the clamp. Screw the plate into your camera's 1/4-20 mounting socket. (make sure the magic arm locking knob is securely tightened).

2. Place the edge of the plate into the clamp edge opposite the locking knob. Then lower the other edge into the clamp and securely tighten the locking knob.

Important! The Magic arm locking knob controls both ball joints. When adjusting the camera position or angle, make sure to support the camera with one hand while loosening the lock.

SPECIFICATIONS

Load Capacity	11 lb. (5 kg)
Top Mount	1/4-20 male
Base Mount	1.5 in. (3.8 cm) top NATO rail 3 in. (7.6 cm) side NATO rail 5/8 in. baby receiver 1/4-20 female (×3) 3/8-16 female (×2)
Maximum Working Height	31.5 in. (80 cm)
Folded Length	17.5 in. (44.5 cm) without clamp 24 in. (61 cm) with clamp
C-Clamp Opening	0.2 to 1.9 in. (0.5 to 4.8 cm)
Points of Articulation	5
Material	Aluminum
Width	3 in. (7.6 cm)
Depth	2.25 in. (5.7 cm)
Weight	3.4 lb. (1.54 kg)

Five-Year Limited Warranty

This Oben product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of five (5) years from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function. This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state. To obtain warranty coverage, contact the Oben Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Oben along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.obensupports.com or call Customer Service at 212-594-2353.



Product warranty provided by the Gradus Group.
www.gradusgroup.com



www.obensupports.com

Oben is a registered trademark of the Gradus Group.
© 2026 Gradus Group LLC. All Rights Reserved.