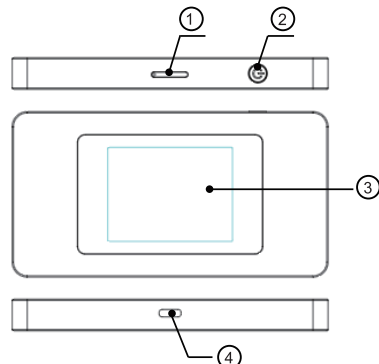
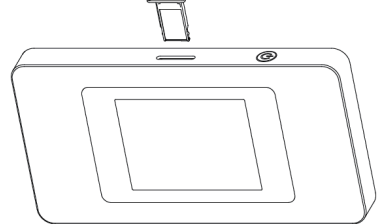
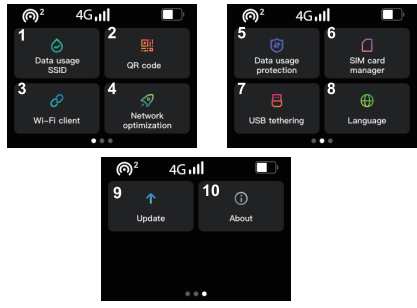
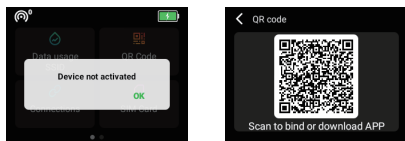


62mm	Quick start guide														
	 U3X User Manual		Product Overview  1. SIM Slot 2. Power Button 3. LCD Touch Display 4. Type-C(Input)		Function Introduction 1. Power on: Press power button for 3 seconds. 2. Power off: Press power button for 5 seconds. 3. Reset: Press power button for 18 seconds. Local SIM Guide  1. Local SIM is supported by U3X, only insert Nano-SIM card (small card). 2. Use a needle to pull out the SIM cards. Please contact customer service if any issue encountered.		User Interface  1. Data usage SSID: Show data package usage, Wi-Fi name and Wi-Fi password. 2. QR code: For downloading Apps bind user account with the device. 3. Wi-Fi client: Management of devices that access Wi-Fi. 4. Network optimization: Click to optimize network and choose a better network. 5. Data usage protection: Turning on data usage protection function to prevent the data consumption from automatic App updates or automatic sync. 6. SIM card manager: After user inserts one physical SIM card, user can select cloud SIM or physical SIM card to use data services, including the APN configuration of inserted physical card. 7. USB tethering: Via USB port to share data flow from device to other connected terminals. 8. Language: Set display language. 9. Update: It will automatically upgrade to the latest version after clicking the button. To save flow you can connect your device to one available Wi-Fi network by turning on the Wi-Fi switch and through Wi-Fi networks to download software upgrade package. 10. About: Displays the software version, IMEI number, and factory settings of the device.		Quick Start Guide  1. Power on: Press and hold the power button for 3 seconds until the device turns on. To bind the device, tap QR code button, and scan the QR code page. 2. Sign up: To download the GlocalMe APP and sign up, use your phone to scan the QR code or search for "GlocalMe" in the APP Store. Notes: If you can't download iOS version after scanning, tap ... icon at the top right corner of the screen, and choose to open Safari to complete the download. 3. Bind device: Login to your GlocalMe account on the phone, go to My device > Bind device, and then scan the QR code on the screen. 4. Connect to Wi-Fi Networks: Reboot the device, and then turn on Wi-Fi and you will see a list of wireless networks. Find and select the Wi-Fi network name (GlocalMe_XXXXX). When prompted, enter the Wi-Fi password displayed on the screen. Note: 1. Reboot your device after it is bound successfully. 2. Recharge your account on GlocalMe App as soon as possible before the initial data package runs out. There are various payment methods available, such as Alipay, PayPal, etc. For more information on topping up, visit the top-up page.		Technical Specification Model: GLMU20A02 Box content: Device*1pcs, User manual*1pcs, Quick start guide*1pcs, Type-C cable*1pcs, SIM card pin*1pcs ● Size: 126 x 66 x 12.6mm ● Screen size: 2.4 inch ● LTE FDD: B1/2/3/4/5/7/8/9/12/13/17/18/19/20/25/26/28/66 ● LTE TDD: B34/38/39/40/41 ● WCDMA: B1/2/4/5/6/8/9/19 ● GSM: 850/900/1800/1900 ● Max upload speed: 50Mbps ● Max download speed: 150Mbps ● Wi-Fi: 2.4G; 802.11 b/g/n ● SIM Slot: 1 x Nano SIM ● USB port: Type-C (input) ● Battery capacity: 3500mAh(typical) ● Power input: 5V = 2A Note: Listed wireless data transfer rates are the theoretical maximum. The actual data transfer rate may vary depending on the network environment and carrier's coverage.		Warning Specific Absorption Rate (SAR) refers to the rate at which the body absorbs RF energy. The SAR limit is 1.6 watts per kilogram in countries that set the limit averaged over 1 gram of tissue and 2.0 watts per kilogram in countries that set the limit averaged over 10 grams of tissue. During testing, the device are set to their highest transmission levels in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value. EU Regulatory conformance The device complies with RF specifications and when used with an accessory that contains no metal and that positions the device a minimum of 0.5 cm from the body. The SAR limit adopted is 2.0W/kg averaged over 10 grams of tissue. The highest SAR value reported for the device when properly worn on the body complies with the limit. FCC Regulatory conformance For body worn operation, the device complies with FCC RF exposure guidelines and when used with an accessory that contains no metal and that positions the device a minimum of 1.0 cm from the body. The SAR limit adopted by the FCC is 1.6W/kg averaged over 1 gram of tissue. The highest SAR value reported for the device when properly worn on the body complies with the limit. This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause. Undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Note: This equipment has been tested and complies with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.  This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur during installation. If the device does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is suggested to try to correct the interference by the following measures: --Reorient or relocate the receiving antenna. --Increase the distance between the equipment and receiver --Connect the equipment to an outlet on different circuit to the receiver --Consult the manufacturer or an experienced radio/TV technician for help.  For the disposal and recycling of the devices. This symbol (with or without a solid bar) on the device, batteries (if included), and/or the packaging, indicates that the device and its electrical accessories (for example, a headset, adapter, or cable) and batteries should not be disposed of as household garbage. These items should not be disposed of as unsorted municipal waste and should be taken to a certified collection point for recycling or proper disposal. For detailed information about device or battery recycling, contact your local city office, household waste disposal service, or retail store. Disposal of the device and batteries (if included) is subject to WEEE, Directive recast (Directive 2012/19/EU) and battery directive (Directive 2006/66/EC). The purpose of separating WEEE and batteries from other waste is to minimize the potential environmental impacts and human health risk of any hazardous substances that may be present.		 facebook.com/GlocalMe  GlocalMe WeChat platform Hong Kong uCloudlink Network Technology Limited E-mail: service@ucloudlink.com Hotline: +852 8191 2660 / +86 400 699 1314 (China) Facebook: GlocalMe Instagram: @GlocalMeMoments Twitter: @GlocalMeMoments YouTube: GlocalMe Address: SUITE 603, 6/F, LAWS COMMERCIAL PLAZA, 788 CHEUNG SHA WAN ROAD, KOWLOON, HONG KONG  uCloudlink This product and related system are protected by one or more of uCloudlink's patents, details please refer to https://www.ucloudlink.com/patents Ver 1.0 Copyright © 2021 uCloudlink All Rights Reserved