规格参数

型号	CR2
可容纳卡数	11张（包含SD*5、TF*4、SIM*2）
SD4.0/TF4.0传输速率	理论最高312MB/s
内存卡兼容	最高支持UHS-II SD/TF4.0卡读写，可向下兼容
双卡双读	支持
读写卡槽	SD4.0/TF4.0
输出接口	USB 3.1 Type-C
重量	134g（人工测量有轻微误差）
外壳材料	硅胶保护套 / 铝合金外壳
产品尺寸	113.5*62.3*25.3MM（手工测量有轻微误差）
工作环境温度	0°C~40°C

*以上参数为Ulanzi实验室测试数据，仅供参考，如有疑问可联系售后技术解答。

zh

Preface

Thank you for choosing Ulanzi products.

Important Notes

Please read this manual carefully.
Retain this manual for future reference. If transferring the product to another user, ensure this manual is included.
Observe all warnings and follow all instructions provided in this manual.

Warning

*Do not place or use the product near corrosive chemicals, as exposure may lead to corrosion and potential product failure.
*Please read this manual carefully. Our company is not liable for product damage or data loss resulting from improper operation.
*This manual is based on rigorous company testing. Design and specifications are subject to change without prior notice.

Caution

- Do not attempt to disassemble this product.
- With an IP54 rating, the product is protected against water splashes. However, do not submerge it in water for extended periods, as this may result in data loss.
- Do not remove the memory card during read or write operations, to avoid corruption or loss of data.
- Always insert the memory card in the correct orientation. If insertion fails, reverse the direction and try again. Do not use excessive force.
- Do not power the product with voltage or current exceeding the specified ratings, to prevent malfunction or damage.
- Mild heating of the device and memory card during data transfer is normal. The aluminum alloy housing provides efficient heat dissipation for safe operation.
- Actual data transfer speeds may vary from laboratory values due to factors such as computer performance and memory card specifications.

en

Proper Use of the Device

- Read this manual carefully, paying special attention to the "Important Notes" section.
- Use and store the product only within the operating and environmental conditions specified in this manual.
- Any use of the product not in accordance with this manual, or under conditions other than those specified for operation or storage, will be considered misuse.

Package List


Silicone Protective Cover x1


SD Card Case x1


Carabiner x1


C-to-A Adapter x1


Card Ejector Pin x1


User Manual x1

en

Product Overview

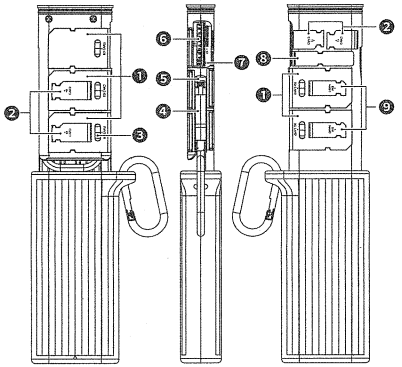

1. SD Card Slot
2. TF Card Slot
3. Non-Slip Silicone Pad
4. Type-C Cable
5. Cable Access Cutout
6. SD/TF Slots (Simultaneous Read/Write Supported)
7. Status Indicator
8. Card Ejector Pin Slot
9. SIM Card Slot

en

Operating Instructions

1.Press "PUSH" to open the card case.

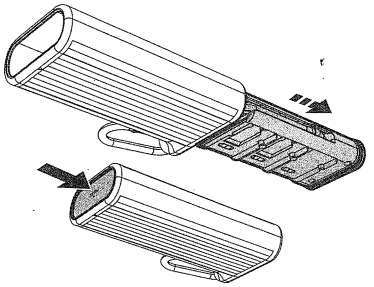

2.Push the latch to release the data cable.



ua

3.Connect the cable and insert SD/TF cards into the correct slots.
(Supports reading both cards at the same time)



4.Store up to 11 extra cards inside (5 SD, 4 TF, 2 SIM).



ua

5.Use the card ejector pin to replace phone SIM cards.



ua

Specifications

Model	CR2
Card Capacity	11 cards (5*SD, 4*TF, 2*SIM)
SD 4.0/TF 4.0 Transfer Speed	Up to 312 MB/s (theoretical max)
Card Compatibility	UHS-II SD/TF 4.0; backward compatible
Dual-Slot Simultaneous Read/Write	Supported
Reader/Writer Slots	SD4.0/TF4.0
Output Interface	USB 3.1 Type-C
Weight	134g (slight variance may occur in manual measurement)
Housing Material	Silicone Protective Cover / Aluminum Alloy Housing
Product Dimensions	113.5*62.3*25.3mm (slight variance may occur in manual measurement)
Operating Temperature	0°C~40°C

*The above data is based on Ulanzi lab testing results and is for reference only.
For further technical support, please contact our customer service.

en