




AXLER™

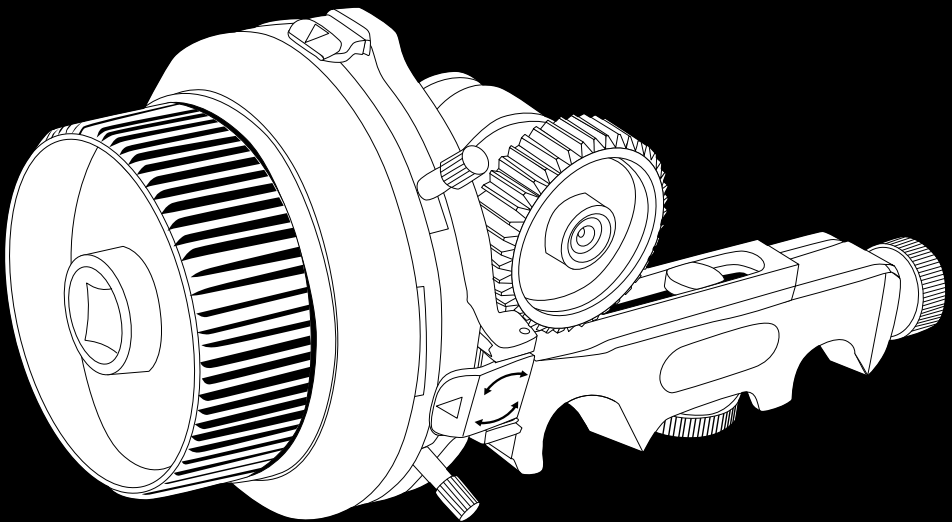

FF-2S-QR

HAMMERHEAD
Follow Focus


QUICK-START GUIDE

THANK YOU FOR CHOOSING AXLER.

PRECAUTIONS

- Please read and follow these instructions, and keep this manual in a safe place.
- Make sure that this product is intact and that there are no missing parts.
- Use only parts provided by the manufacturer.
- Handle the unit with care.
- To avoid damage to this product, be careful not to overtighten or improperly thread any of the threaded fittings.
- Clean the unit with a soft, dry cloth.
- Make sure everything is secure before use.
- All images are for illustrative purposes only.

SPECIFICATIONS	
Drive gear	43 tooth/0.8 film pitch
Lens gear wrap	152 tooth/0.8 pitch
Rail width	0.5 in. (15 mm)
Lens diameter	Max: 100 mm Min: 20 mm
Dimensions	Height: 3.5 in. (8.9 cm) Max. width: 8 in. (20 cm) Min. width: 6.5 in. (16.5 cm) Depth: 3 in. (7.6 cm)
Weight	9.2 oz. (260 g)

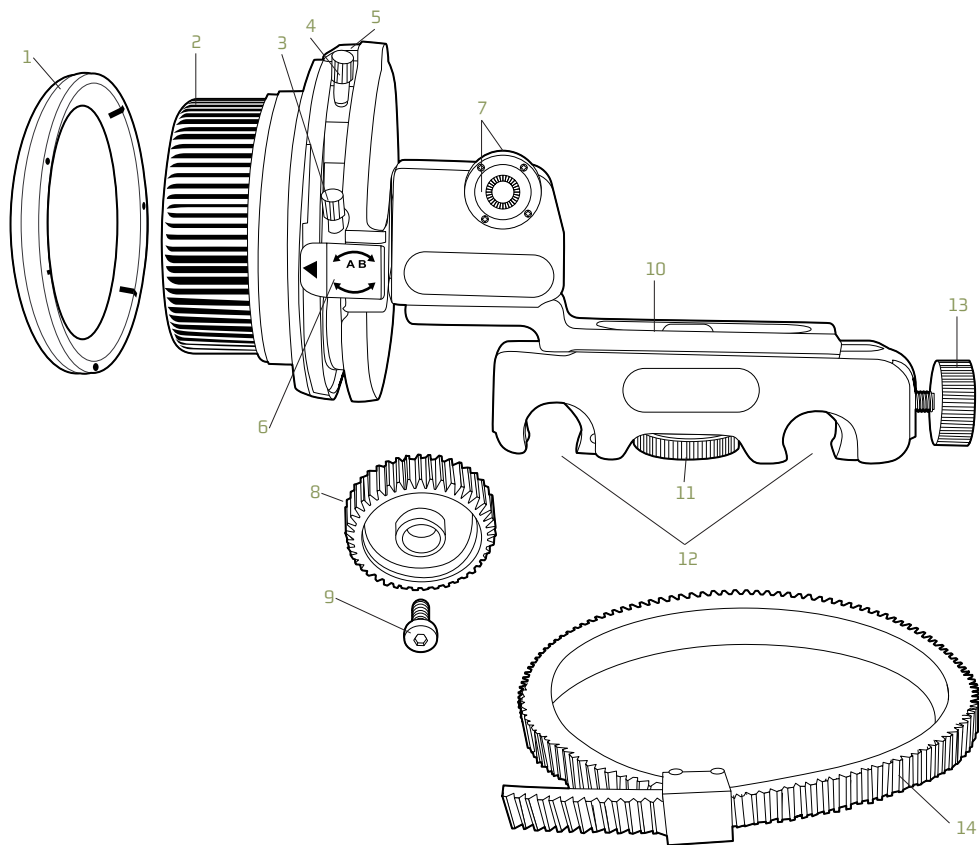

OVERVIEW

- 1. Marking disc:** Pull to remove.
- 2. Focus wheel**
- 3. Stop A:** Loosen the screw to adjust.
- 4. Stop B:** Loosen the screw to adjust.
- 5. Reference marker**
- 6. Stop A/B release:**
Lift to release A and B stops.
- 7. Dual-sided drive**
- 8. Drive gear**
- 9. Drive gear screw:** Use a 3 mm hex wrench to switch the drive gear to the other side of the dual-sided drive.
- 10. Width adjustment:**
Accommodates lens diameters from 0.78 to 3.9 inches (20 to 100 mm).
- 11. Width adjustment locking knob**
- 12. Rail mount:** Fits most 15 mm rail systems.
- 13. Rail mount locking knob**
- 14. Adjustable lens gear:** Wraps around your lens's focus ring. Make sure it's tight to ensure a solid grip.



ONE-YEAR LIMITED WARRANTY

This Axler product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of one (1) year from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function.

This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance, EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Axler Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Axler along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.axlersupports.com or call Customer Service at 212-594-2353.

Axler is a registered trademark of the Gradus Group.

© 2016 Gradus Group LLC. All Rights Reserved.

www.AxlerSupports.com

GG1

