
Quick Start Guide

S7P

Saga 7" Super High Bright 3G-SDI/HDMI Touchscreen Monitor with 3D LUTs and Scopes

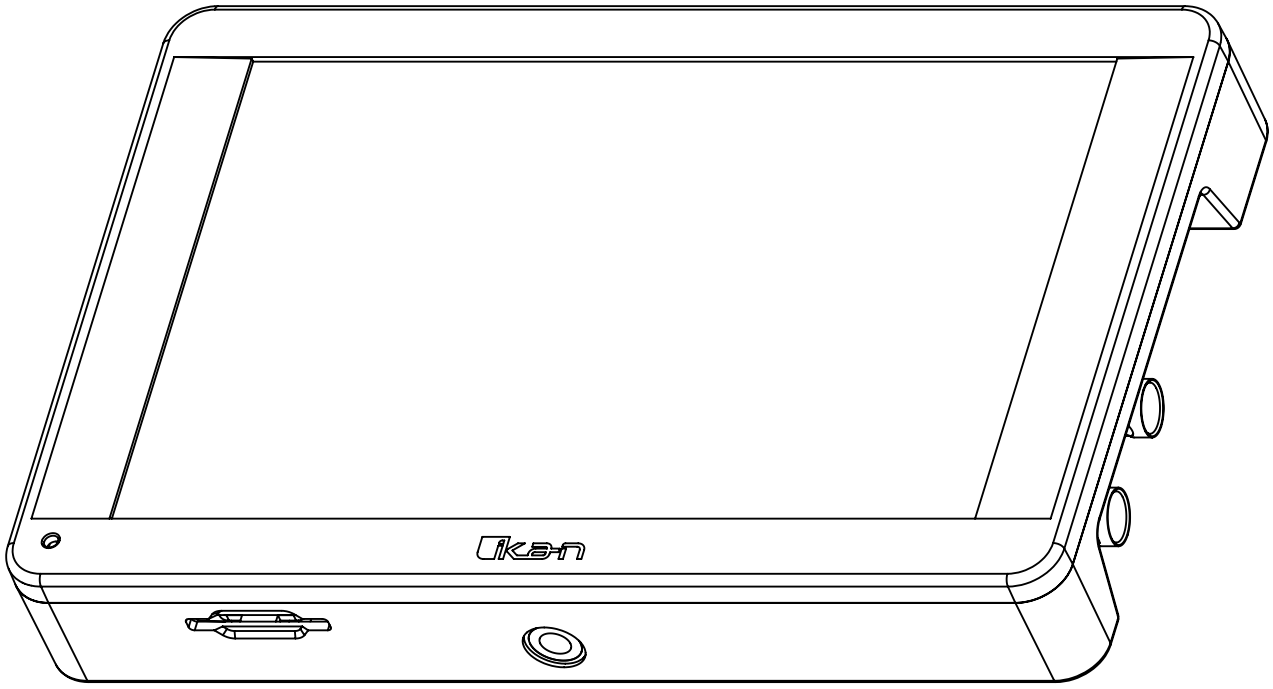



What's Included

- ☐ 1 x S7P Monitor
- ☐ 1 x Power Adapter
- ☐ 1 x Shoe Mount

Getting Started


1. **Menu Button - Scroll Wheel**
   Used to enter and navigate the menu
2. **Exit / Back**
   Used to exit or go back
3. **Mute**
   Toggle sound on and off
4. **Source**
   Switch between SDI and HDMI inputs
5. **1/4”-20 Threaded Mounting Points**
6. **Power Button**
   Hold 3 seconds to turn on/off
7. **DC 7-24V Power Terminal**
8. **SDI Input Terminal**
9. **SDI Output Terminal**
10. **SD Card Slot**
    Used to load LUTs
11. **3.5mm Headphone Output**
12. **HDMI Input Terminal**
13. **HDMI Output Terminal**
14. **L Series Battery Slots**
    Option to use 1 or 2 DV batteries

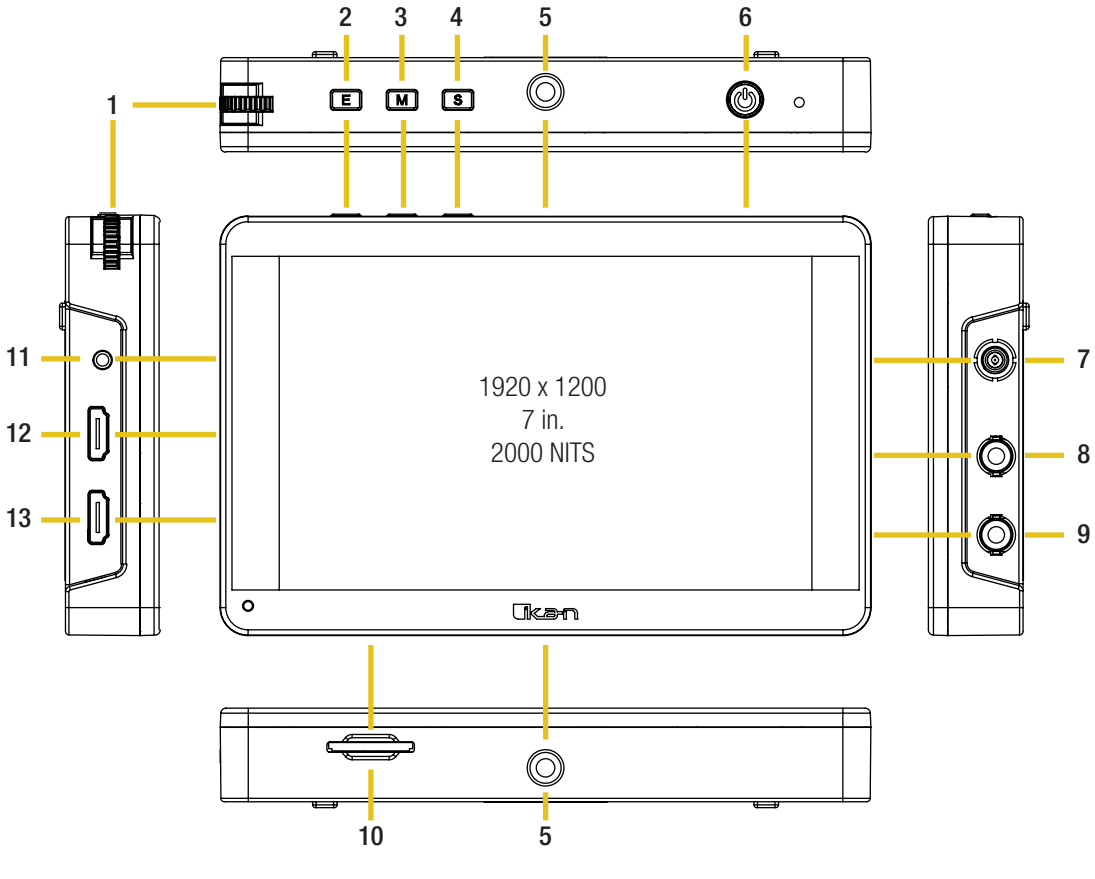

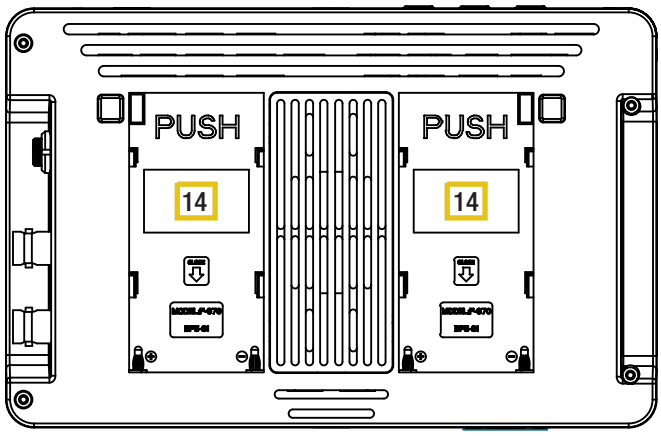

Configuration of Menu Settings

Assist Menu Dropdown

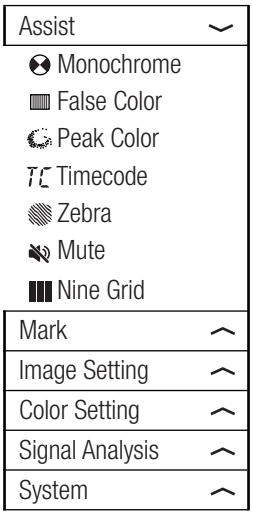

Monochrome — *Toggle between off, gray, red, green, and blue*

off | gray | red | green | blue

False Color — *Two types of visual exposure image overlay*

off | type 1 | type 2

Peak Color — *Activate peaking in select color*

off | red | green | blue

Timecode — *Toggle timecode on/off*



Zebra — *Use 75IRE or 100IRE to check exposure*

off | 75IRE | 100IRE

Mute — *Toggle sound on/off*



Nine Grid — *Zoom in on one of the 9 sections*

Configuration of Menu Settings

Mark Menu Dropdown

- Assist
- Mark
  - Center Mark
  - Safety Marker
  - Guide
  - Guide Back
  - Marker Color
  - Grid Line
- Image Setting
- Color Setting
- Signal Analysis
- System

Center Mark — *Toggle center crosshair on/off*



Safety Marker — *Select action area and title safe areas displayed*

off	70%	80%	90%
16:9	16:10	4:3	5:4
1.85:1	2.35:1		

Guide — *Apply aspect ratio frame guides*

off	16:9	16:10	4:3
1.85:1	2.35:1		

Guide Back — *Option black out or half tone the areas outside of frame guides*

off	black	half tone

Marker Color — *Pick marker line color*


gray	yellow	red	green
blue	white	black	

Grid — *Apply grid lines to assist with composure*

off	small	middle	large

Configuration of Menu Settings

Image Setting Menu Dropdown

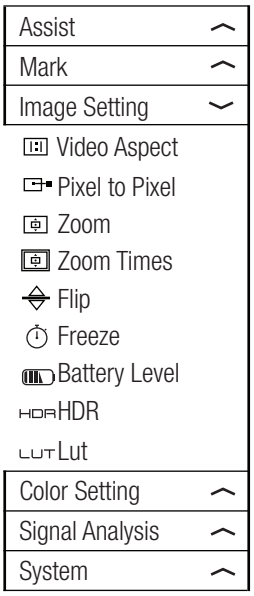

Video Aspect — *Adjust video aspect ratio*

off	70%	80%	90%
16:9	16:10	4:3	5:4

Pixel to Pixel — *Toggle on/off*

Zoom — *Select amount to punch in and check focus*

off	1.4X	2X	3X
4X	5X	6X	7X
8X	9X	10X	user

Zoom Times — *Adjust zoom by percentage*

100

Flip — *Flip image*

off	on	auto

Freeze — *Freeze frame*

Battery Level — *Toggle Battery Level icon on/off*

HDR — *Preview HLG 2020, HLG 709, or HLG P3*

off	HLG 2020	HLG 709	HLG P3

LUT — *Toggle 3D LUTs on/off; import 3D LUTs from SD Card*

Import


SLOG2

SLOG3

LOGC

Configuration of Menu Settings

Color Setting Menu Dropdown

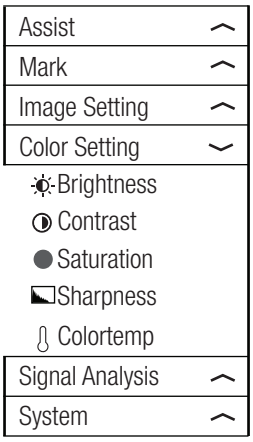

Brightness



Contrast



Saturation




Sharpness



Colortemp

- USER
- 6500K
- 9300K

Signl Analysis Menu Dropdown

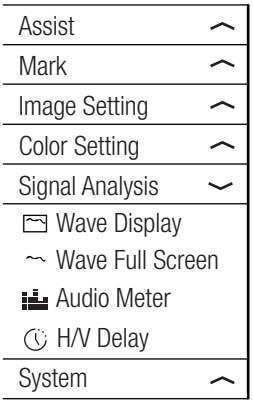

Wave Display — *Select scopes to display*

off	Y Parade	YUV Parade	RGB Parade
Y Histogram	RGB Histogram	Vector	Wave All

Wave Full Screen — *Toggle full screen waveform*



Audio Meter — *Toggle on/off*



H/V Delay — *Toggle H/V Delay*

off	H Delay	V Delay	H/V Delay

Specifications

Aspect Ratio	16:10
Battery	L Series Battery
Brightness	2000 nits
Contrast Ratio	1100:1
Inputs	1 x HDMI 1 x 3G-SDI 1 x 3.5mm Audio
Outputs	1 x HDMI 1 x 3G-SDI
Resolution	1920 x 1200
UPC Code	847983030736
Viewing Angle	178° (89°/89°)

Supported Video Signals Specifications

HDMI	720x480i & 720x480p @ 59.94, 60 Hz 720x576i & 720x576p @ 50 Hz 1280x720p @ 50, 59.94, 60 Hz 1920x1080i @ 50, 59.94, 60 Hz 1920x1080psf @ 24, 25, 29.97, 30 Hz 1920x1080p @ 23.97, 24, 25, 29.94, 30, 50, 59.94, 60 Hz 3840x2160p @ 24, 25, 30 Hz 4096x2160p @ 24 Hz
3G-SDI	720x480i @ 59.94, 60 Hz 720x576i & 720*576p @ 50 Hz 1280x720p @ 50, 60 Hz 1920x1080i @ 50, 59.94, 60 Hz 1920x1080psf @ 24, 25, 29.97, 30 Hz 1920x1080p @ 23.93, 24, 25, 29.97, 30, 50, 59.94, 60 Hz

Optional Accessories

Some other products that work well with this item available from Ikan include:

MA207 7 in. Articulating Arm
MA211 11 in. Articulating Arm
MA211-R 11 in. Articulating Arm w/ Single Rod Mount
IBS-750 IBS Sony L-Series NP-F750 Compatible Battery
IBS-970 IBS Sony L-Series NP-F970 Compatible Battery

Learn More

More dynamic information at official website: www.ikancorp.com

Support

Contact email: support@ikancorp.com

CONDITIONS OF WARRANTY SERVICE

- Free service for one year from the day of purchase if the problem is caused by manufacturing errors.
- The components and maintenance service fee will be charged if the warranty period is expired.

Free Service will not be provided in the following situations: (*Even if the product is still within the warranty period.)

- Damage caused by abuse or misuse, dismantling, or changes to the product not made by the company.
- Damage caused by natural disaster, abnormal voltage, and environmental factors, etc.

©2019 Ikan International. All rights reserved.