

PAD-CGS

CTA DIGITAL


Compact Gooseneck Floor Stand for 7-13 Inch Tablets

INSTRUCTION MANUAL


Thank you for choosing CTA Digital's product. We hope that you will enjoy using it. Please follow the guidelines and instructions as laid out in this instruction manual.



Package contents:

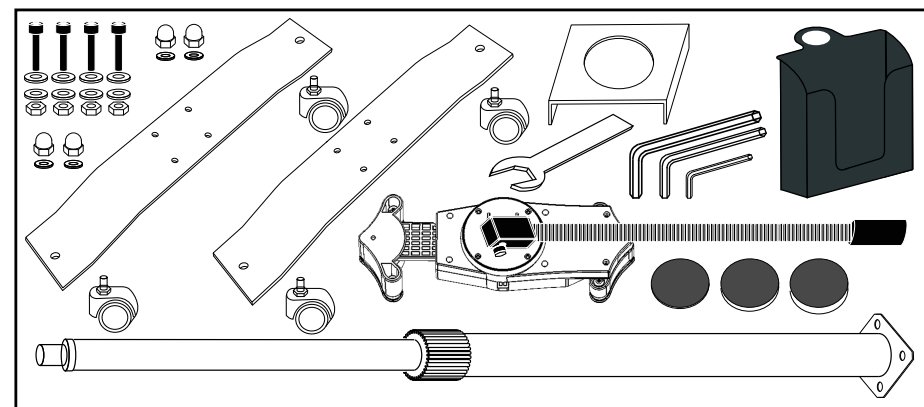

Attaching Foam Pad to Tablet Holder

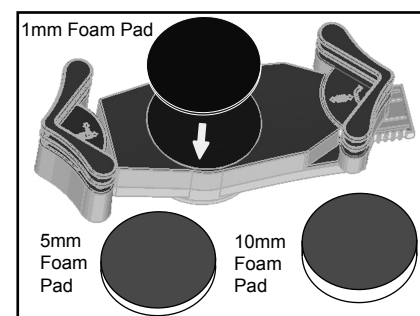

Use this table to determine the appropriate foam pad to use with your tablet.
Note: sizes refer to total tablet size with or without a case.

Foam Pad Thickness	Tablet Thickness:
1mm	0.67-1.06in / 17-27mm
5mm	0.51-0.91in / 13-23mm
10mm	0.31-0.71in / 8-18mm


Select the appropriate foam pad according to the thickness of your tablet (or tablet in its case), then press adhesive side into center of the tablet holder.

Instructions:


1. Installing the Wheels



Place a spring washer over the screw bolt on the wheel.

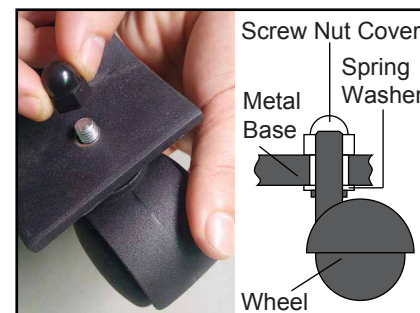

Place the screw bolt from each wheel through the metal base, then place a nut cover over the top of each. Screw down clockwise by hand, then use wrench to tighten further.

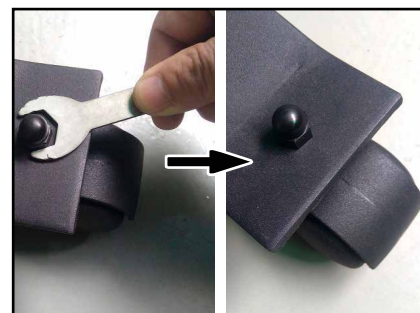

2. Base Assembly and Connecting the Metal Cover:

METAL CONNECTION

HEIGHT
ADJUSTMENT
KNOB

POLE


Pole Assembly and Pole Nut
Cross Base Sections (2)

Medium
Allen Key

CONNECTION SCREW BOLT,
WASHERS AND NUT

METAL
CROSS BASE X 2

- 1) Place the metal base pieces with the higher piece on top of the cross base. Align the holes at the bottom of the pole with the holes on the cross base.
- 2) Insert a screw bolt with a washer into each of 4 holes. Place another washer on the underside of each screw bolts.
- 3) Grip the nut on the underside with one hand, and use the other to tighten each screw with Medium Allen key. Repeat to tighten all four screw bolts.

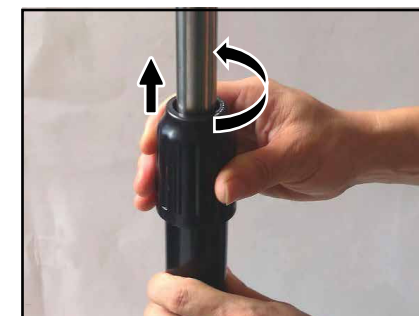

4. Rotate the grip counter clockwise to loosen completely and remove from top of pole.




5. Place the square metal cover over the top of the pole and slide down to stand base.



6. Place grip back over stand pole and tighten.

3. Connecting the Battery Case and Tablet Holder and Installing Your Device

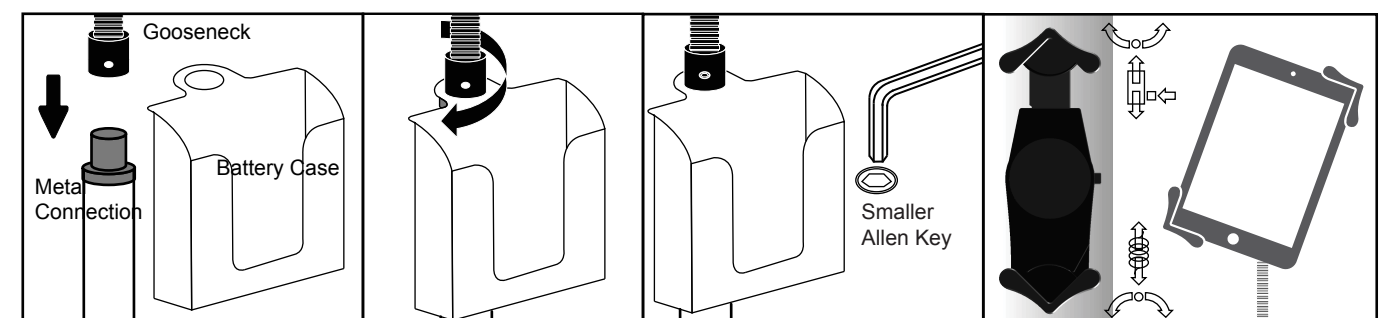


1. Place battery case over top of metal connection.
2. Screw gooseneck down onto metal connection by turning clockwise.
3. Use smaller Allen key to tighten the small meter screw inside gooseneck.

Note: if meter screws are already in, unscrew before attaching gooseneck.

4. Press button on side of tablet holder to slide open. Insert your tablet against spring arm, then slide other end back down.

3. Adjustment:

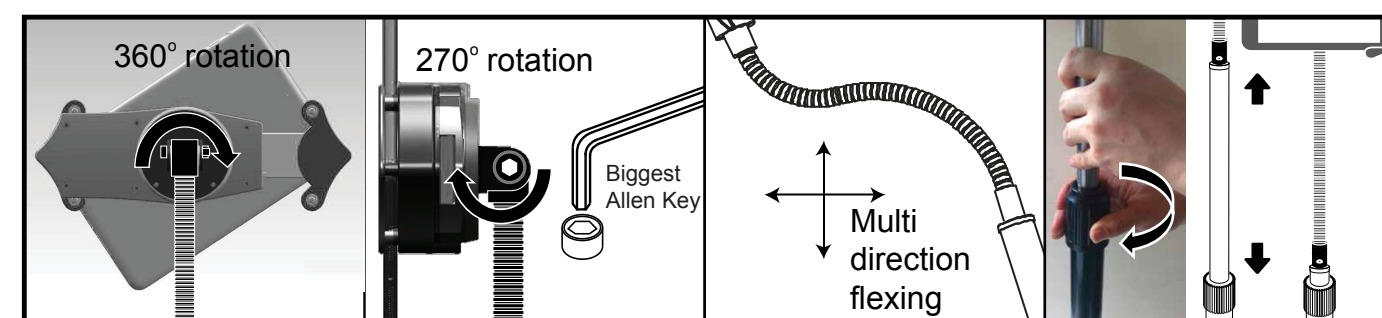

Use the biggest Allen key to tighten and loosen the gooseneck connection screw, adjusting ease of rotation in the tablet holder.

Gooseneck flexes by hand. To adjust the height of the pole, turn plastic cover counter-clockwise and raise or lower the pole to desired height. Turn clockwise again to lock it in place.