

PR◀AIM Alphabet 21ft Jib Crane (P-A21-J)

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.

Jib Sections




Supporting Accessories



All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

Cables

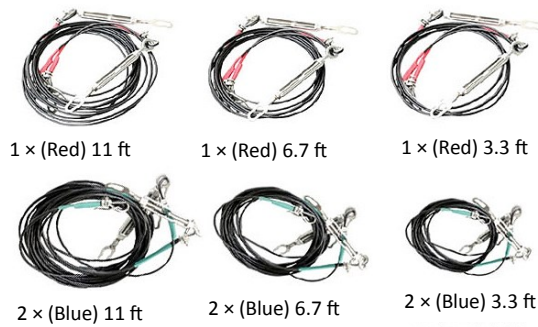

Storage Bag



Safety Hints of Jib Crane

ATTENTION: PLEASE READ THIS BEFORE USING TO PREVENT DAMAGE TO EQUIPMENT & OPERATOR

- The crane may not be assembled or operated under influence of alcohol, drugs or any other intoxicating substances. Lack of attention while connecting the components together can cause substantial damage to equipment / operator.
- The crane may only be operated on levelled horizontal position. Make sure that the surface is stable.
- To prevent any harm or injury, properly join all sections of the crane. It is suggested to use the support stand while telescoping the complete length.
- Always connect the steel cables properly to provide stability to the system. They should not negatively impact the movements of crane in any way.
- The complete panning & lifting range around it must be kept free. Avoid anybody standing under the crane. No loose objects may be stored or placed on it. Be very careful while using indoors.
- Never operate the crane in the immediate vicinity of high-voltage power cables. It holds danger to life.
- Particular care is required when operating the crane in unfavourable weather conditions. The crane must be shut down in sufficient time. When it is used in a rainy day, the pan-tilt head / gimbal head and controlling bar shall be protected against rain.
- When you want to transport the crane, lock the Pan & Tilt Axis for safety. Make sure that the components do not rub together and cause any material wear.
- Before the counterweights are removed, ensure the remote head is resting on the support stand. Then gradually remove the counterweights before remote head, camera or other parts.
- In the interest of safe crane operation, avoid abruptly swivelling or stopping the crane, otherwise it may cause serious damage to equipment.

FOLLOWING THESE GUIDELINES WILL PROVIDE BETTER SHOTS AND TROUBLE FREE OPERATION.

SHOULD YOU NEED ADDITIONAL INFORMATION, TECHNICAL ASSISTANCE IS AVAILABLE 'ONLINE' BY CONTACTING THE SALES REPRESENTATIVE.

■ SETUP INSTRUCTIONS


- Install the Hub (Section 2 of Jib) into bowl of your 100mm tripod stand and tighten the hub with center locking knob.



■ Jib Sections Setup

Connecting Section 2 with 3:

- Loosen the provided knob at the end of section 2 to slide the bars of section 3 into the end of section 2. Then tighten both the sections together using the provided knobs.

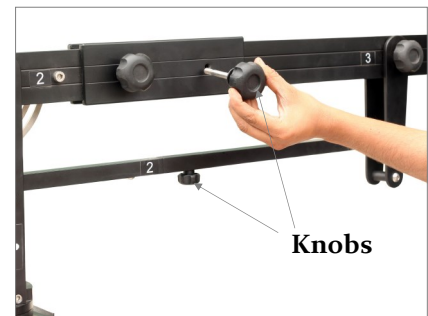

■ Cable Guide & Support Rod Setup

For Attaching Section 2a with 2, 2b with 2a, 2c with 2b & 1 with 2c:

- Attach cable guide to cable guide clamp on 2nd section properly. Loosen the knob, ahead of cable guide clamp in order to attach cable guide support rod to it. Retighten the knob to secure properly.



Cables Setup

- Now attach one end of 14.5ft blue cable to blue hook on back side of jib (section 3) and the other end of blue cable to blue hook on front section of jib (section 1). Similarly attach the second blue cable and align both the blue cables to the side of support rod.




- Now attach one end of 14.3ft red cable to red hook on back side of jib (section 3) and align the red cable to the cable guide from top. Then, attach the other end of red cable to red hook on front section of jib (section 1).



Adjustment Wire Tensioner

- The wires have the screw-in wire adjustment system in order to adjust the wire tension to level the jib.
- The jib arm can be locked (tilting) with the help of this knob. Then Insert the weight rod & weights (**not supplied**) to both ends and secure with the help of closers.

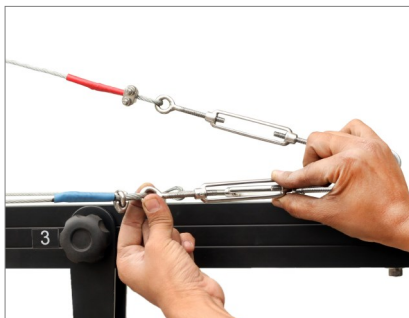

- The central fork has free hole to attach LCD mount bracket (**not included**).



- The camera plate can be tilted upwards & downwards with the help of provided handle.



YOUR PROAIM ALPHABET 21FT JIB CRANE ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.