


QR-SP400A Installation Instructions

NOTE: NP or BP battery compartment must first be removed.

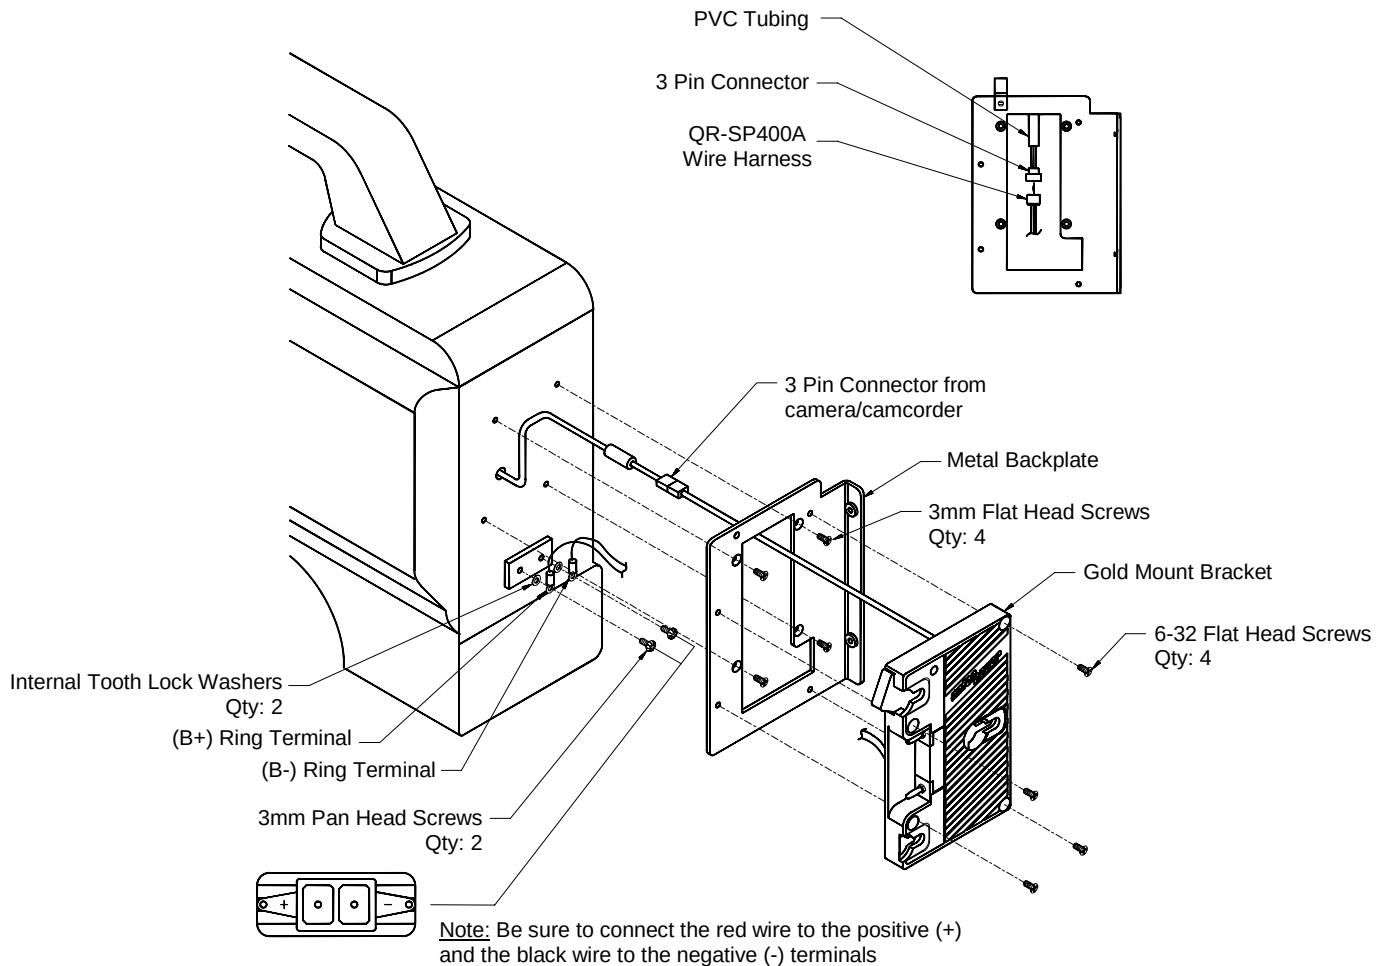

1. Remove the four (4) 6-32 flat head screws and free the Gold Mount Bracket from the Sheet Metal Backplate.
2. Attach the Sheetmetal Backplate to the camera/camcorder with the four (4) 3mm flat head screws (silver) supplied.
3. Connect the 3 pin connector from the Gold Mount to the 3 pin connector of the camera/camcorder.
4. With the supplied 3mm pan head screws and lockwashers, connect the red (+) wire ring terminal from the Gold Mount Bracket, to the B+ terminal on the camera/camcorder (see diagram). Be sure to note polarity. The B+ terminal is located on the left.
5. With the supplied 3mm pan head screws and lockwashers, connect the black (-) wire ring terminal from the Gold Mount Bracket, to the B- terminal on the camera/camcorder (see diagram). Be sure to note polarity. The B- terminal is located on the right.
6. Install the Gold Mount Bracket to the Sheet Metal Backplate using the 6-32 screws removed in step one. For proper dress, be sure the ring terminal connectors are facing upwards (see diagram) and that no wires are being pinched during installation.


QR-SP400A

Installation Instructions

(continued)



The QR-SP400A Gold Mount contains a few new unique features. The “Automatique” Light Control feature will automatically turn your on-camera light ON and OFF in sync with the VTR START/STOP button. To use this feature, be sure the “Automatique” switch is switched to the “ON” position. To maintain manual control of the light, be sure the “Automatique” switch is set to the “OFF” position.

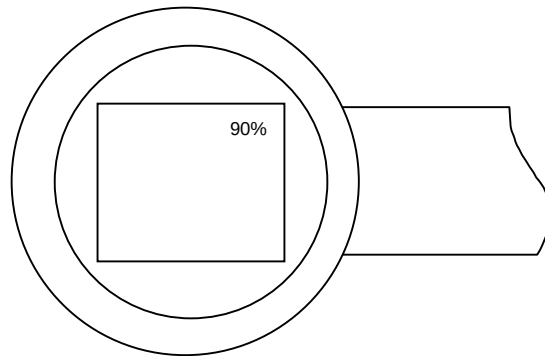

When using DIGITAL batteries, in conjunction with certain cameras/camcorders, the remaining battery capacity is displayed in the viewfinder.