



ConteraIP[®] Omni LX Remote Setup Installation Manual

20MP

AV20576RS

AVCOSTAR

Table of Contents

About Our Warranty	2
Global (3 Year) Limited Warranty	2
Camera Overview	3
Package Contents.....	4
Installation	5
Accessories.....	5
Surface Mount	6
Pendant Mount	14
Wall Mount.....	17
Pole Mount.....	20
Corner Mount.....	22
Camera Power Up.....	24
Alarm I/O Functions.....	26
Reset to Factory Default.....	27
Audio/SD Card Info	28
Camera Discovery, Setup, and Configuration	29
Camera Discovery	30
Camera Preset Configurations.....	31
Home Position / 360 Degrees Preset Configuration	34
180 / 270 Degrees Preset Configuration	35
Create Custom Preset Configuration	36
Web Interface Navigation	38
Image.....	41
Video & Audio	44
Network	46
Privacy Mask.....	50
Event.....	51
System.....	57
Administration	59
Support.....	60

About Our Warranty

Global (3 Year) Limited Warranty

AV COSTAR™ warrants to Purchaser (and only Purchaser) (the “Limited Warranty”), that: (a) each Product shall be free from material defects in material and workmanship for a period of thirty-six (36) months from the date of shipment (the “Warranty Period”); (b) during the Warranty Period, the Products will materially conform with the specification in the applicable documentation; (c) all licensed programs accompanying the Product (the “Licensed Programs”) will materially conform with applicable specifications. Notwithstanding the preceding provisions, AV COSTAR shall have no obligation or responsibility with respect to any Product that (i) has been modified or altered without AV COSTAR’s written authorization; (ii) has not been used in accordance with applicable documentation; (iii) has been subjected to unusual stress, neglect, misuse, abuse, improper storage, testing or connection; or unauthorized repair; or (iv) is no longer covered under the Warranty Period. AV COSTAR make no warranties or conditions, express, implied, statutory or otherwise, other than the express limited warranties made by AV COSTAR above, and AV COSTAR hereby specifically disclaims all other express, statutory and implied warranties and conditions, including the implied warranties of merchantability, fitness for a particular purpose, non-infringement and the implied condition of satisfactory quality. All licensed programs are licensed on an “as is” basis without warranty. AV COSTAR does not warrant that (i) the operation of the products or parts will be uninterrupted or error free; (ii) the products or parts and documentation will meet the end users’ requirements; (iii) the products or parts will operate in combinations and configurations selected by the end user; other than combinations and configurations with parts or other products authorized by AV COSTAR or (iv) that all licensed program errors will be corrected.

The ConteralP® Omni LX Remote Setup (RS) motors are meant to be used for setup purposes or moving to preset positions no more than one time per day. Excessive use will void the warranty. This camera is not meant to be used as a traditional PTZ (pan tilt zoom) speed dome camera.

For RMA and Advance Replacement information visit <http://www.avcostar.com>

ConteralP Omni LX RS Megapixel Cameras

Camera Overview

The ConteralP Omni LX Remote Setup (RS) is an industry-game-changing first-of-its-kind omni-directional, remote-configurable, multi-sensor, multi-megapixel camera built to provide outstanding high-resolution video coverage for a wide range of applications. The unmatched coverage and capabilities of the ConteralP Omni LX RS provides organizations of all sizes the flexibility to deploy a surveillance camera system that truly matches their current and future requirements for complete situational awareness.

ConteralP Omni LX RS is available with a 20-megapixel (MP) resolution. The number of cameras required for a project can be dramatically reduced with a single ConteralP Omni LX RS because of its four customizable remote sensor gimbals which allow fast and easy installation. You simply install the hinged mounting plate, connect the PoE+ (Power-over-Ethernet) IP cable, and then remotely configure the camera. When configuring the camera, you can select a “Preset” choice for 180°, 270°, or 360° views. Or use the intuitive interface to remotely pan, tilt, zoom and focus each sensor. Also, two custom presets created by the user can be saved to memory. The camera is integrated with the industry’s leading VMS/NVR platforms, and the microSDXC card slot supports up to 1TB of storage capacity for convenient onboard storage.

ConteralP Omni LX RS is ideal for applications with normal or challenging lighting conditions. The Omni combines a day/night mechanical IR cut filter for the highest image quality at any time of day. For clear color images in low-light, NightView™ offers strong low-light sensitivity for capturing details in extremely poor-lit scenes. Power can be supplied via a single PoE+ (802.3at) compliant network cable or via a 24–48V DC/24V AC power supply.

ConteralP Omni LX RS is designed for demanding environments. Certified with rigorous dust and water tests, the camera carries an IP66 rating. The rugged dome housing is IK-10 rated to withstand the equivalent of 55kg (120lbs) of force for vandal-prone applications.


AV Costar was the first to bring H.264 to the mainstream market and recently developed SNAPstream™ (Smart Noise Adaptation and Processing) technology for reducing bandwidth without impacting image quality. Today we are proud to offer our next generation H.265 with SNAPstream+™ smart codec capable of delivering high quality video while saving over 50% of the data rate to reduce or prevent strain on the network.

The ConteralP Omni LX RS is ONVIF (Open Network Video Interface Forum) Profile S, G, and T compliant, providing interoperability between network video products regardless of manufacturer.

Package Contents

- AV20576RS

Description	QTY
AV20576RS IP camera	1
Mounting Template	1
Accessory Pack	1

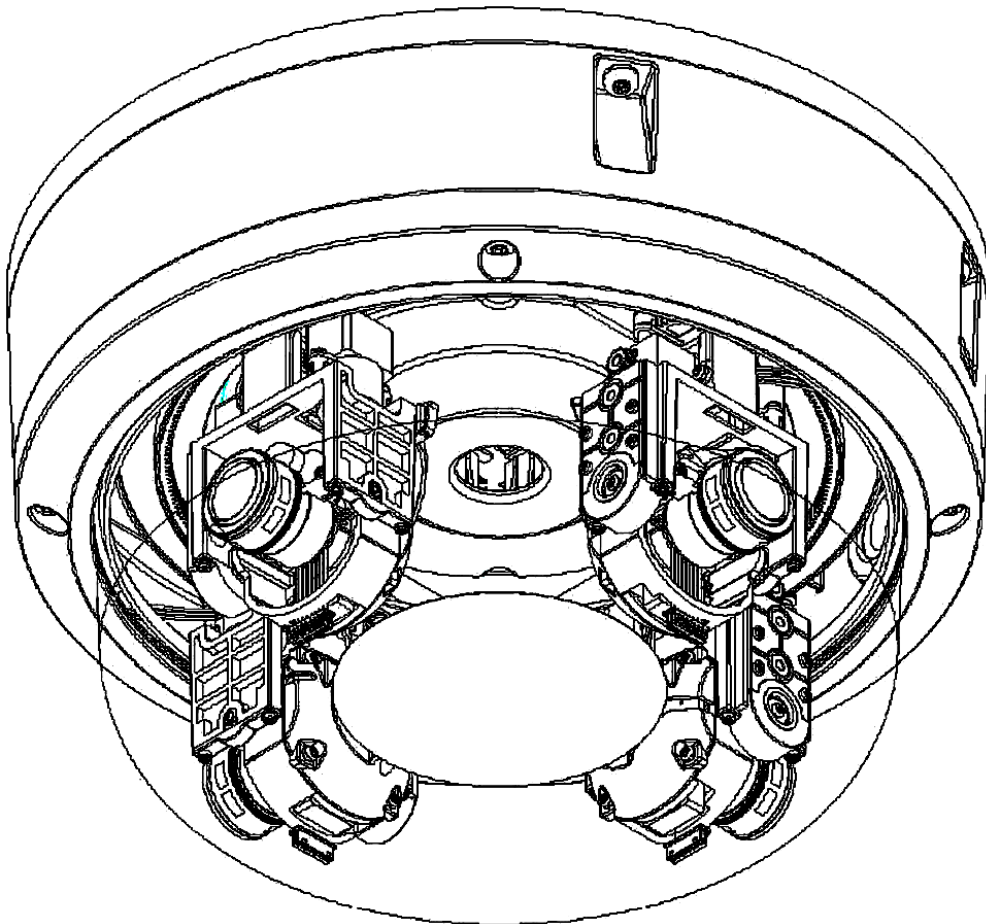

Installation

Accessories

AV Costar offers various mounting solutions for the ConteralP Omni LX RS series of cameras that provide wall, pendant, and corner mounting options. Please visit the camera models' webpage on www.avcostar.com or contact your local sales representative for information on all accessories.


Model Number	Description
AV-1AK	Audio Cable Kit
AV-CRMA-W	Corner Mount Adapter (AV Costar White)
AV-PMA-W	Pole Mount Adapter (AV Costar White)
AV-PMJB-W	Pendant Mount Bracket with Standard Junction Box (AV Costar White) (Fits Cap 1.5" NPT, Box Fits 3/4" NPT)
AV-WMJB-W	Wall Mount Bracket with Standard Junction Box (AV Costar White) (Fits Cap 1.5" NPT, Box Fits 3/4" NPT)
SO3-CAP-W	Mounting Cap for ConteralP Omni LX RS (AV Costar White)
SO3-FMA	ConteralP Omni LX RS Flush Mount Adapter (White)

Surface Mount


We recommend placing the ConteralP Omni LX RS camera directly on the hard ceiling.

Template, anchors and screws are provided for mounting the camera.


1. Determine a secure location to mount the camera.
2. Use the supplied security L-key to loosen the four screws securing the dome cover. Do not remove screws from the dome cover.

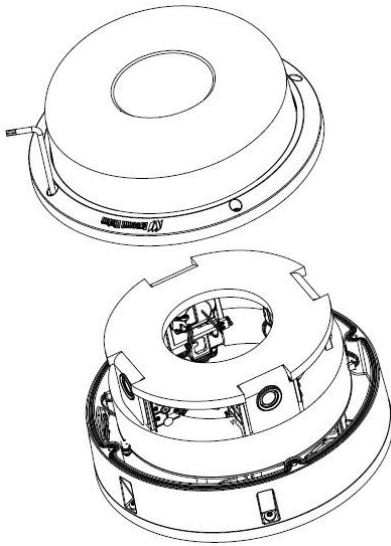


3. Remove and discard the protective foam.

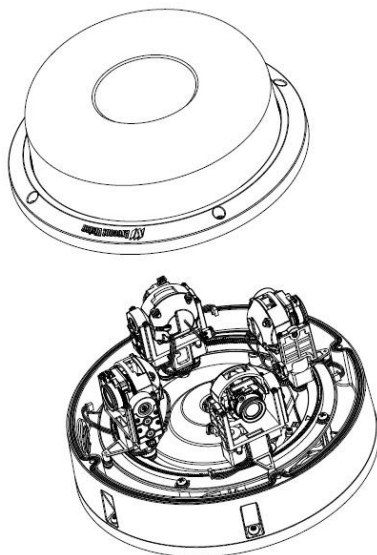


4. Reattach the dome cover to the camera.

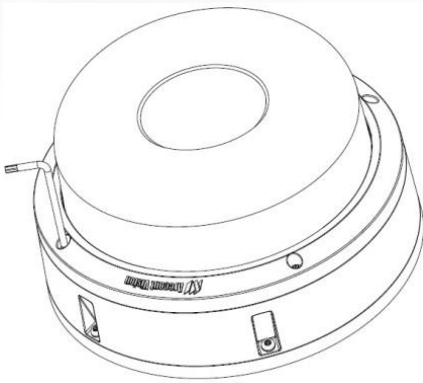


5. If the 180°, 270°, or 360° preset configurations are being used, orient the camera such that the arrow denoting the front of the camera is pointing towards the center of the desired field of view.

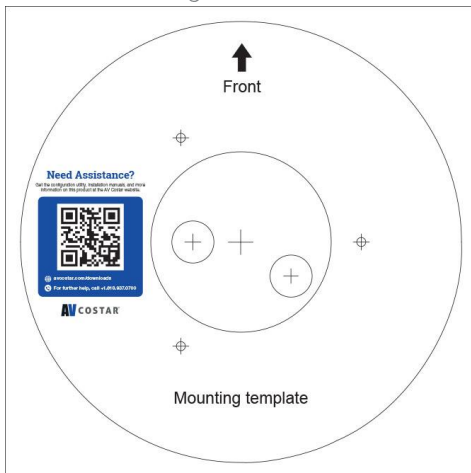


6. Attach the mounting plate to the ceiling using the supplied mounting hardware.

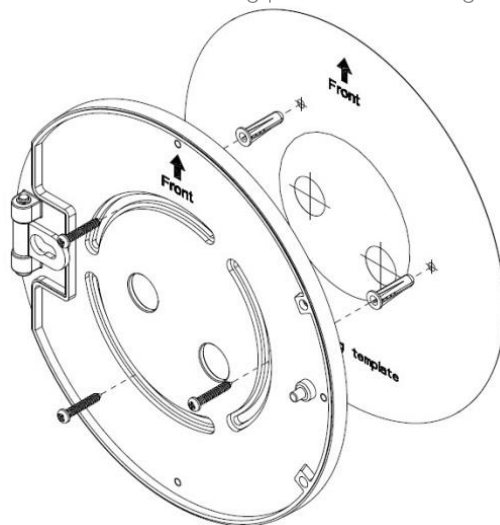


7. Attach the camera to the mounting plate as shown in the image below. The camera will “hang” from the hinge once properly attached.

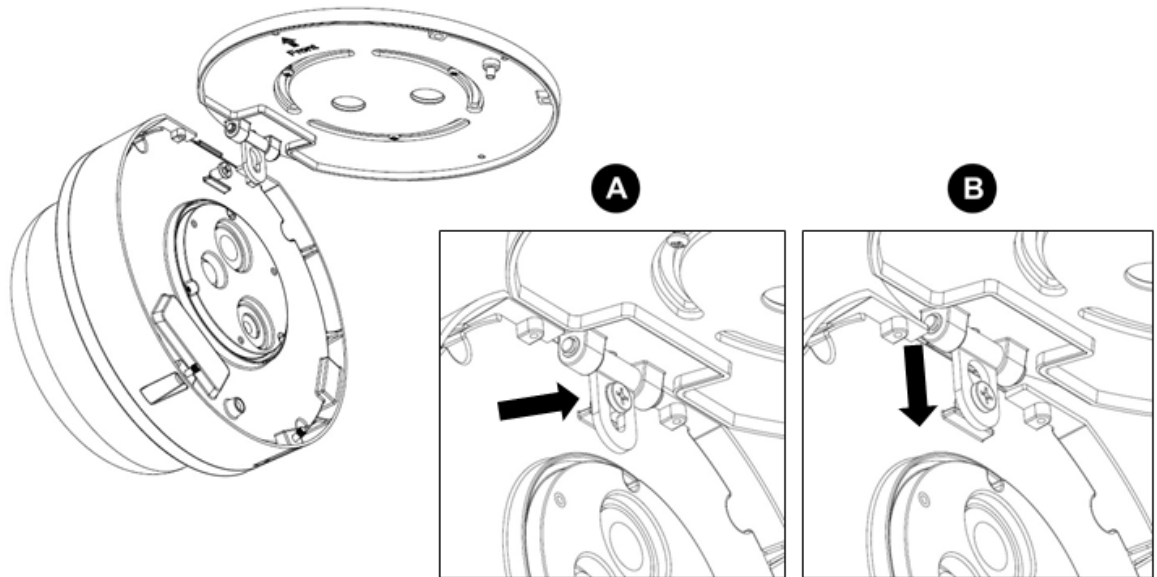


8. Use a Phillips head screwdriver to loosen the three (3) screws on main housing cover to access the network port.

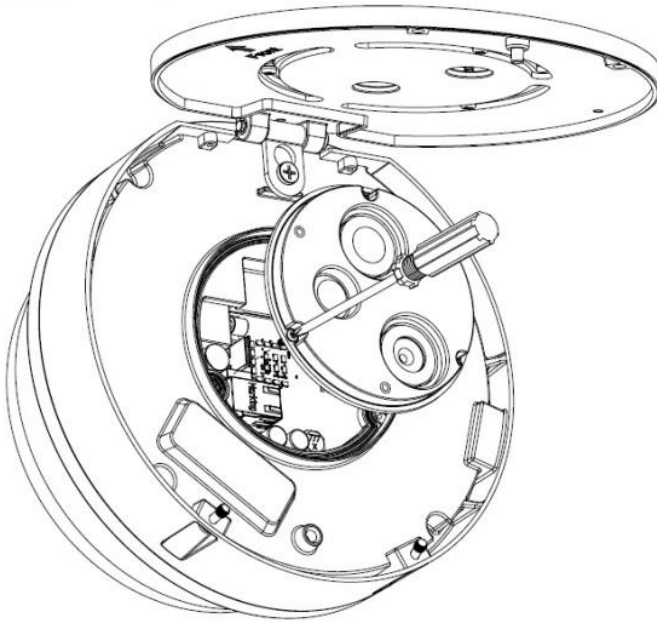

9. Run the Ethernet Cable (and the supplied power cable, I/O cable if necessary) through the cable entry holes on the mounting plate.

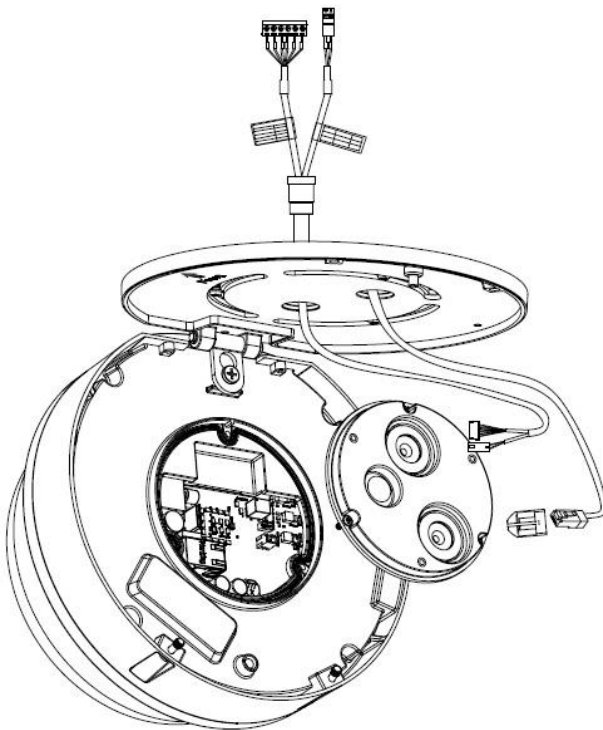


10. Prepare the network cable (and the supplied power cable, I/O cable if necessary) with the supplied grommets by using the insertion tool or terminate the RJ-45 connector to the cable after passing through the grommet.


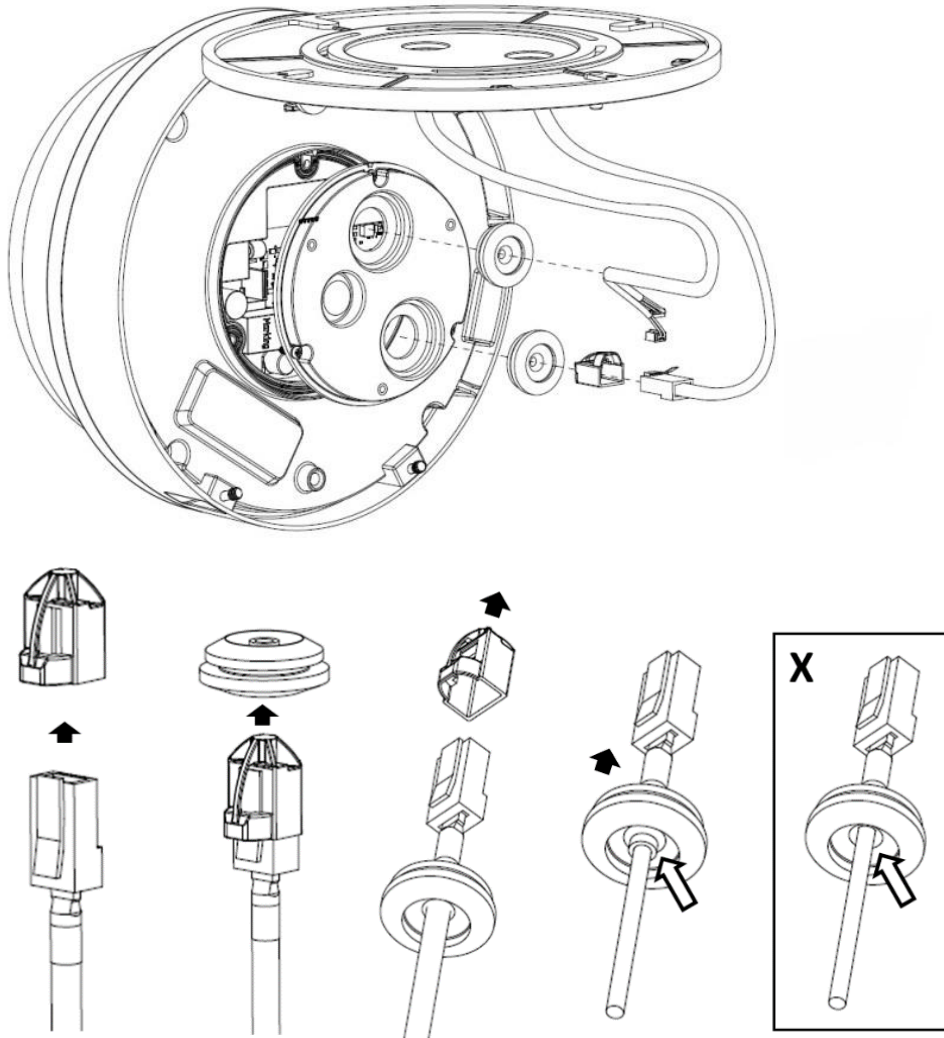


NOTE: The supplied grommet is required when mounting the camera outdoors or in a wet environment. Ensure the grommet properly seats flush with the camera housing to create a water-tight seal.

11. Connect the network cable (and the supplied power cable, I/O cable if necessary) to the corresponding connectors inside the camera.

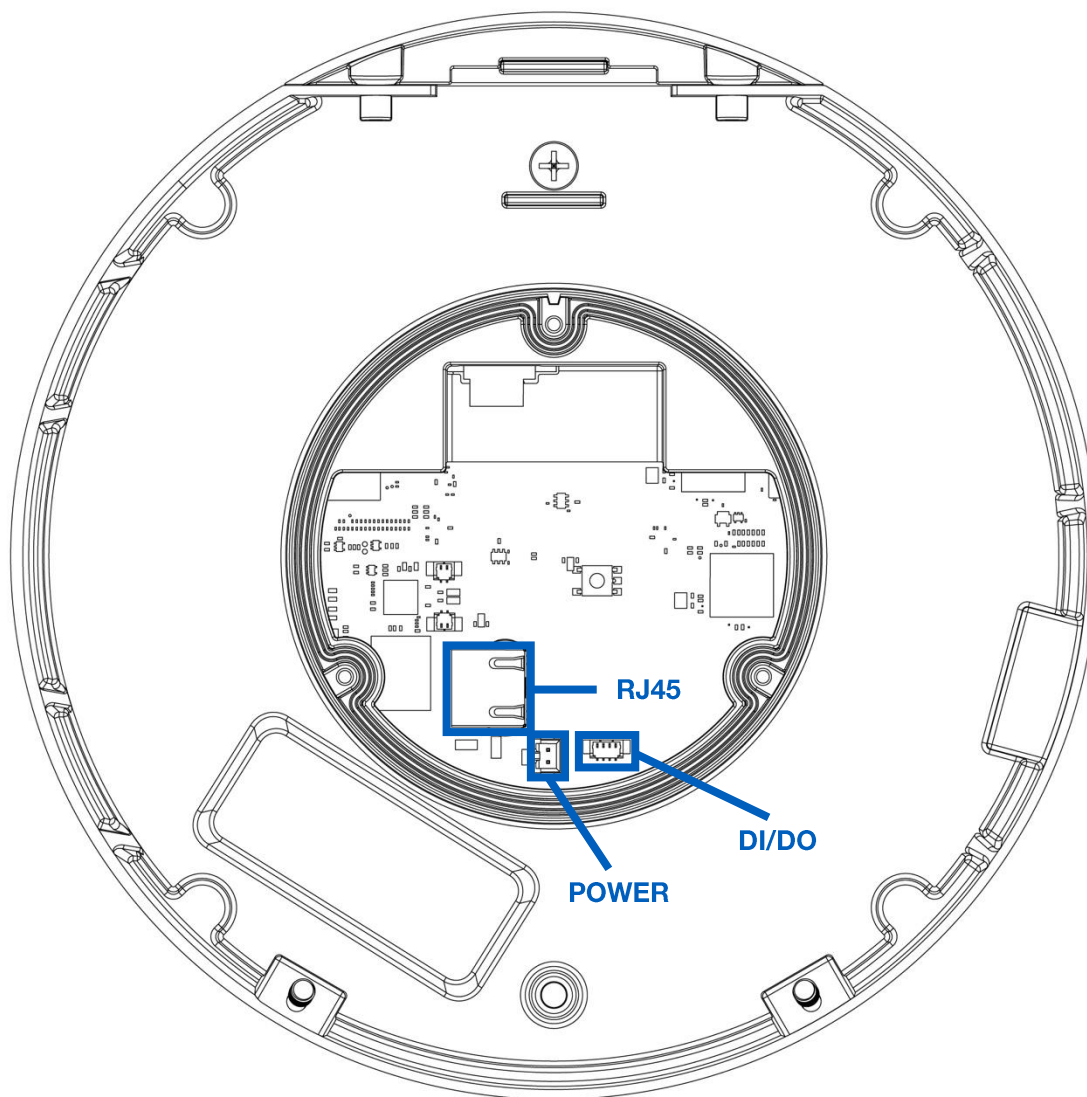


12. Align the holes on main housing cover with the holes on mounting plate, and then install the main housing cover back on the camera.

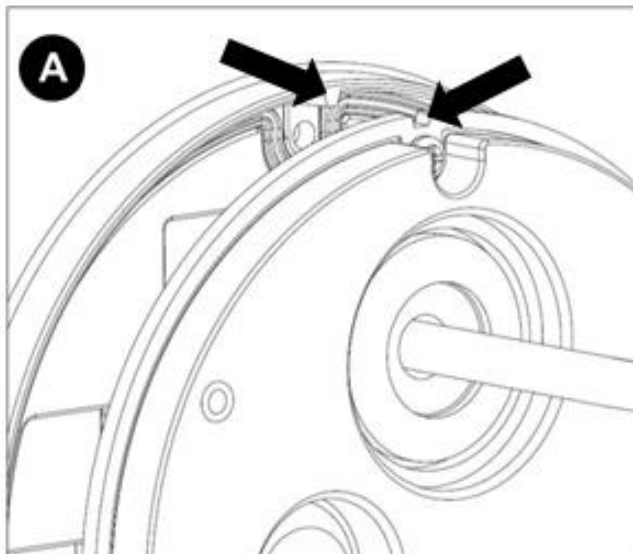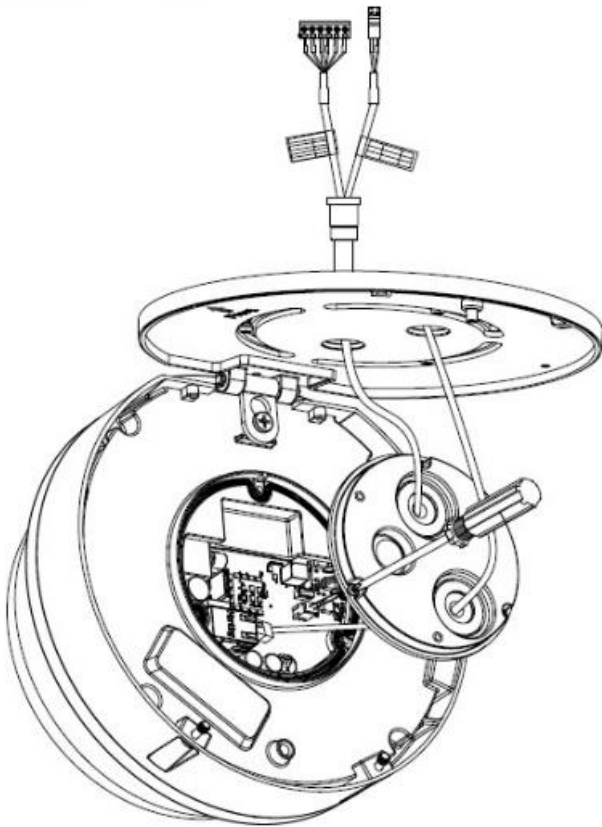


NOTE: If using the side connection of the NPT port, you need to install the supplied grommet without a hole on the main housing cover, and then remove the cap covering the side entrance, otherwise; leave the cap in place. If using the NPT port, always use Teflon tape around the threads to ensure proper sealing. The conduit fits $\frac{3}{4}$ " NPT standard.

13. Use the supplied security L-key to attach the camera to the mounting plate.

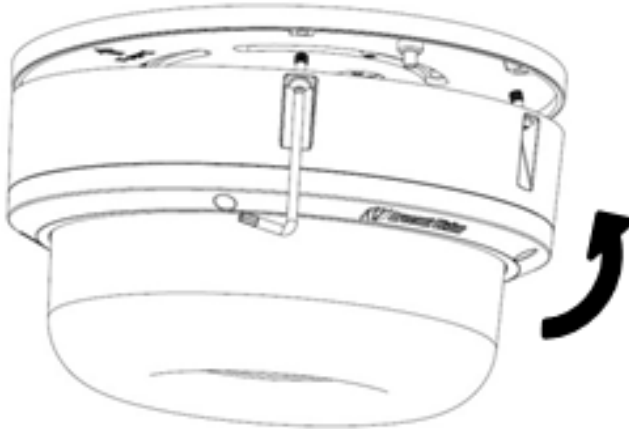

14. Swing the camera up into place, and then use a Phillips head screwdriver to the camera to the mount plate. Use caution to not bend or pinch the cables during this step.
15. Secure the cover plate as shown in the image below.

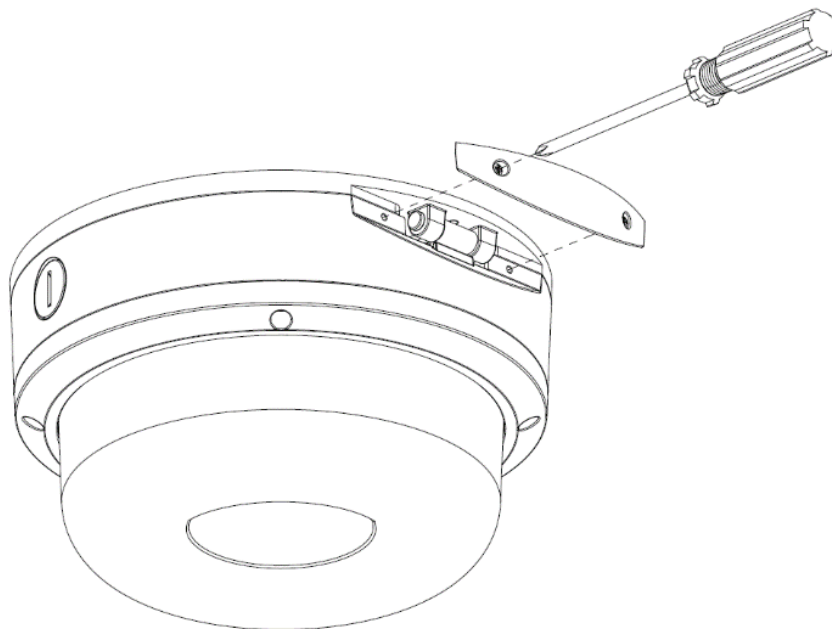

16. Remove the protective film at the end to avoid leaving fingerprints, scratches, or any damage on the dome cover during the installation.

NOTE: To configure the camera, reference the camera discovery, set-up, and configuration section.




CAUTION! The captive screws must be used to properly secure the dome cover and camera housing. Failure to use the captive fastener may result in serious injury. When mounting the dome cover to the camera housing, ensure that the gasket is properly seated and not folded. Failure to do so may result in water and dust ingress. Water damage from improper installation is not covered by the warranty!


Pendant Mount

Reference #	Pendant Mount Components Required
1	Pendant mount (AV-PMJB-W) with an integrated junction box
2	ConteralP Omni LX RS camera
3	SO3-CAP-W mounting cap

For a proper pendant mount installation, the AV-PMJB-W pendant mount and SO3-CAP-W mounting cap are required (sold separately).

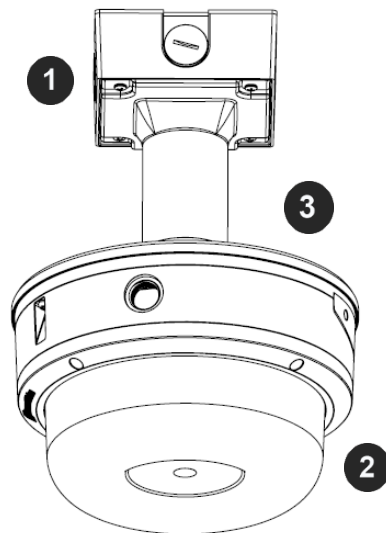


1. Determine a proper location to place the ConteralP Omni LX RS camera.
2. Use the mounting template and prepare the mounting provisions.
3. Connect SO3-CAP-W, pendant pole and mount together.

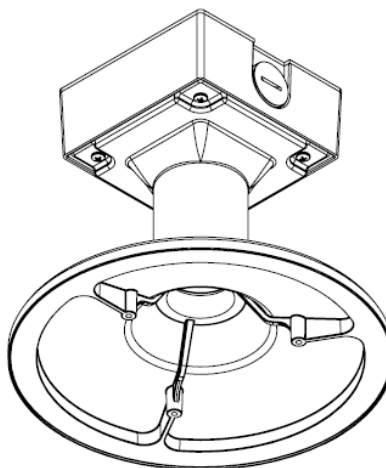


NOTE: The thread size of top shield, pendant pole and mount is 1.5" NPT.


4. Attach the pendant mount to the ceiling using the 4 wood screws are provided for mounting or other optional hardware.
5. Run the ethernet cable and outside power cable (if necessary) through the rubber gasket which is supplied through the pendant mount. Ensure the gasket is sealed properly.
6. Use the L-key to loosen the four torx-in screws which are provided to secure the dome cover.

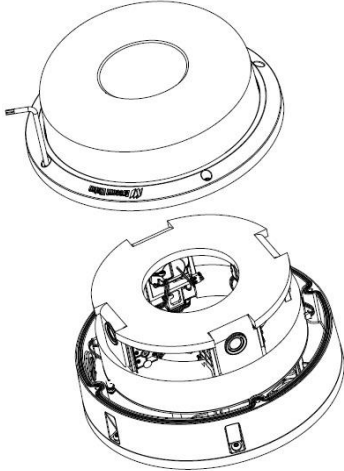


7. Remove the dome cover and the protective foam in the middle. Do not remove the torx-in screws from the dome cover.

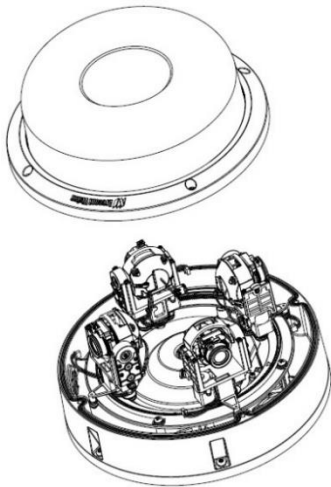

8. Reattach the dome cover to the camera.

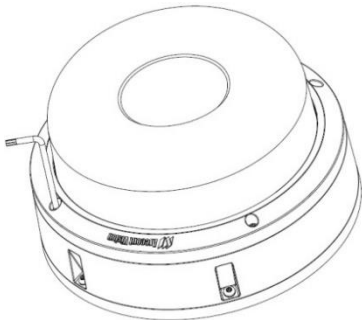

9. If the user chooses to use the configuration presets (180°, 270°, or 360°) for adjusting the arrow on the template towards to the center of desired field of view. This will create the same center for the field of view for the camera.
10. Attach the mounting plate to the SO3-CAP-W with the screws which are supplied.

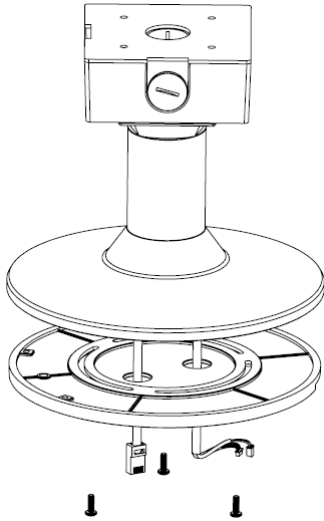

11. Follow the same steps as Surface Mount Installation to complete the installation.

To configure the camera, reference the Camera Discovery, Set-up and Configuration section.




CAUTION! The captive screws must be used to properly secure the dome cover and camera housing. Failure to use the captive fastener may result in serious injury. When mounting the dome cover to the camera housing, ensure that the gasket is properly seated and not folded. Failure to do so may result in water and dust ingress. Water damage from improper installation is not covered by the warranty!


Wall Mount

Reference #	Required Wall Mount Components
1	Wall mount (AV-WMJB-W) with an integrated junction box
2	ConteralPOmni LX RS camera
3	SO3-CAP-W mounting cap

For a proper wall mount installation, the AV-WMJB-W wall mount and SO3-CAP-W wall mount cap are required (sold separately).

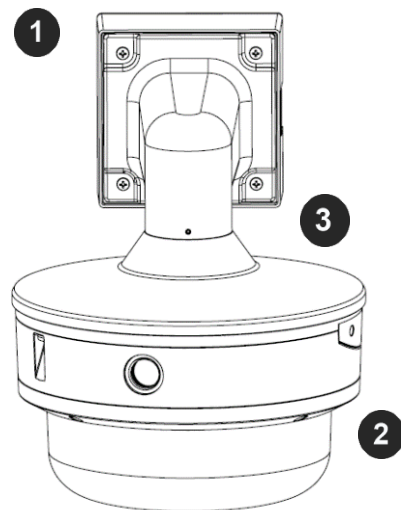


1. Determine a proper location to place the ConteralP Omni LX RS camera.
2. Use the mounting template, and then prepare the mounting provisions.
3. Connect SO3-CAP-W cap and wall mount together.

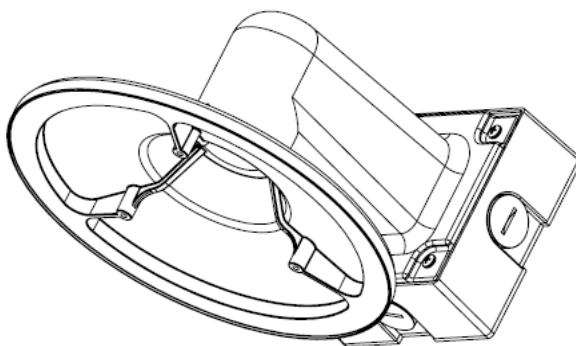


NOTE: The thread size is 1.5" NPT for Top shield, Pendant pole and Mount.

4. Attach the wall mount to the wall by using the four drywall screws which are provided or any optional hardware suitable for the mounting surface.


5. Run the ethernet cable and outside power cable (if necessary) through the rubber gasket which is supplied, then let them pass through the wall mount. Ensure the gasket is sealed properly.
6. Use the L-key to loosen the four torx-in screws which are provided to secure the dome cover.

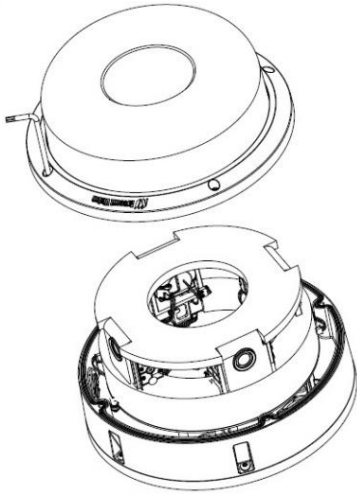


7. Remove the dome cover and the protective foam in the middle. Do not remove the torx-in screws from the dome cover.

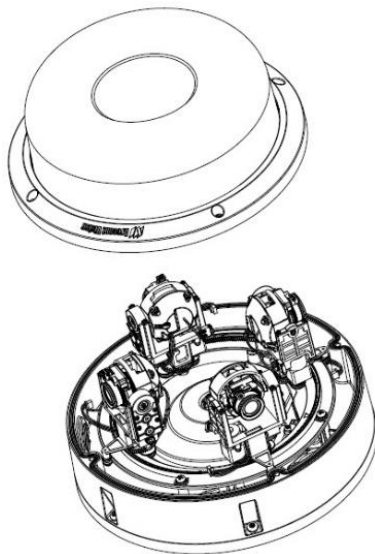

8. Reattach the dome cover to the camera.

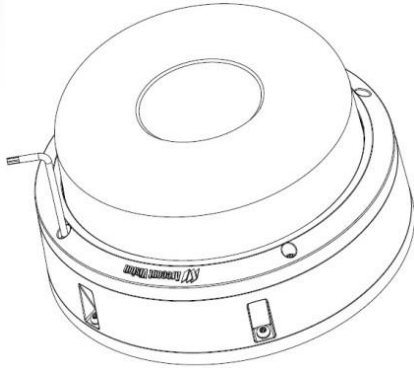

9. Attach the mounting plate to the SO3-CAP-W with the screws supplied.

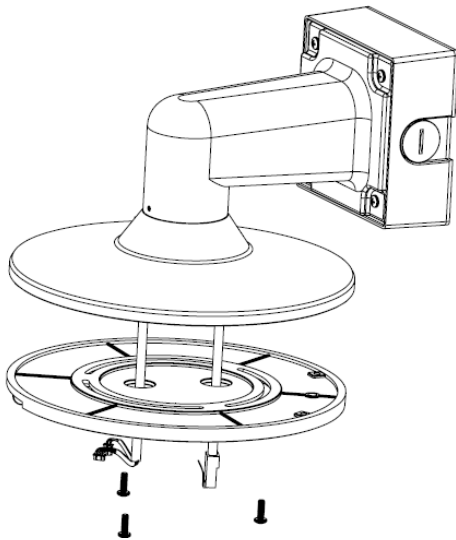


10. Follow the same steps as Surface Mount Installation to complete the installation.



CAUTION! The captive screws must be used to properly secure the dome cover and camera housing. Failure to use the captive fastener may result in serious injury. When mounting the dome cover to the camera housing, ensure that the gasket is properly seated and not folded. Failure to do so may result in water and dust ingress. Water damage from improper installation is not covered by the warranty!


Pole Mount

Reference #	Required Pole Mount Components
1	Wall mount (AV-WMJB-W) with integrated junction box
2	ConteralP Omni LX RS camera
3	SO3-CAP-W mounting cap
4	AV-PMA-W pole mount adapter

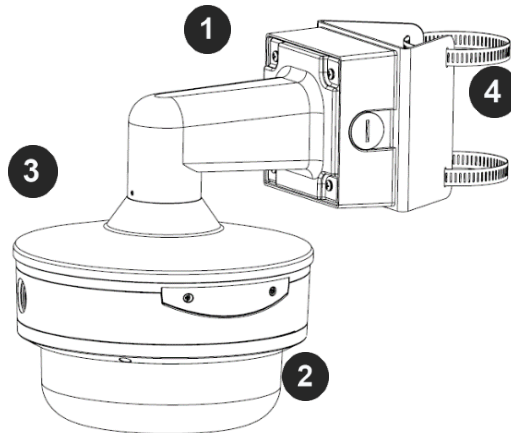

For a pole mount installation, AV-WMJB-W wall mount, AV-PMA-W pole mount, and SO3-CAP-W mount cap are required (sold separately).

1. Use the mounting template, and then prepare the mounting provisions.
2. Connect the wall mount cap and wall mount together.
3. Attach the Junction Box Adapter to the Pole Mount Adapter.

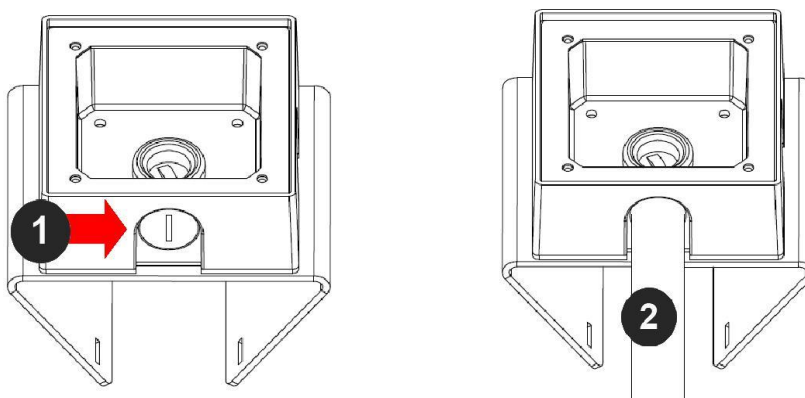


4. Remove the conduit plug on the junction box adapter, then connect $\frac{3}{4}$ " NPT conduit to the junction box adapter.

Reference #	Description
1	Remove conduit plug
2	Connect $\frac{3}{4}$ " NPT conduit to junction box adapter (Recommended: use of waterproof tape)

NOTE: Use silicon or water pipe seal tape to make sure there is no water leakage between conduit pipe and junction box adapter.

5. Run the ethernet cable and outside power cable (if necessary) through the rubber gasket which is supplied, then pass through the Junction Box Adapter and AV-WMJB-W, Wall Mount Adapter. Ensure the gasket is sealed properly.
6. Attach the Wall Mount Adapter (AV-WMJB-W) to the Pole Mount Adapter (AV-PMA-W) as shown below.

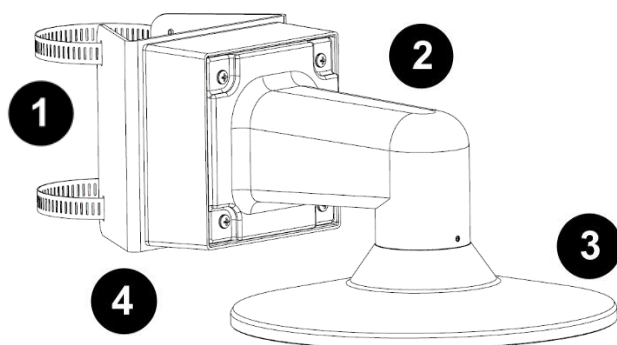


Reference #	Description
1	Steel straps with compression screws
2	AV-WMJB-W wall mount
3	SO3-CAP-W mount cap
4	AV-PMA-W pole mount
5	Apply Teflon waterproof tape to the thread of $\frac{3}{4}$ " NPT pipe to avoid water leakage

7. Use two Steel Straps which are supplied to attach the Pole Mount Adapter to the pole and tighten the compression screws.
8. Refer to the Wall Mount section for attaching the camera to the Wall Mount Adapter (AV-WMJB-W).
9. To configure the camera, refer to the Camera Discovery, Set-up and Configuration section.


Corner Mount

Reference #	Required Corner Mount Components
1	Wall mount (AV-WMJB-W) with an integrated junction box
2	ConteralP Omni LX RS camera
3	SO3-CAP-W mounting cap
4	AV-CRMA-W corner mount adapter

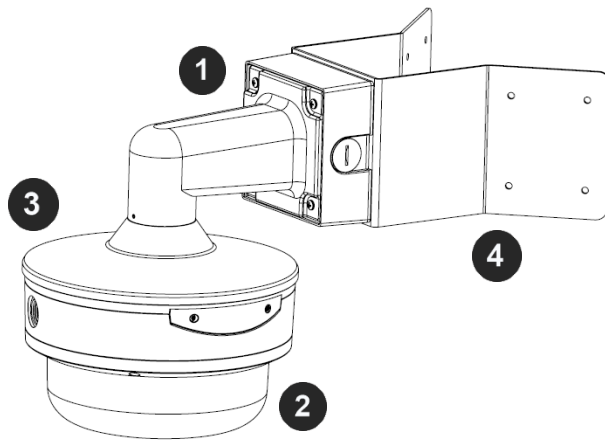

For a corner mount installation, the AV-WMJB-W wall mount, AV-CRMA-W corner mount, and SO3-CAP-W mount cap are required (sold separately).

1. Use the mounting template and prepare the mounting provisions.
2. Connect the wall mount and the wall mount cap together.
3. Attach the AV-JBA-W Junction Box Adapter to the Corner Mount Adapter as shown below.

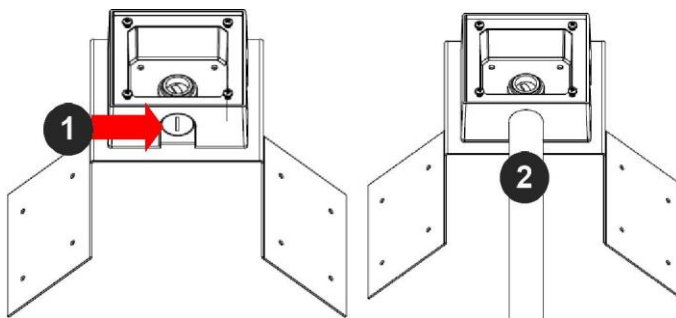


4. Remove the conduit plug from the junction box adapter, then connect $\frac{3}{4}$ " NPT conduit to the junction box adapter as shown above.

Reference #	Description
1	Remove the conduit plug.
2	Connect ¾" NPT conduit to junction box adapter (ensure to use the waterproof tape).

NOTE: Use silicon or water pipe seal tape to make sure there is no water leakage between conduit pipe and junction box adapter.

- Run the ethernet cable and outside power cable (if necessary) through the rubber gasket which is supplied, then pass through the Junction Box Adapter and AV-WMJB-W, Wall Mount Adapter. Ensure the gasket is sealed properly.
- Attach the Wall Mount Adapter (AV-WMJB-W) to the Corner Mount Adapter (AV-CRMA-W) as shown below.

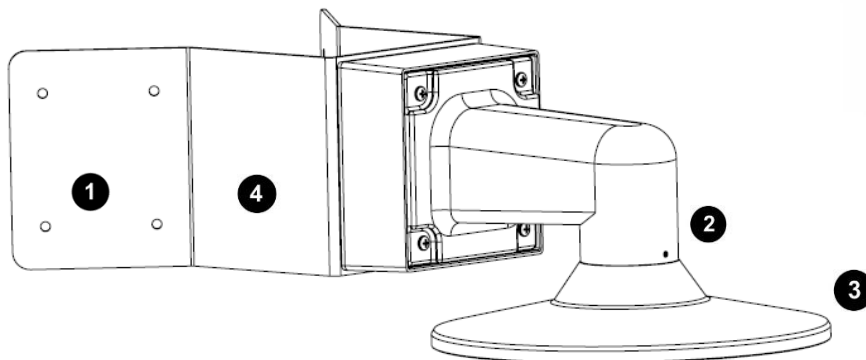

Reference #	Description
1	Attach corner mount adapter to an exterior 90-degree corner wall
2	AV-WMJB-W wall mount
3	SO3-CAP-W mount cap
5	AV-CRMA-W corner mount adapter
6	Apply Teflon waterproof tape to the thread of ¾" NPT pipe to avoid water leakage

- Use the provided screws or other hardware to attach the Corner Mount Adapter on an exterior 90-degree corner wall.
- To attach the camera on the Wall Mount Adapter (AV-WMJB-W), refer to the Wall Mount section.

To configure the camera, refer to the Camera Discovery, Set-up and Configuration section.



CAUTION! The captive screws must be used to properly secure the dome cover and camera housing. Failure to use the captive fastener may result in serious injury. When mounting the dome cover to the camera housing, ensure that the gasket is properly seated and not folded. Failure to do so may result in water and dust ingress. Water damage from improper installation is not covered by the warranty!

Camera Power Up




CAUTION! This product should be installed by a qualified service technician in accordance with the National Electrical Code (NEC 800 CC Section 60) or applicable local code. Wiring methods should be in accordance with the National Electrical Code/NFPA 70/ANSI, also with all local codes and authorities having jurisdiction. Wiring should be UL Listed and/or Recognized wire suitable for the application.




CAUTION! Make the connections inside a watertight compartment. Isolate unused power wires individually. After connections are made, ensure that the watertight compartment is tightly closed, and cables and conduits are properly sealed to prevent ingress of water.

1. Connect the camera to a PoE+ port on 1000Mbps network PoE+ switch using an Ethernet cable.
2. If the camera is powered by an external 24–48V DC/24V AC power supply must be supplied.

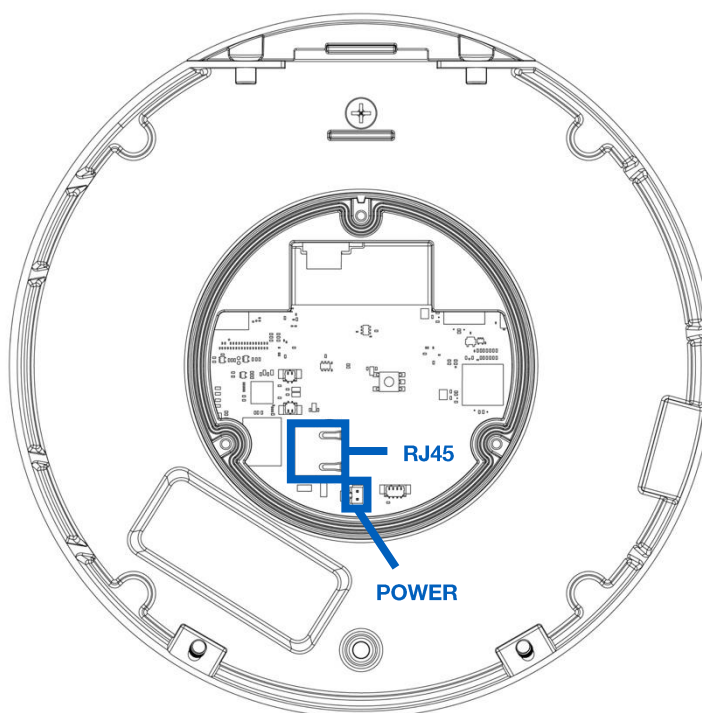


NOTE: This product is intended to be supplied by a Listed Power Adapter or DC power source, rated (1) 24V AC, 50/60Hz (Max. 26W); (2) 24V DC – 48V DC (Max. 26W); (3) 42.5–57V DC (Max. 25.5W) for PoE+, Tma = 50°C, and the altitude of operation = 2000m. If need further assistance with purchasing the power source, please contact AV Costar for further information. Ensure the power cord connection of the power adapter to a socket-outlet with an earthing connection.

3. Connect the PoE+ switch to your computer's network port by using an ethernet cable.

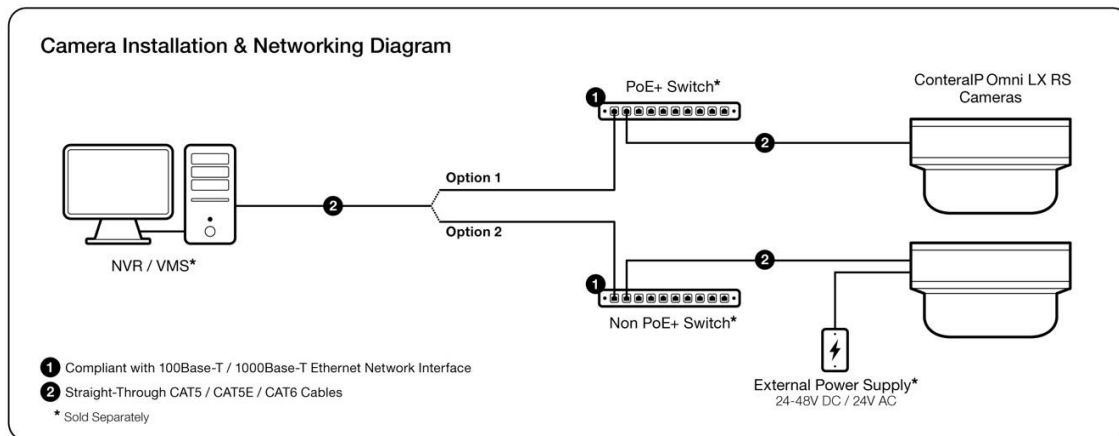

LED	Status	Description
Green	Quick Flashing	Link has been established
	Slow Flashing	Normal operation
None	None	No Connection

Alarm I/O Functions

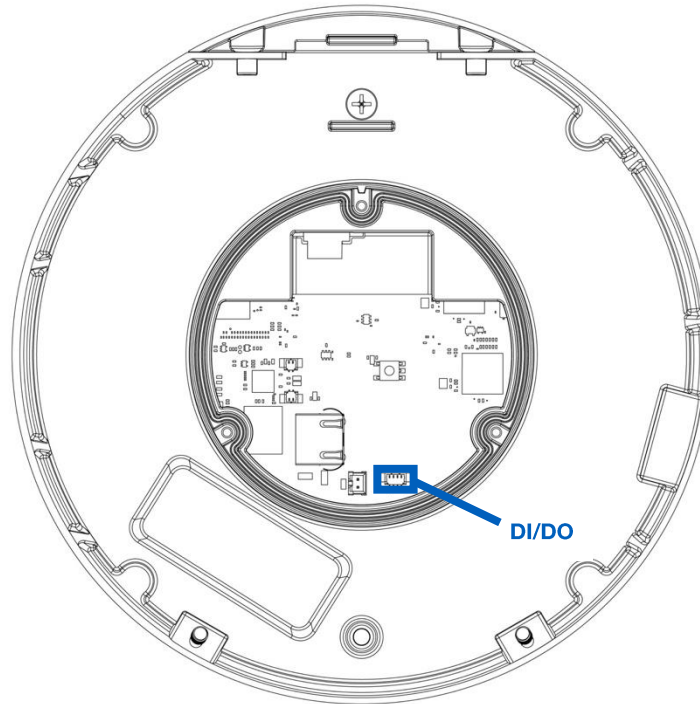


Connect the Alarm In (DI) connector to the alarm input sensor, and then connect the Alarm Out (DO) connector to the alarm output signal.

To avoid any damage, please follow the specification of the part as below:

Alarm In (Wet Contact)		Alarm Out (Wet Contact)	
3.5-12 VDC	50mA (max)	0-30 VDC	50mA (max)

Reset to Factory Default


1. Press and hold the reset button for 2 to 5 seconds, then release the reset button.
This resets the camera to the factory default except for the network settings.
2. Press and hold the reset button for more than 5 seconds, then release the reset button.
This resets the camera to the factory default, and this resets the network settings to the factory default.

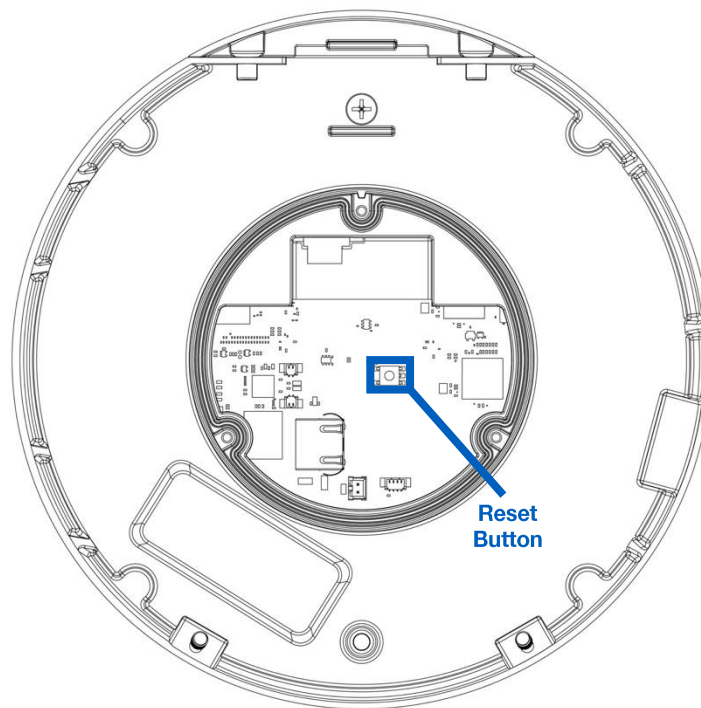


3. Also, the user can reset the camera to factory default via the camera web interface or the Costar Utility.

Audio/SD Card Info

- MicroSDXC Card Slot

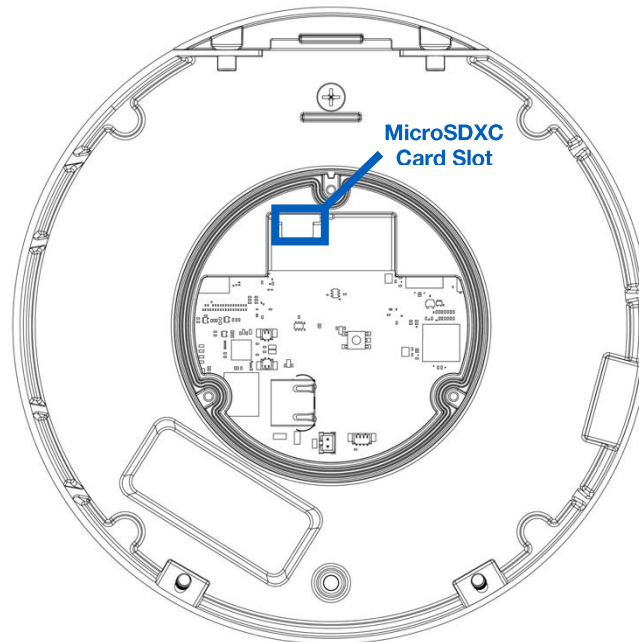

- Audio Connectors

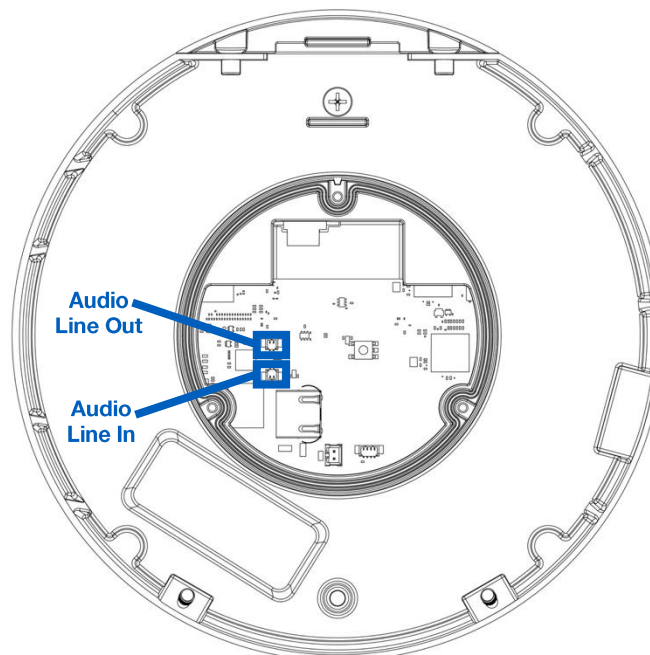

NOTE: Audio functionality requires the AV-1AK Audio Cable Kit (Sold Separately)

Camera Discovery, Setup, and Configuration

AV Costar Utility is recommended for camera discovery and setup. Software can be found on the website of AV Costar <http://www.arecontvision.com/software.php>.

The AV Costar Utility can provide multiple discovery options including broadcast and multicast, check the status of a camera, change the camera settings, import and export camera settings via a .csv file, and update firmware and/or hardware from virtually anywhere with a network connection.

The AV Costar Utility tool is efficient and convenient for mass or single camera uploads whether used for large installations that require an update to multiple settings, or smaller installations where only one camera needs to be changed.


The AV Costar Utility version v3.1.2x+ tool is compatible with all AV Costar ConteralP cameras. The user manual for the software is available on our website.

Camera Discovery


1. Locate and double click Costar Utility shortcut on the desktop and login.



2. When the Costar Camera Utility is launched, it will automatically search the network for AV Costar and CostarHD cameras on the network and over a time interval. You can also manually search cameras by clicking the “Refresh” button.

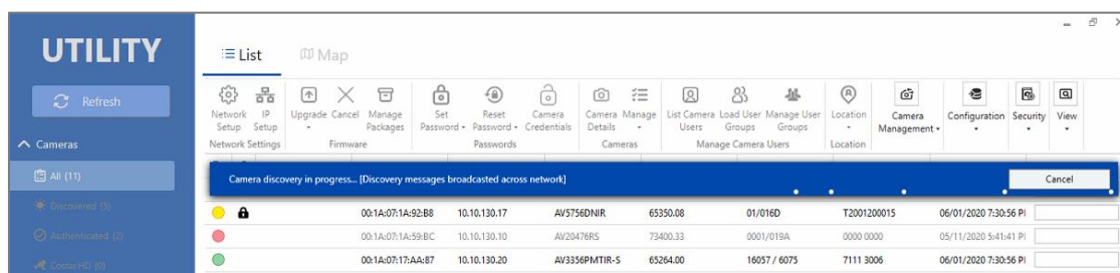

3. You can access the camera web user interface by typing the camera IP address on the preferred web browser.



4. If there is no DHCP server present in the network, the camera will default to the following IP Address “192.168.1.168”.

NOTE: A password must be entered before the camera can be used. To choose a password, visit the camera’s webpage or use the configuration utility.



INITIAL PASSWORD SETUP

Prior to accessing this device for the first time a unique admin password must be created:

User Name: **admin**

Password:

Confirm Password:

OK

Prior to accessing this device for the first time a unique admin password must be created

Camera Preset Configurations

The AV Costar ConteralP Omni LX RS camera supports three (3) predefined camera preset configurations: 180 degrees, 270 degrees, and 360 degrees. Also, the camera supports two custom preset configurations. To control the camera preset configurations via the web interface, click the Presets Tab on the main menu.




NOTE: ConteralP Omni LX RS camera is not used as traditional high speed PTZ camera. The motorized movement of the camera gimbals is meant for setup and configuration only. Movement of the modules more than one time per day will void the warranty.

NOTE: Module CH2 will not pass the FRONT position shown on the mounting plate in order to avoid the cable routing problems.

NOTE: Modules will stop moving once they hit the module next to it during pan movement in either direction.


NOTE: Live video is disabled during pan/tilt adjustment.

- Home position
Four camera modules will move to the position as the image below. All four modules zoom out to widest angle, and tilt up to zero degree.

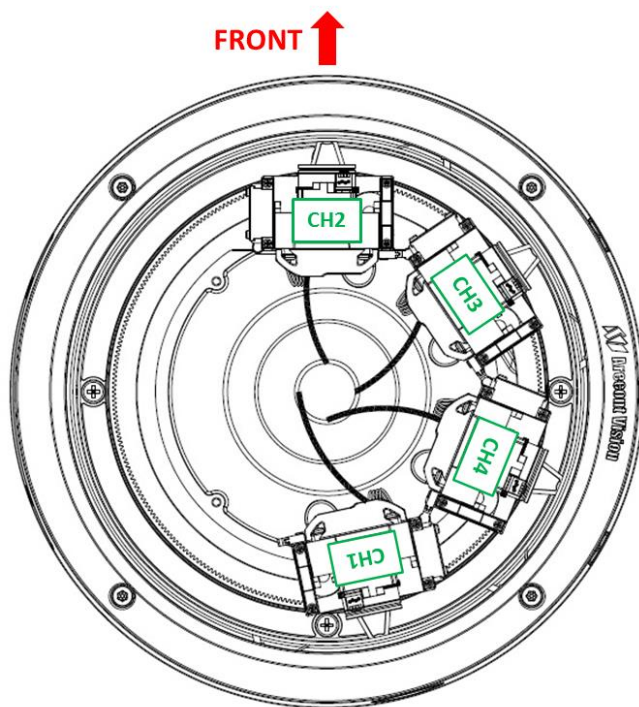


- 180 degrees preset configuration

Four camera modules will move to the positions as the image below. CH1/2/3 zoom in to 60 degrees H-FOV, and tilt down to 37 degrees. CH4 zooms out to widest angle, and tilt down to 135 degrees.

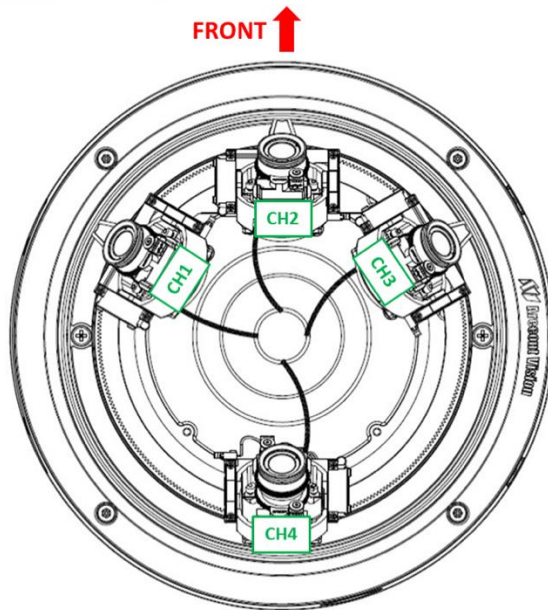


- 270 degrees preset configuration
Four camera modules will move to the positions as the image shown. CH1/2/3 zoom in to 90 degrees H-FOV, and tilt down to 37 degrees. CH4 zooms out to widest angle, and tilt down to 135 degrees.

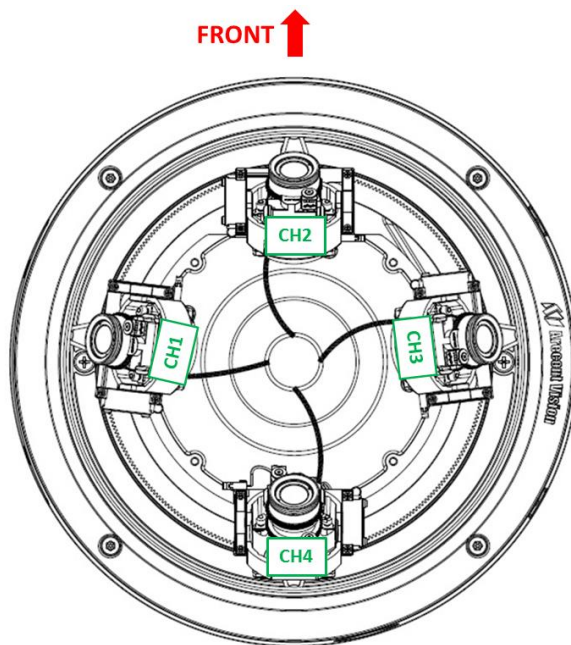


- 360 degrees preset configuration

Four camera modules will move to the positions as the image below. All four modules zoom in to 90 degrees H-FOV, and tilt down to 37 degrees.

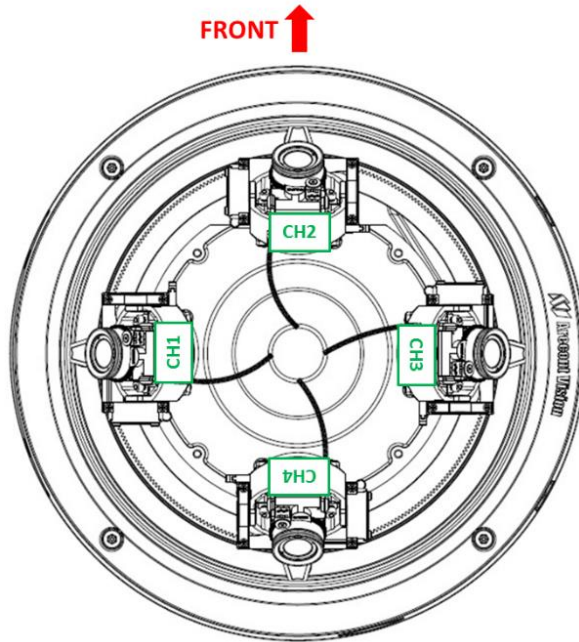

- Custom preset configuration
User can define custom pan/tilt/zoom positions as the image below.

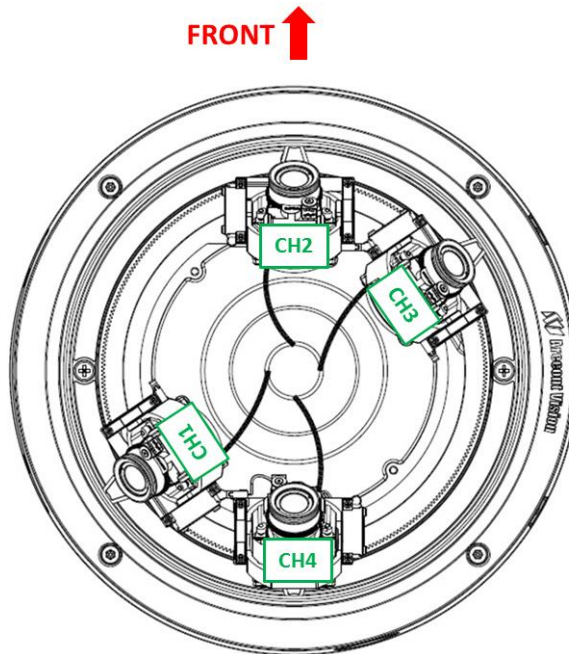

Home Position / 360 Degrees Preset Configuration

1. In the “Preset buttons” section, click “Home” or “360”.

Preset Buttons

Select Preset

Home 360

270 180

User Preset 1 User Preset 2

User Specified Presets

Create Preset 1 Create Preset 2

Save Preset 1 Save Preset 2

2. To make an adjustment on all four camera modules without selecting each camera module individually; you can select “1-4” from the drop list.

Channel Selects[Focus/Pan - select individual channel; Tilt/Zoom - channels are based on button selection]

Focus/Pan 1 2 3 4 1-4 Tilt/Zoom All

Message: PTZ In 360 state

Focus

Focus:

+20 +5 +1

-20 -5 -1

Full-range Focus

Short-range Focus

Stop

Focus Aid:

Update Focus Aid

Pan

Status: done

Clockwise

+20 +10 +5 +1

Counterclockwise

-20 -10 -5 -1

Tilt

Up

+20 +10 +5 +1

Down

-20 -10 -5 -1

Zoom

+20 +5 +1

-20 -5 -1

3. For individual adjustment on each camera module, select the “Focus/PTZ” tab.

180 / 270 Degrees Preset Configuration

1. In the “Preset buttons” section, click “180” or “270”

2. To make an adjustment to the entire panoramic configuration (without having to select each camera module individually) you can select “1/2/3” from the drop-down menu. Doing this will allow you to modify the entire panoramic configuration.

3. To individually adjust each camera module, select the “Focus/PTZ” tab.

Create Custom Preset Configuration

1. In “Preset buttons” section, click “Create Preset 1” or “Create Preset 2”.

2. To adjust Focus/Pan/Tilt/Zoom positions for individual module or all four modules via Channel Selects.

- Once the user has a desired position for each module, click “Save Preset 1” or “Save Preset 2”.

The screenshot shows a web interface titled "Preset Buttons". It contains two main sections. The first section, "Select Preset", has buttons for "Home", "360", "270", and "180", followed by "User Preset 1" and "User Preset 2". The second section, "User Specified Presets", has buttons for "Create Preset 1", "Create Preset 2", "Save Preset 1", and "Save Preset 2". The "Save Preset 1" button is highlighted with a red rectangular box.

- Click “User Preset 1” or “User Preset 2” to get the custom preset configuration which is setup by the user.

The screenshot shows the same "Preset Buttons" interface. In this view, the "User Preset 1" and "User Preset 2" buttons in the "Select Preset" section are highlighted with a red rectangular box. The "Save Preset 1" and "Save Preset 2" buttons in the "User Specified Presets" section are no longer highlighted.

Web Interface Navigation




The entire menu is located on the top of the web interface.

The following camera settings are available on the top of the menu in the web interface, and the user will be directed to the page that they click on the menu.

- **Main Menu**
 - Flip Image
 - Reboot Camera
 - Restore Factory Defaults
- **Focus/PTZ**
 - Select Channel
 - Focus
 - Pan
 - Tilt
 - Zoom
- **Image**
 - Basic
 - Channel
 - Picture (Basic Image Settings)
 - Misc (AE Mode/AWB Mode)
 - WDR (Wide Dynamic Range) Mode
 - Day/Night Mode
 - Lighting Compensation Frequency
 - OSD (On-Screen Display)
 - General Setting
 - Text Overlay
 - ROI (Regions of Interest)
- **Video & Audio**
 - Codec
 - Channel
 - Main Stream Configuration
 - Sub Stream Configuration
 - Third Stream Configuration
 - Audio

- **Network**
 - Basic
 - IP Assignment
 - Ports
 - DNS
 - IPv6 Settings
 - QoS (Quality of Service)
 - UPnP (Universal Plug and Play)
 - RTSP (Real Time Streaming Protocol)
 - DDNS (Dynamic DNS)
 - SNMP (Simple Network Management Protocol)
 - SSL (Secure Sockets Layer)
 - FTP (File Transfer Protocol)
 - 802.1x
 - LDAP
- **Privacy Mask**
- **Event**
 - Motion Detection
 - Alarm Handler
 - Digital I/O
 - Tamper Detection
 - Network Failure
 - SD Card
 - FTP Upload
 - SMTP (Simple Mail Transfer Protocol) Notification
 - Network Storage
- **System**
 - Maintenance
 - Camera Information
 - Camera Name
 - Firmware Upgrade
 - Download Log
 - Reboot the Camera
 - Restore Settings
 - Date/Time
- **Administration**
 - Administrator settings
 - Viewer Management
- **Support**

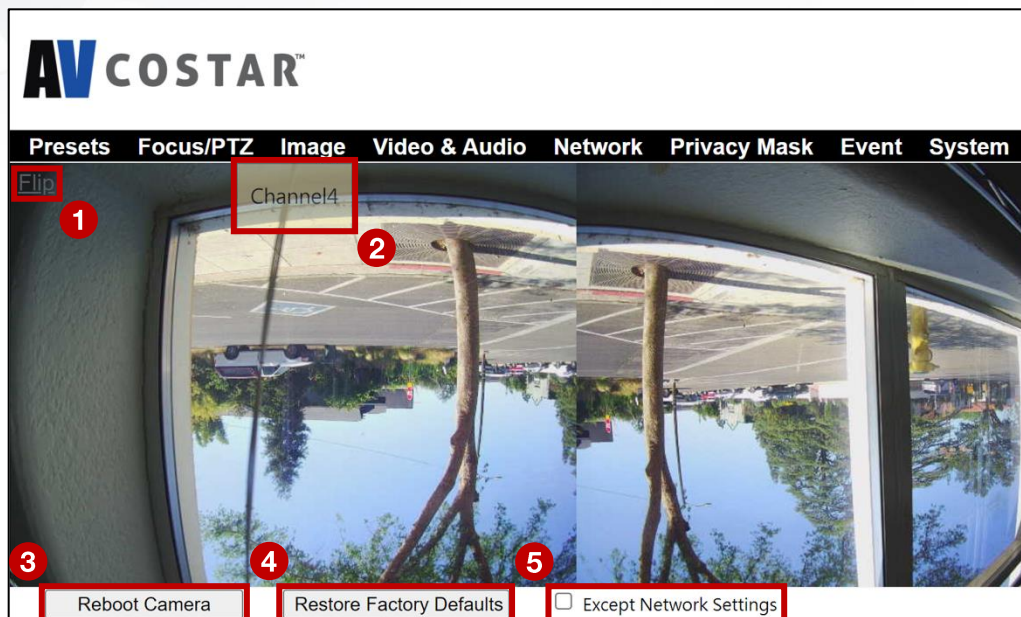

1. At the left corner on the top, you can see the “Flip” button that allows you to rotate the images up-side-down (180 degrees) with reorienting the channel order.
2. You will be able to see the Channel number when you move the mouse over the image of the channel.
3. The “Reboot Camera” button is located just below the live camera views. This button reboots the camera without changing settings.
4. To the right of the “Reboot Camera” button is the “Restore Factory Defaults” button. This button resets all settings to the factory default settings.
5. By selecting the “Except Network Settings” checkbox before pressing the “Restore Factory Defaults” button causes the network settings to be retained while resetting all other settings are restored to factory default settings.

Image



AV20576RS
Firmware: 65431
MAC: 00-1a-07-1a-a2-4a

Presets Focus/PTZ **Image** Video & Audio Network Privacy Mask Event System Administration Support

Menu	Feature	Description
Channel Select channel: 1 ▼ Sync All Channels	Select Channel	Select desired channel, 1-4. Click Sync All Channels to apply settings to all four channels.
Picture Brightness (-50...50) 0 Set Sharpness (0...4) 2 Set Saturation (0...6) 3 Set Contrast (0...100) 50 Set Hue (0...100) 50 Set	Brightness	Controls the overall brightness of the camera image and works in conjunction with the exposure controls to maintain the image brightness.
	Sharpness	Controls sharpness and edge definition of the image. Setting this to lower levels may make the overall image appear a bit softer while causing lines and edges in the image to look smoother.
	Saturation	Controls the color saturation of the image.
	Contrast	Manually controls Gamma level (affects the overall luminance of the image).
	Hue	Configures the overall hue of the image with a range of 0 ~ 100. Increasing the value will adjust the image hue towards red. Decreasing the value will adjust the image hue towards blue.
Misc ☐ Rotate AE Mode: Auto ▼ AWB Mode: Auto ▼	Rotate	Enable the image rotation on each channel.
	AE Mode (Auto Exposure Mode)	Lock: This option locks the exposure settings to the current values. Auto: If Auto is selected, each channel has individual settings of the Exposure Time Control and Gain Control. NOTE: When AE mode is set to "Lock" the camera will not update for new lighting conditions.
	AWB Mode (Auto White Balance Mode)	Auto: Enables the automatic white balance feature of camera, which will automatically remove unrealistic color cast so that the color white is rendered white in the image. Off: Select Off to disable AWB Mode.

WDR Mode ☐ Auto ☒ LDR Auto Exposure Mode Stream Profiles ☒ Balanced Mode ☒ Slow Shutter ☐ Quality Mode ☐ Moonlight Mode ☐ Custom Exposure Mode Short exposures(1~80) 33 Set	Auto	Auto detects bright backlight, glare, or high contrast lighting and automatically selects the WDR level. NOTE: Make sure AE mode is set to "Auto."
	LDR	Will not combine long and short exposures into one frame, resulting in better low light performance.
	Auto Exposure	Automatically adjusts illumination and exposure values. NOTE: Make sure AE mode is set to "Auto".
	Stream Profiles: Balance Mode -Slow Shutter Quality Mode Moonlight Mode Custom Exposure Mode	Balanced Mode: Limits exposure time from 0.1ms to 66ms. The camera will keep highest FPS when Slow Shutter is unchecked. Quality Mode: Limits exposure time from 0.1ms to 200ms. This mode is a good compromise between reducing noise and motion blur under most lighting conditions, but with an increase in motion blur under low light conditions. Moonlight Mode: Limits exposure time from 20ms to 500ms. This mode produces the best image quality under very low light conditions with the least amount of image noise. The trade-off is low noise at the expense of high motion blur. Custom Exposure Mode: Enables manual setting of exposure time between 1 and 500ms. Shorter exposure times reduces motion blur for applications such as monitoring fast moving objects and reading license plates. The trade-off is an increased level of noise. It is recommended that this mode is used only when there is constant scene illumination sufficient enough to provide a quality image.
Lighting Compensation Frequency ☐ 50 Hz ☒ 60 Hz ☐ Custom Frequency (Hz)(5~255): 60 Set	Lighting Compensation Frequency: 50Hz, 60Hz, Custom	Prevents flicker caused by the power line frequency of lighting. Choose 50Hz for Europe or China, and 60Hz for US or Japan. This parameter will have no effect when the dominant light is sunlight. Optionally, the user can select a frequency between 5Hz and 255Hz. It will be enabled when user selects "Custom".
DayNight Mode ☒ Automatic Day to Night Switching Level(0~255): 40 Set Night to Day Switching Level(0~255): 60 Set ☐ Day ☐ Night ☒ Schedule Day Mode Start: 6 : 0 (h:mm) Set End: 18 : 0 (h:mm) Set	Day/Night Mode Automatic Day Night Schedule Day Mode	Automatic: Enables the camera to automatically switch from day mode to night mode. User can define the switching level from Day to Night or Night to Day. Day: Forces the camera to stay in day mode. Night: Forces the camera to stay in night mode. Schedule Day Mode: User defined times that the camera remains in day mode.

General Setting Camera Name: AV20576RS-4A Font Border ☐ Text color: White Text Overlay Top Left OFF Top Right OFF Bottom Left OFF Bottom Right OFF	Camera Name Font Border Text Color Text Overlay Off Date/Time Camera Name Camera Name + Date/Time Custom Text	Specifies a name for the camera. The maximum name length is 32 characters. Enables a border for the text overlay. Options are Black, White, Green, or Yellow. There are four content positions (Top Left, Top Right, Bottom Left and Bottom Right) to display the text overlay. Date / Time: Displays the current date/time. It will force the camera to synchronize the date/time information. Camera Name: Displays the camera name you set. Camera Name + Date / Time: Displays both camera name and date/time information. Custom Text: Displays a customized text.
ROI Exit Select channel: 1 * Create custom regions of interest by enabling zones below and selecting the desired quality level. Then create the ROI by dragging the mouse over the live image and press "Save Area" or "Del Area". Stream: Main Stream ROI Zone 1: ☐ Enable Medium Save Area Del Area ROI Zone 2: ☐ Enable Medium Save Area Del Area ROI Zone 3: ☐ Enable Medium Save Area Del Area ROI Zone 4: ☐ Enable Medium Save Area Del Area ROI Zone 5: ☐ Enable Medium Save Area Del Area	ROI (Regions of Interest)	ROI (Regions of Interest) is used to select which areas will be monitored and recorded with higher image quality while using lower image quality for other non-ROI zones in order to save bandwidth and storage. To setup the ROI: 1. Select the desired channel 2. Select Main Stream or Sub Stream 3. Enable zones (up to five zones) and select the desired quality level (High, Medium, or Low) 4. Create the ROI by dragging the mouse over the live image Press Save Area or Del Area

Video & Audio

AVCOSTAR™ AV20576RS Firmware: 65431 MAC: 00-1a-07-1a-a2-4a Presets Focus/PTZ Image Video & Audio Network Privacy Mask Event System Administration Support		
Menu	Feature	Description
Channel Select channel: Sync All Channels ▼	Select channel	Select the desired channel to change video settings or select Sync All Channels to change video settings for all four channels at once.
Main Stream Codec: H.264 ▼ Resolution: 2592x1944 ▼ ☐ Enable SNAPstream+™ ☐ Variable Bitrate ☒ Maximum Bitrate Rate Limit (64-8000 kbps): 4000 H.264 Quality (1...10): 3 * 10 - lowest quality, 1 - highest quality Frames Per Seconds (0~30): 30 GOP Length (1~120): 30 Sub Stream Codec: H.264 ▼ Resolution: 640x480 ▼ ☐ Enable SNAPstream+™ ☐ Variable Bitrate ☒ Maximum Bitrate Rate Limit (64-8000 kbps): 3000 H.264 Quality (1...10): 3 * 10 - lowest quality, 1 - highest quality Frames Per Seconds (0~30): 30 GOP Length (1~120): 30	Video Compression: H.265 / H.264	Radio buttons to select the desired compression.
	Resolution	Radio buttons to select the desired resolution. Options vary based on the sensor resolution being used.
	Enable SNAPstream+™	Enable the SNAPstream+™ feature on the camera. This feature utilizes both Smart GOP and Smart ROI to reduce bitrate without impacting the image quality. Smart GOP sets GOP to automatically increase when no moving objects are detected. Smart ROI will increase the bitrate of moving objects and make them clearer.
	Variable Bitrate	Maintains the Quality settings configured. There may be variation in the bit rate output from the camera when using this mode.
	Maximum Bitrate	Maintains variable bit rate control and maintains the bitrate under the rate limit you choose. It can be set from 64 to 8000 kbps.
	H.264 Quality	H.264 image quality setting for variable bit rate control. Setting a lower value results in higher image quality or setting a higher value results in lower image quality.
	Frames Per Seconds	Frame rate adjustment for the camera video stream.
	GOP Length	Specifies how many frames exist between two consecutive I-Frames.

Third Stream Codec MJPEG ▼ Resolution 640x480 ▼ Quality Middle ▼ Frame Rate (0~30) 5	Codec: MPJEG	The third stream is designed for the live view on web interface, and the only option of video codec is MJPEG.
	Resolution	The third stream is designed for the live view on web interface, and the only option for Resolution is VGA.
	Quality: Low / Mid / High	Adjusts the compression level for JPEG images
	Frame Rate	Frame rate adjustment for the camera video stream.
Codec Audio Encoding Audio Configuration Audio In : • Enable • Disable Audio In Volume : Mid ▼ Audio Out : • Enable • Disable Audio Out Volume : Mid ▼ Encoding : U-Law ▼ Apply	Audio In Enable/Disable Audio In Volume Audio Out Enable/Disable Audio Out Volume Encoding	Enable/Disable: Enables or Disables the Audio In / Audio Out features on the camera. Audio In/Out Volume: Specifies the volume level of Audio In / Audio Out High, Middle, or Low. Encoding: Specifies the encoding algorithm: A-Law or U-Law.

Network



AV20576RS
Firmware: 65431
MAC: 00-1a-07-1a-a2-4a

Presets Focus/PTZ Image Video & Audio Network Privacy Mask Event System Administration Support

Menu	Feature	Description
IP Assignment IP Address: 10.10.45.60 Subnet Mask: 255.255.255.0 Default Gateway: 10.10.45.1 Ports HTTP Port: 80 (80,1024~65535) Second HTTP Port: 8080 (8080,1024~65535) HTTPS Port: 443 (443,1024~65535) DNS Primary DNS: 10.10.0.5 Secondary DNS: 10.10.0.177	IP Assignment: DHCP IP Address Subnet Mask Default Gateway	DHCP: If checked, the camera will attempt to obtain its IP address from the DHCP server available on the network. IP Address: Sets the current IP address of the camera. Subnet Mask: Once set, the camera will use these mask bits to determine if a destination is from a different network. Default Gateway: Once set, the camera will send network traffic to the specified gateway if the destination is on a different network.
	Port: HTTP Second HTTP Port HTTPS	HTTP: The port default is 80. It is used to access the camera via the web browser. Second HTTP Port: Sets an alternative HTTP port. This port can be useful when the standard HTTP port (80) is not appropriate for this camera. HTTPS: The port default is 443. It can be used when you use HTTPS.
	Port: Primary DNS Secondary DNS	Configures the Primary and Secondary DNS.
IPv6 Settings ☐ Enable IPv6 Link-Local: IPv6 Address: Address Prefix: 64 (0~127) Default Route: ☐ Router Advertisement DNS:	IPv6 Settings: Enable IPv6 IPv6 Address Address Prefix Default Route Router Advertisement DNS	Enable IPv6: Enables IPv6 function. Manually configures IPv6 address, Address prefix, Default route, and DNS server address. Router Advertisement: Enables Router Advertisement
	QoS Enable	Enables quality of service.
	QoS Video	Sets DSCP value for video traffic.

☐ QoS Enable QoS Video (0~63) 34 Set Management DSCP (0~63) 0 Set	Management DSCP	Sets DSCP value for non-video traffic.
UPnP ☒ Enable UPnP	Enable UPnP	Enables Universal Plug and Play function.
Basic QoS UPnP RTSP	Select channel	Select the desired channel to change RTSP settings
Channel Select channel: 1 * Video port c	Enable RTSP Unicast Stream	Enables RTSP Unicast for stream 1 (Main stream), stream 2 (Sub Stream), and stream 3 (Third Stream)
Unicast Port: 554 (554, 1025~65535) ☒ Enable RTSP Unicast Stream1 ☐ Enable RTSP Stream1 Metadata Path1 : stream1 Link for external media players : rtsp://10.10.45.60:554/stream1 ☒ Enable RTSP Unicast Stream2 ☐ Enable RTSP Stream2 Metadata Path2 : stream2 Link for external media players : rtsp://10.10.45.60:554/stream2 ☒ Enable RTSP Unicast Stream3 ☐ Enable RTSP Stream3 Metadata Path3 : stream3 Link for external media players : rtsp://10.10.45.60:554/stream3	Enable RTSP Stream metadata	Enables RTSP stream metadata for stream 1 (Main stream), stream 2 (Sub Stream), and stream 3 (Third Stream)
	Path	Configures the pathname for each stream.
	Link for external media players	Copies the link from here for external media players
Multicast Stream1 ☒ Enable RTSP Multicast Stream ☐ Always Multicast Video IP : 225.24.228.121 Video Port : 5016 (1025~65535) Audio IP : 226.24.228.121 Audio Port : 5002 (1025~65535) Meta IP : 227.24.228.121 Meta Port : 5004 (1025~65535) Path : stream1m TTL : 255 (1~255)	Enable RTSP Multicast Stream	Enables RTSP Multicast stream for stream 1 (Main stream), stream 2 (Sub Stream), and stream 3 (Third Stream)
	Always Multicast	Enables the video streams to start multicast streaming without using RTCP
	Video IP	Configures the multicast address and the port number to stream video.
	Video Port	Configures the multicast address and the port number to stream video.
	Audio IP	Configures the multicast address and the port number to stream audio.
	Audio Port	Configures the multicast address and the port number to stream audio.
	Meta IP	Configures the multicast address and the port number to the HTML meta.
	Meta Port	Configures the multicast address and the port number to the HTML meta.
	Path	Configures the URL address of the video stream.
	TTL	Configures the time-to-live threshold of the multicast datagram before it is discarded by the router.

DDNS ☐ Enable DDNS Host Name : DDNS Server : DynDNS ▼ User Name : Password : Password Confirmation :	Enable DDNS Host Name DDNS Sever User Name Password Password Confirmation	Enables DDNS service Specifies the Host name registered with the DDNS server Selects one of the pubic DDNS severs from the dropdown menu. Options are DynDNS, NO-IP, and Twi-DNS. Specifies the user name of the DDNS account. Specifies the password of the DDNS account. Confirms the password of the DDNS account.
SNMP ☒ No SNMP Server ☐ SNMP V2c Public Community String : private Private Community String : Trap Configuration Address : 192.168.1.200 Community String : public ☐ SNMP V3 SNMP User : initial Authentication : None ▼ Password : Privacy : None ▼ Password : Trap Configuration Address : 192.168.1.200 Download MIB	No SNMP Sever SNMP v2c Community String Trap Configuration: Address Community String SNMP v3 SNMP User	Disables SNMP function Enables SNMP version 2 support Specifies the name of the community to access to SNMP information. Specifies the destination IP address to send SNMP trap messages. Enables SNMP version 3 support. Specifies the user name of the SNMP v3.
	Authentication Password Privacy Password Trap Configuration: Address Download MIB	Selects one of the Authentication modes from the dropdown menu. Options are None, MD5, and SHA. Specifies the Password for the Authentication. Selects one of the encryption methods for SNMP v3 from the dropdown menu. Options are DES and AES. Specifies the Password for the encryption. Specifies the destination IP address to send SNMP trap messages. Clicks to download MIB file for SNMP.
SSL Mode : ☐ Disabled ☒ Optional Certificate : No certificate has been installed. Action : Install New Certificate Key PEM file : Choose File No file chosen Certificate PEM file : Choose File No file chosen	Mode Certificate Action Install New Certificate Key PEM file Certificate PEM file	Disabled: Support for HTTP only. Optional: Support for HTTP and HTTPs both. Shows the current status of the Certificate 1. Locate Key PEM file and Certificate PEM file and click Upload. 2. Click Install New Certificate to upload the Certificate.

FTP Server ☐ Enable User name : adminftp Password : Confirm : Max. Connection (1~10) : 10	Enable	Enables FTP access to the camera. NOTE: This function is only available when a SD card is installed. You can access files in the SD card via FTP.
	Password Confirm	Specifies and confirms the password to access the FTP.
	Max. Connection	Specifies the maximum number of FTP connections to the IP camera.
802.1x Protocol : NONE NONE EAP-MD5 EAP-TLS EAP-TTLS EAP-PEAP	Protocol	The default is None to disable 802.1x functions. You can select one of the protocol options from the dropdown menu. The supported protocols are EAP-MD5, EAP-TLS, EAP-TTLS or EAP-PEAP. After the protocol has been selected, manually configure the username, password, and other required information.
LDAP ☐ Enable LDAP Server : Port : 389 (389, 1025~65535) Base dn : dc=ipcamera,dc=com Bind dn template : cn=%u,ou=people,dc=ipcamera,dc=com Search dn template : cn=%u Administrator : cn=admin,ou=groups,dc=ipcamera,dc=com Viewer : cn=user,ou=groups,dc=ipcamera,dc=com	Enable LDAP	Enables LDAP service.
	Server	Specifies the IP address of the LDAP server.
	Port	Specifies the port address of the LDAP server. Default port is 389.
	Base dn	Specifies the starting point an LDAP server uses when searching for user's authentication within the Directory.
	Bind dn template	Identifies the username that will be used to do the searching and request the authentication
	Search dn template	Defines at which node the search originates
	Administrator	Specifies the administrator
	Viewer	Specifies the viewer user

Privacy Mask



AV20576RS
Firmware: 65431
MAC: 00-1a-07-1a-a2-4a

Presets Focus/PTZ Image Video & Audio Network Privacy Mask Event System Administration Support

Menu	Feature	Description
	Enable Privacy Mask	Creates a privacy mask on the image so the selected areas will not be visible.
	Select Channel	Select the desired channel to add privacy masks.
	Drag mouse to: Mask Unmask	Select Mask to add privacy masks or Select Unmask to remove privacy masks.

Event



AV20576RS
Firmware: 65431
MAC: 00-1a-07-1a-a2-4a

Presets Focus/PTZ Image Video & Audio Network Privacy Mask Event System Administration Support

Menu	Feature	Description
Motion Detection Exit ☒ Enable motion detection ☐ Enable extended motion detection Select channel 1 ▼ Zone Size (2..15) 11 Set Object Size Sensitivity (1..225) 2 Set Movement Duration Factor (2..31) 15 Set Motion Sensitivity (1..64) 30 Set	Enable motion detection	Turn on and off on-camera motion detection.
	Enable extended motion detection	Enables the extended motion detection and motion detection zones with an increase from default 64 to 1024 for enhanced motion detection sensitivity.
	Select channel	Select the desired channel to apply motion detection.
	Zone Size	Adjusts the size of motion detection zones.
	Object Size Sensitivity	Sets the size of each zone displayed by the motion detection grid. Contains sub zones where the number of sub zones is set by setting the zone size up to 32x32 (pixels). This setting configures the sensitivity of the motion detection to the size of objects in the image moving through the zone. Higher values will trigger motion only for larger objects moving through the zone, and lower values will cause detection of smaller objects in the zone (increasing sensitivity to smaller size objects moving through the image).
	Movement Duration Factor	Sets the sensitivity to brightness changes between dark and light objects within each grid zone. As an example, "Object Size Sensitivity" will set the size of the object detected within the zone, and "Movement Duration Factor" sets the duration that movement must be maintained to trigger motion detection. Lower settings can increase false motion alarms caused by image noise; higher settings will require more movement to trigger a motion event.
	Motion Sensitivity	Sets the sensitivity to sudden overall brightness changes in the image.

Alarm Handler ☒ Enable Alarm Detection Alarm Schedule	Enable Alarm Detection	Enables Alarm Detection (Alarm In) function.
	Alarm Schedule	Configures the alarm schedule by holding down the mouse button and clicking the time block to enable the schedule settings on the selected time. A light blue color on the time block indicates that the alarm schedule is enabled, while a light grey color indicates that the alarm schedule is disabled. Alternatively, you can manually enter the numbers to configure the hours and minutes for the “start” and “end” of the day. S: Click “S” to set up a 24-hour schedule on a particular day. D: Click “D” to clear the previous schedule on a particular day.
Digital I/O ☐ Trigger Alarm Detection ☐ Trigger Motion Detection ☐ Trigger Tamper Detection ☐ Trigger Network failure Type N.O. ▼ Off Time 0 (0~30s)	Trigger Alarm Detection	When a signal is detected from Alarm in the Alarm out will be triggered.
	Trigger Motion Detection	When a motion event is detected the Alarm out will be triggered.
	Trigger Tamper Detection	When a tamper event is detected, the Alarm out will be triggered.
	Trigger Network Failure	When a network failure event is detected the Alarm out will be triggered.
	Type	Selects the type: N.O (Normally Open) or N.C. (Normally Closed)
	Off Time	Specifies the alarm duration

Tampering Detection Select channel: 1 ▼ ☐ Enable Tampering Detection Tampering Schedule Sensitivity: Medium ▼	Select channel	Select the desired channel to enable tampering detection.
	Enable Tampering Detection	Enables Tampering Detection function.
	Tampering Schedule	Configures the alarm schedule by holding down the mouse button and clicking the time block to enable the schedule settings for the selected time. A light blue color on the time block indicates that the alarm schedule is enabled, while a light grey color indicates that the alarm schedule is disabled. Alternatively, you can manually enter the numbers to configure the hours and minutes for the “start” and “end” of the day. S: Click “S” to set up a 24-hour schedule for a particular day. D: Click “D” to clear the previous schedule for a particular day.
	Sensitivity	Configures the sensitivity level of Tamper Detection: High , Medium , and Low .
Network Failure ☐ Enable Network Failure	Enable Network Failure	Enable network failure detection.
SD Record Handler ☐ Enable - Trigger Alarm Detection - Trigger Motion Detection - Trigger Tampering Alarm - Trigger Network Failure - Manual Record	SD Record Handler Enable	Enables and selects a desired trigger source. The options are Trigger Alarm Detection, Trigger Motion Detection, Trigger Tampering Alarm, Trigger Network Failure, and Manual Record.

SD Card Information Available Storage : 0 MBytes Usage : 0% (0 / 0 MBytes) Status : not_mounted Overwrite when storage full : ☒ Record Type : Video ▼	SD Card Information Available Storage Format SD Card Usage Status Overwrite when storage full Record Type	Available Storage: Displays the available storage of the SD card if it is installed. Format SD Card: Erases all the data stored on the SD Card. Usage: Displays the total storage that has been used now. Status: Displays the status whether the SD card is installed or not. (not mounted or ok) Overwrite when storage full: Enables overwriting the SD card if the storage is full. Recording Type: Specifies the desired action to record a stream. The options are Snapshot and Video.
FTP Upload Handler ☒ Enable Trigger Event - Trigger Alarm Detection - Trigger Motion Detection - Trigger Tampering Alarm - Trigger Scheduled	FTP Upload Handler Enable Trigger Event	Enables and selects a desired trigger source. The options are Trigger Alarm Detection, Trigger Motion Detection, Trigger Tampering Alarm, and Trigger Scheduled.
Remote Server Host Address : Port : 21 (21, 1025~65535) Username : Password :	Remote Server Host Address Port Username Password	Host Address: Specifies the host name or IP address of the FTP server. Port: Specifies the port number of the FTP server. Username: Specifies the login username of the FTP server. Password: Specifies the login password of the FTP server.
SMTP Notification Handler From : ☒ Trigger Alarm Detection ☒ Trigger Motion Detection ☒ Trigger Tampering Alarm	SMTP Notification Handler	From: Specifies the email address of the sender Select a desired trigger source. The options are Trigger Alarm Detection, Trigger Motion Detection, and Trigger Tampering Alarm.

SMTP Server Host Address : Port : 25 (1~65535) Username : Password : Authentication : NO_AUTH	SMTP Server Host Address Port Username Password Authentication	Host Address: Specifies the host name or IP address of the SMTP server. Port: Specifies the port number of the SMTP server. Username: Specifies the login username of the SMTP server. Password: Specifies the login password of the SMTP server. Authentication: Specifies the authentication mode of the SMTP sever. The options are NO_AUTH, SMTP_PLAIN, LOGIN and TLS_TLS.																																																							
Recipient List <table><thead><tr><th>Enable</th><th>No</th><th>Email</th><th>Alarm</th><th>Motion</th></tr></thead><tbody><tr><td>☐</td><td>1</td><td> </td><td>☐</td><td>☐</td></tr><tr><td>☐</td><td>2</td><td> </td><td>☐</td><td>☐</td></tr><tr><td>☐</td><td>3</td><td> </td><td>☐</td><td>☐</td></tr><tr><td>☐</td><td>4</td><td> </td><td>☐</td><td>☐</td></tr><tr><td>☐</td><td>5</td><td> </td><td>☐</td><td>☐</td></tr><tr><td>☐</td><td>6</td><td> </td><td>☐</td><td>☐</td></tr><tr><td>☐</td><td>7</td><td> </td><td>☐</td><td>☐</td></tr><tr><td>☐</td><td>8</td><td> </td><td>☐</td><td>☐</td></tr><tr><td>☐</td><td>9</td><td> </td><td>☐</td><td>☐</td></tr><tr><td>☐</td><td>10</td><td> </td><td>☐</td><td>☐</td></tr></tbody></table>	Enable	No	Email	Alarm	Motion	☐	1		☐	☐	☐	2		☐	☐	☐	3		☐	☐	☐	4		☐	☐	☐	5		☐	☐	☐	6		☐	☐	☐	7		☐	☐	☐	8		☐	☐	☐	9		☐	☐	☐	10		☐	☐	Recipient List	Specifies the email addresses to send the email notification when selected events are triggered by Alarm, Motion, or Tamper. A maximum of 10 email addresses can be configured.
Enable	No	Email	Alarm	Motion																																																					
☐	1		☐	☐																																																					
☐	2		☐	☐																																																					
☐	3		☐	☐																																																					
☐	4		☐	☐																																																					
☐	5		☐	☐																																																					
☐	6		☐	☐																																																					
☐	7		☐	☐																																																					
☐	8		☐	☐																																																					
☐	9		☐	☐																																																					
☐	10		☐	☐																																																					
Network Storage Handler ☐ Enable Trigger Event ☐ Trigger Alarm Detection ☐ Trigger Motion Detection ☐ Trigger Tampering Alarm ☐ Trigger Scheduled	Network Storage Handler	Enables and selects a desired trigger source. The options are Trigger Alarm Detection, Trigger Motion Detection, Trigger Tampering Alarm, and Trigger Scheduled.																																																							
Recipient Setup Network Storage Status : not_mounted Network Address : Folder Name : Record Type : Video	Recipient Setup Network Storage Status Network Address Folder Name Record Type	Network Storage Status: Displays the current status of the connection with the network storage server. (Status will display “Not Mounted” or “OK”) Network Address: Specifies the IP address of the network storage server. Folder Name: Specifies the folder name on the network storage server. Recoding Type: Specifies the desired action when an event is triggered. The options are Snapshot and Video.																																																							

Login Certificate Username : Password :	Login Certificate	Specifies the login Username and Password for the network storage sever.
Mount and Remove Network Storage Mount	Mount and Remove Network Storage	Mount: Sets up a network connection with the network storage server. All the video recordings or snapshots from event triggers will be uploaded to the network storage server. After the setting is complete, the Network Storage Status field will display “ok”. Remove: Deletes the previous setting. After the setting is removed, the Network Storage Status field will display “not mounted”.


System

AVCOSTAR™

AV20576RS
Firmware: 65431
MAC: 00-1a-07-1a-a2-4a

Presets Focus/PTZ Image Video & Audio Network Privacy Mask Event **System** Administration Support

Menu	Feature	Description
Camera information Model Name AV20576RS Firmware 65431 MAC Address 00-1a-07-1a-a2-4a Serial Number TSCB51013959	Camera information	Displays the information of the camera: Model Name, Firmware, MAC Address, and Serial Number.
Camera Name AV20576RS-4A Save	Camera Name	Specifies a name for the camera. The maximum name length is 32 characters.
Firmware Upgrade Please select a file to update: Choose File No file chosen Upgrade	Firmware Upgrade	Clicks "Choose File" to choose the firmware upgrade file, and then click Upgrade.
Download Log Download	Download Log	Records all the status information of the camera in list format. Downloads the log file to the computer as a text file. NOTE: The log file is protected by a password. Please contact with AV Costar technical support team.
Reboot the Camera Restore to Factory Default Settings Except Network Settings Restore to Factory Default Settings	Reboot the Camera Restore Factory Default Settings Except Network Settings Restore to Factory Default Settings	Reboot the Camera: Reboots the camera. Restore Factory Default Settings Except Network Settings: Restores all settings to factory default except the network settings. Restore to Factory Default Settings: Restores all settings to factory default.
Configuration Management Importing: Choose File No file chosen Import Exporting Export	Configuration Management	Records all the configuration information of the camera except network settings. Import: Imports a Configuration file from other cameras. Export: Exports a Configuration file from this camera.

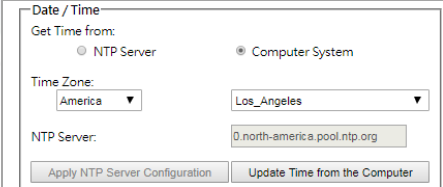	Date/Time Get Time from NTP Server Computer System	NTP Server: Synchronizes the date/time information with defined NTP server. After setting up the desired Time zone and NTP Server, click “Apply NTP Server Configuration.” NOTE: Please make sure to set up appropriate gateway before configuring the NTP server. Computer System: Synchronizes the date/time information with current computer’s date/time. Once this option is selected, click “Update Time from the computer.”
	Time Zone	Specifies the country / city of the time zone from the drop-down menu.
	NTP Server	Specifies the desired NTP server

Administration



AV20576RS
Firmware: 65431
MAC: 00-1a-07-1a-a2-4a

Presets Focus/PTZ Image Video & Audio Network Privacy Mask Event System **Administration** Support

Menu	Feature	Description
Administrator Username admin Admin Password Confirmation Set Erase	Access Control	Passwords can be up to 16 letters, digits and symbols, excluding the following symbols for passwords without encoding # % & ' " < > / [] { } _ () = . + ,
Viewer Management User List : Add Delete User Information User Viewer Name User Viewer password Confirmation Access Level ☐ Admin ☐ Viewer Set Erase	Administrator Username Admin Password Confirmation Set/ Erase	Username: The username of Administrator is admin and cannot be changed. Admin: includes full access to all camera settings and live video. Admin Password: Specifies the password for the administrator. Confirmation: Re-enters the password for the password validation. Set / Erase: Saves or removes the password. NOTE: If admin password was set but has been lost, it can be erased by AV IP Utility using the key file. Please contact Arecont Vision Costar technical support to obtain the key file required to perform this function. Or, if the camera has a reset button, you can also reset it to Factory default to remove the password.
	Viewer Management User List User Viewer Name User Viewer Password Confirmation Access Level Set/ Erase	User List: Displays current user accounts created on the camera. Clicks New User/ Delete User to create or remove a user account. User Viewer Name: Specifies the user name. It must be at least five and up to sixteen characters. User Viewer Password: Specifies the password for the viewer. Confirmation: Re-enters the password for the password validation. Access Level: Defines the authorization level for the user: Admin or Viewer. Set/ Erase: Save or removes the password.

Support



AV20576RS
Firmware: 65431
MAC: 00-1a-07-1a-a2-4a

Presets Focus/PTZ Image Video & Audio Network Privacy Mask Event System Administration Support

Menu	Feature	Description
Support Resources Online Support Request Firmware Downloads Software Downloads Technical Updates Product Selector Downloads	Support	Provides several hyperlinks to get more information on the camera.



© 2022 AV Costar™


All rights reserved. No part of this publication may be reproduced by any means without written permission from AV Costar.

The information in this publication is believed to be accurate in all respects. However, AV Costar cannot assume responsibility for any consequences resulting from the use thereof.

The information contained herein is subject to change without notice. Revisions or new editions to this publication may be issued to incorporate such changes.

+1.818.937.0700 | www.avcostar.com | avsales@arecontvision.com

Rev 002.001

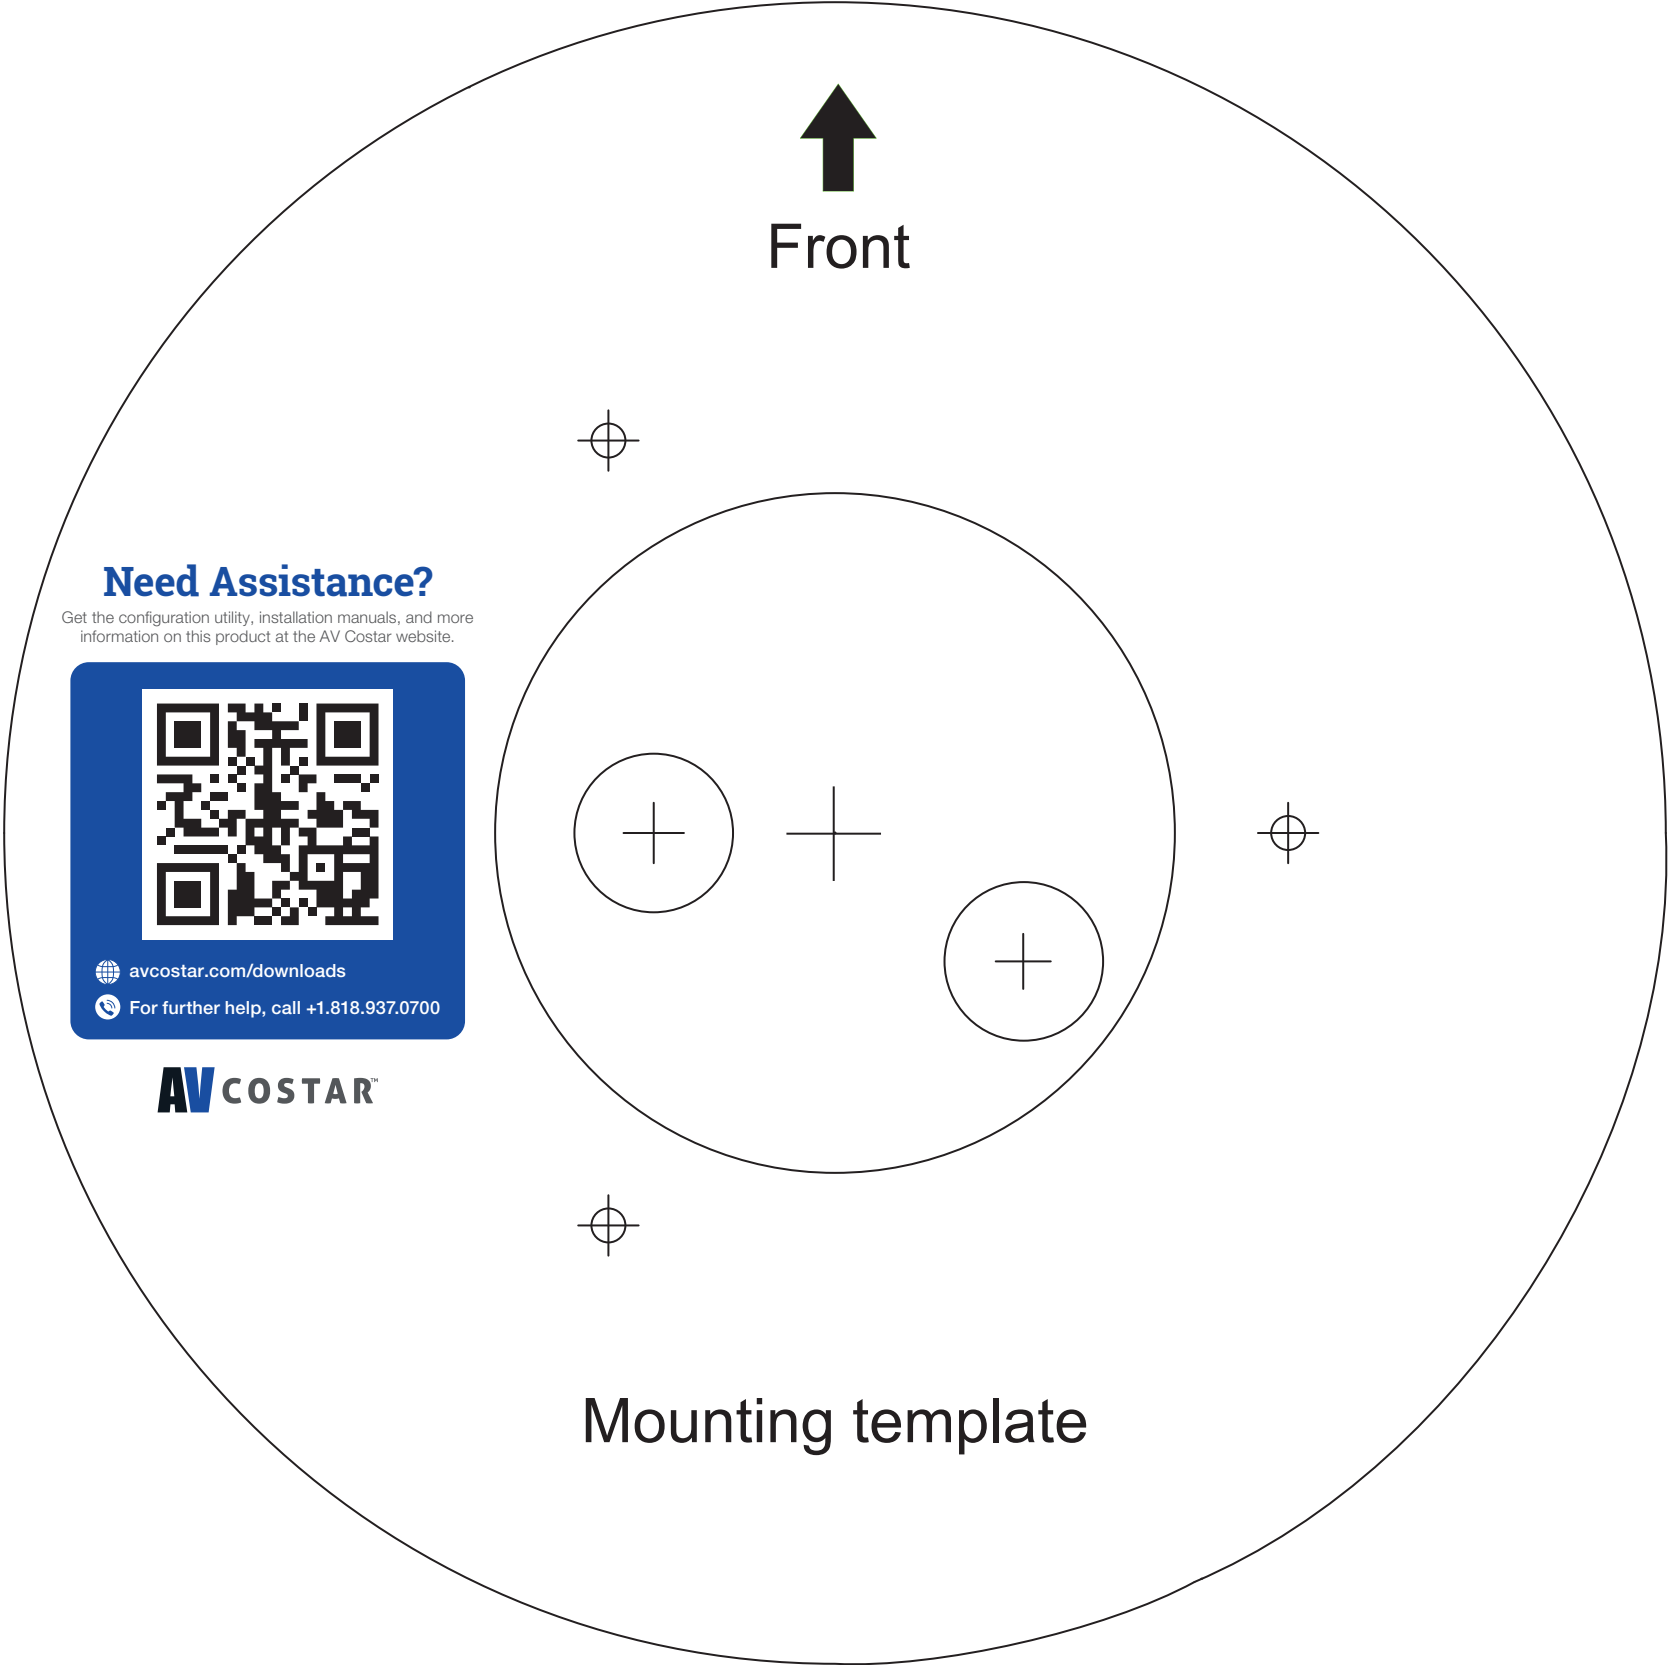

This template requires tabloid (11"x17") paper.